Wireless World

OCTOBER 1952 · TWO SHILLINGS

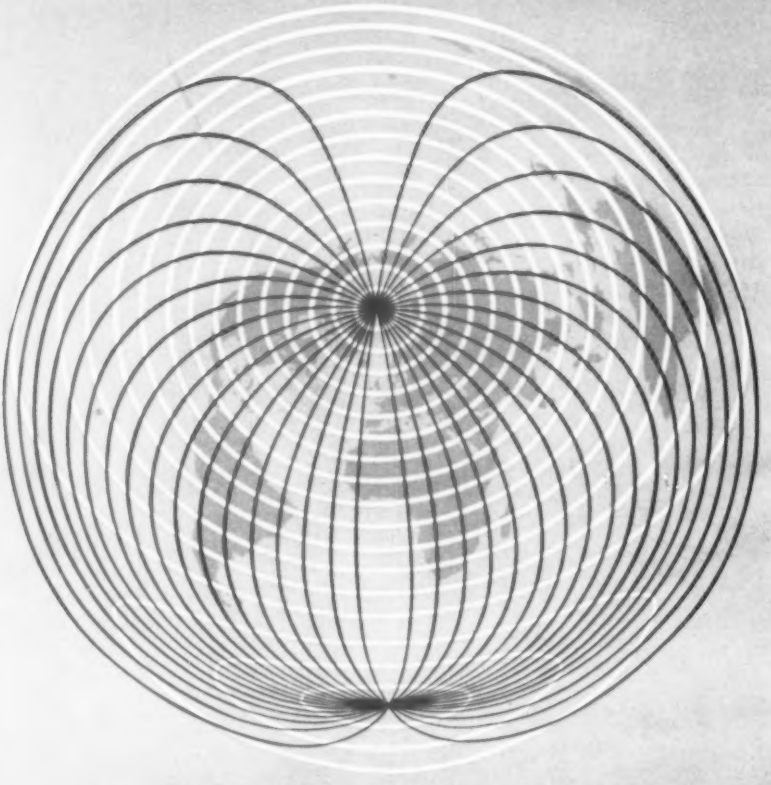

RADIO, TELEVISION AND ELECTRONICS

BICC

As the World's foremost manufacturers of electric cables and their ancillary equipment BICC have made many important contributions towards the technique of British Television. Some of these are described here.

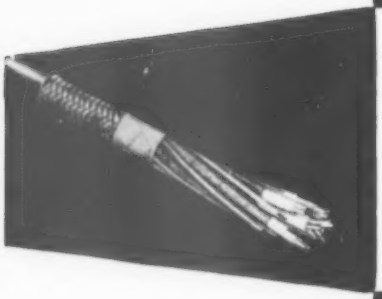

T/V CAMERA CABLE

Close collaboration with equipment designers has enabled BICC to develop a symmetrically designed camera cable which is small, strong and flexible. Only ·850" in diameter, it contains 36 separate conductors and is the sole link necessary with the control panels.

POLYPOLE CABLE COUPLER

This is a moulded-on coupler. It is the most successful means devised for overcoming the problems of conductor end breakages and its great mechanical strength ensures a long trouble-free life. The requirements of reliable contact and adequate screening are fully met.

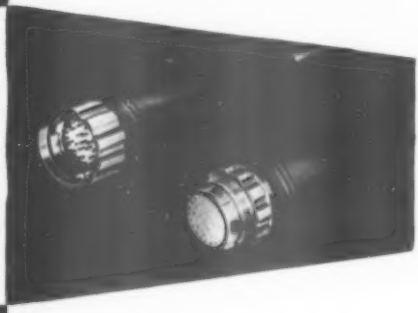

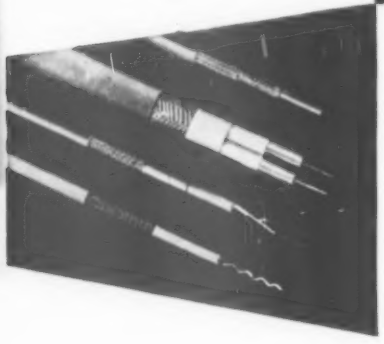

R.F. CABLES

BICC manufacture many types of R.F. Cables covering all normal telecommunication and electronic requirements involving frequencies up to 1,000 Mc/s and higher. They are available with coloured sheaths for circuit identification and are extensively used in this form in B.B.C. Television Studios.

In addition to the manufacture of cables for television, ranging from Trunk Coaxials to T/V Downleads, BICC can supply all the power distribution and low voltage cables necessary for the reliable operation of Studios and Transmission Stations etc.

Information on all BICC Products for Television is freely available on request.

B.I. Callender's

BRITISH INSULATED CALLENDER'S CABLES LIMITED
NORFOLK HOUSE, NORFOLK STREET, LONDON, W.C.2

WHEN YOU THINK OF A VALVE TESTER...

What do you expect ?

The answer is, of course, not to think of an emission tester when you can have so much more. Here is a precision measuring instrument that will not only give a quick good/bad verdict on any receiving valve, small transmitting valves, etc., but will also provide the electronic engineer and designer with accurate facts about any valve under working conditions.

12 GOOD REASONS for the success of The AVO Valve CHARACTERISTIC Meter

Price **£60**

Complete with quick-reference Data manual containing data covering more than 3,000 British, American and Continental valves, plus approximately 1,200 Service equivalents.

Plus **FREE INFORMATION SERVICE**

The completion and return of the registration card within the Manual will bring you from time to time additional data set out in such a manner that it can be inserted in the Manual in correct alphabetical and numerical sequence.

1. Whilst its features make it invaluable for the **skilled** radio and television engineer, it can be used as a reliable good/bad indicator by any **unskilled** operator of normal intelligence.
2. It is more than an emission tester . . . it enables the slope of a multi-electrode valve to be checked at any point between 0 and − 100 V. on the control grid.
3. A special form of polarised relay is incorporated to give protection against inadvertent overloads or valve failure.
4. With the exception of a small diode, there are no internal electronic components to deteriorate or break down and cause misleading readings. Thus no expensive periodical replacements are required.
5. The comprehensive Data Book supplied free with the instrument facilitates the rapid checking of over 3,000 different types of valve. The instrument can be used, however, with complete accuracy by employing any other data available, thus bringing obsolete and experimental valves within its scope.
6. It enables I_a/V_a, I_a/V_g, I_a/V_s, etc., characteristics to be plotted.
7. It detects grid current **and** indicates its direction and magnitude.
8. It measures inter-electrode insulation in rotation with valves cold or hot, also cathode heater insulation with the valve hot, and indicates any breakdown below 10 megohms.
9. Rectifiers and Signal Diodes can be subjected to maximum operating load.
10. It subjects the valve under test to working voltages.
11. It will carry out tests on small thyratrons, tuning indicators, etc.
12. It is fitted with bases for **all valves in current use** and adaptors will be available to keep the instrument fully up to date as new bases come into use.

Write for fully descriptive pamphlet, or for complete catalogue of all "Avo" Instruments.

THE AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT CO. LTD.
WINDER HOUSE • DOUGLAS STREET • LONDON S.W.1 *Telephone* VICtoria 3404—9

VC.4

GOODSELL

HIGH FIDELITY SOUND EQUIPMENT

Type MA15 Amplifier £19 10 0

U/TC Wide Range Tone Control £8 15 0

F/U/TC as above with sharp cut off filter..... £12 12 0

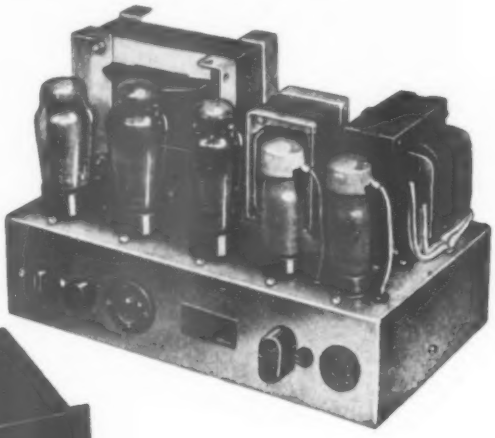

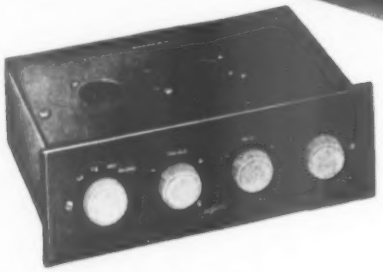

Type MA15 Amplifier is the latest addition to our range and our wide experience of quality reproduction has been used to produce this highly developed unit. The output transformer is of special design having all the characteristics which are necessary in amplifiers having high overall feedback and a wide margin of stability.

NOTE THESE FEATURES :—

- Less than 0.1% distortion and minus 80dB noise level at 12 watts output.
- Sturdy design for trouble-free life including adequately rated transformers, paper reservoir condenser and best quality components.
- Clean layout with tagboard sub-assembly.
- Power output of 12 watts from 1.5 volt input using two EL37 pentodes, triode connected, in the output stage.
- Overall feedback greater than 20dB.
- Finish—the steel chassis is heavily primed and stove enamelled polychromatic grey.
- Can be supplied tropicalised and completely enclosed in top steel cover if required, at small extra cost.

The Type U TC Wide Range Tone Control also represents the latest design and has been arranged to accept inputs from either crystal or low output magnetic pickups including the moving coil and radio.

Type F U TC is similar to the above, but includes a steep cut filter operating at selected frequencies. This type of filter has proved itself superior to any other form of low pass arrangement as the response may be maintained fully up to the point at which it is desired to cut.

These types of unit use feedback in every stage thus both are complementary to either the new MA15 or the standard Williamson amplifier, because of their low distortion characteristics and effective operation. Demonstrations at : Webb's Radio, 14, Soho Street, London W.1. Gerrard 2089 ; B-K Partners Ltd., 229, Regent Street, London, W.1. Regent 1267.

Full details of above, tuners and Williamson amplifiers available from :—

GOODSELL LTD., 40 GARDNER STREET, BRIGHTON, 1

Telephone : Brighton 26735

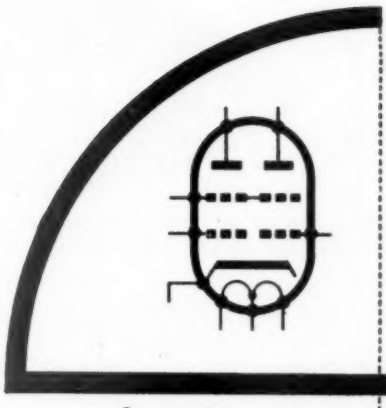

PRINCIPAL CHARACTERISTICS OF THE QQV03-20

HEATER	Series	Parallel
V_h	12.6 V	6.3 V
I_h	0.65 A	1.2 A

CAPACITANCES

Each Section

C_{g1-all}	6.5 μμF
C_{a-all}	2.0 μμF

Two Sections in Push-Pull

C_{out}	1.3 μμF
C_{in}	4.0 μμF

LIMITING VALUES

As Class "C" push-pull amplifier for C.W. Telegraphy or for F.M.

V_a max.	600 V
p_a max.	2 x 10 W
V_{g2} max.	250 V
p_{g2} max.	2 x 2 W
V_{g1} max.	-75 V
p_{g1} max.	2 x 0.5 W
I_k max.	2 x 55 mA
f max. (at reduced ratings)	600 Mc/s

BASE B7A



A high performance Double Tetrode for the new U.H.F. waveband allocations

PROVIDING 15 watts output at 500 Mc/s, and with an effective upper frequency limit of 600 Mc/s, this new Mullard double tetrode, the QQV03-20, is an ideal valve for communications equipment designed to operate in the new U.H.F. wave-band allocations.

As a result of new and important design features, this valve has the outstanding advantages of high anode efficiency, excellent power gain, low filament consumption, and small physical dimensions. In addition, being of conventional all glass technique, the QQV03-20 does not require the complex and expensive circuitry that is normally associated with the disc-seal type of U.H.F. valves.

This double tetrode has special advantages in compact communications equipment, where, due to its small size and low filament consumption, it enables maximum savings in space to be made.

Brief technical details of the QQV03-20 are given above. More comprehensive information will be gladly supplied on request.

Mullard

MULLARD LTD., COMMUNICATIONS & INDUSTRIAL VALVE DEPT., CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, W.C.2

MVT 126

FOR HIGH FIDELITY RECORDINGS

"SCOTCH BOY" MAGNETIC RECORDING TAPE TYPE MCHIII

Careful design and rigid control in manufacture, provide the critical listener with a reliable hard-wearing tape that will help to get the very best results from any tape recorder.



MAGNETIC DATA

Coercivity . . . . . 240-260 Oersteds
Total Remanent Flux . . 0.4/0.5 lines ¼in. width
Uniformity throughout a reel . . . . . ±0.5 d.b.

FREQUENCY RANGE
50 c/s to 10 Kc/s at a playing speed of 7½ in./sec.

Medium coercivity gives a high signal output with an extended high-frequency response, whilst still retaining an easy erasure. Signal noise ratio is high; transfer and distortion are negligible.

PLAYING TIMES (per track)

REELS	1¼"/SEC	3¾"/SEC	7½"/SEC	15"/SEC
1200 Ft.	120 Min.	60 Min.	30 Min.	15 Min.
600 Ft.	60 Min.	30 Min.	15 Min.	7½ Min.
300 Ft.	30 Min.	15 Min.	7½ Min.	3¾ Min.

If you want advice on tape-recording problems, our entire technical knowledge is at your disposal.
Write to:— MINNESOTA MINING & MANUFACTURING CO. LTD., 167 Strand, London, W.C.2. *Telephone: TEMple Bar 6363*

More and more "Wireless World" enthusiasts are using Richard Allan products because quality is there!

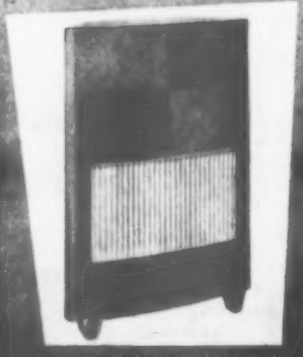

PRESTIGE High Fidelity Reproducer with hand built Chassis

CHASSIS
Speaker Units. Seven models sizes 5" to 10"

RECORD PLAYERS
Single speed and 3 speed Single and Autochange. Walnut Cabinets

Richard Allan sound throughout

sold by most Radio Retailers

RICHARD ALLAN RADIO LTD., BAFFLETTE HOUSE, BATLEY, YORKSHIRE

B.W.

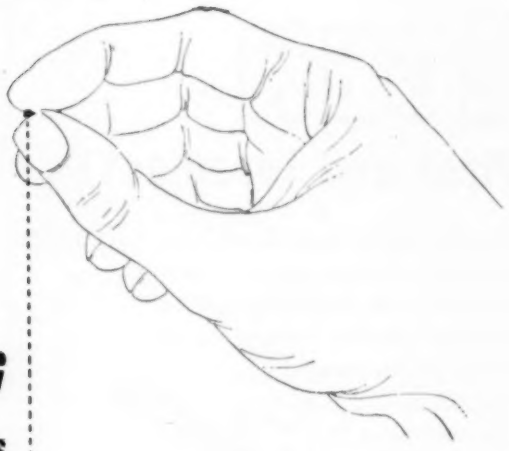

FAULTLESS FLUXING

GIVES

PRECISION SOLDERING

DEMANDS Superspeed

* Enthoven Superspeed has a continuous stellate core of ACTIVATED Rosin which gives an exceptionally high wetting and spreading power, enabling the flux and solder to be drawn rapidly by the force of capillary attraction into restricted spaces, even in the vertical plane. The activating agent volatilizes at soldering temperature.

* The distinctive stellate core ensures a more rapid release of flux and therefore immediate wetting by the solder, at moderate soldering-bit temperatures that lessen the risk of alteration to the electrical and mechanical properties of components.

* The flux in Enthoven Superspeed is always released in exactly the correct proportion. Dry and H.R. joints due to underfluxing or overfluxing cannot occur. One application of Superspeed always does the job effectively.

* The residue from Superspeed flux is non-corrosive and non-hygroscopic. It solidifies immediately to a hard, transparent film of high dielectric strength and insulation resistance.

SAVES TIME, CUTS COSTS

Superspeed

"WHITE FLASH" *activated rosin-cored solder for general electrical, electronic and telecommunication work, and all standard uses. A.I.D. and G.P.O. approved. Complies with M.O.S. Specification DTD 599.*

AN ENTHOVEN PRODUCT

Made by

H. J. ENTHOVEN & SONS, LTD.

89 Upper Thames Street, London, E.C.4. Tel: Mansion House 4133 who will gladly send you their comprehensive Superspeed booklet. Technical advisers are available for free consultation.

EGEN

first and foremost!

Egen Potentiometers are recognised everywhere for their dependability and are constantly being specified by radio and electronic engineers. A specialised carbon deposition guarantees perfect electrical stability. Note these features:—

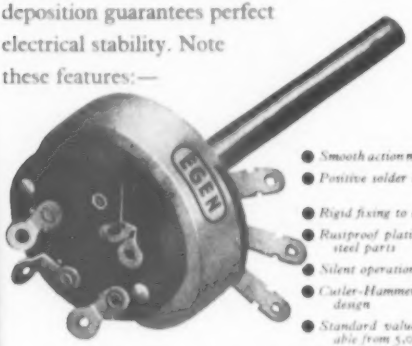

- *Smooth action movement*
- *Positive solder tag location*
- *Rigid fixing to chassis*
- *Rustproof plating of all steel parts*
- *Silent operation*
- *Cutler-Hammer switch design*
- *Standard values available from 5,000 ohms to 2 megohms.*

Egen Potentiometers are also available with single pole or double pole switch and without switch. Switches only supplied separately if required.

PRE-SET RESISTORS.
A wire-wound pre-set resistor for panel or chassis mounting. Multi-unit banks available to special order.



SUB MINIATURE VOLUME CONTROL
For use in Deaf Aids and other miniature electronic apparatus.

Overall diameter less than ½"

Export enquiries welcomed

EGEN
POTENTIOMETERS

EGEN ELECTRIC LTD.
Charfleet Industrial Estate, Canvey Island, Essex. 'Phone: Canvey 691 & 2

BK NON-RESONANT CORNER BAFFLE

Model SVC SAND FILLED
LIST PRICE
12 GNS.
MODELS ALSO AVAILABLE FOR 12" AND 15" UNITS

An artistic corner cabinet giving a clean, distortionless, wide frequency range of reproduction with 8" and 10" speaker units. Of sturdy, laminated wood construction, individually hand finished in light, dark, medium, reproduction oak, mahogany or walnut to order.

SPECIFICATION: *36" high x 22" wide. 5" wings. Wall space: 21" each side of corner. Volume: 4½ cu. ft. Density 2·8 gms. per centimetre. Wings, front and lid have 1" cavity sand filled. Gold aluminium mesh and sub-baffle for 8" or 10" units.*

Come and hear them!

GOODSELL SOUND

We hold a complete range of these famous amplifiers (including the Williamson), pre-amplifiers and Tuner units.

Come and hear them!

Brochure with full details and prices available on request. Trade inquiries invited.

NOTE If you are interested in really high quality reproduction at a reasonable outlay YOU WILL BE CORDIALLY WELCOMED at our Demonstration Rooms in Regent Street EVEN THOUGH YOU MAY NOT BE BUYING AT THE MOMENT! If you are out of town, write for name of your nearest approved stockist with demonstration facilities.

B·K
PARTNERS LTD
229 REGENT ST.,
LONDON,
W.1

Telephone:
REGENT 1051

ADVANCE COMPONENTS LTD., BACK ROAD, SHERNHALL STREET, LONDON, E.17 Telephone : LARkswood 4366/7/8

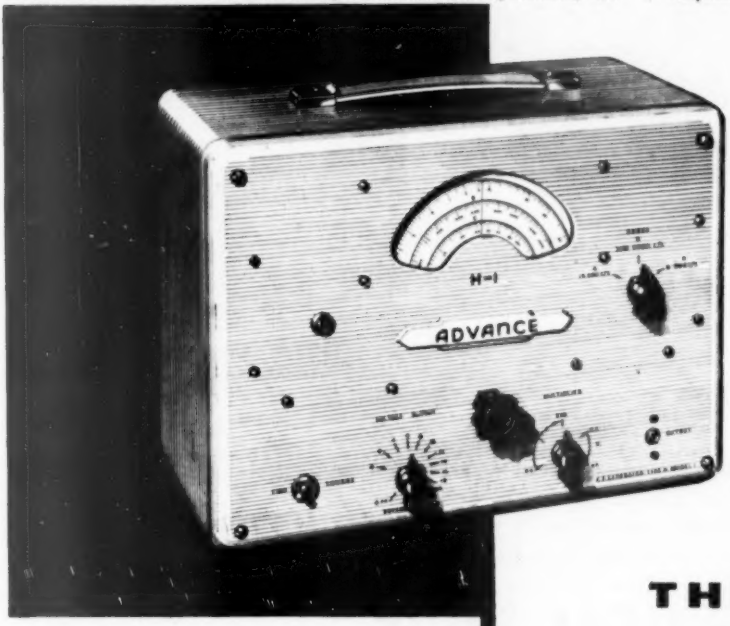

THE ADVANCE TYPE H1

The Advance type H1 Audio Signal Generator completely covers the unusually wide range of 15 c/s to 50,000 c/s. It is characterised by its extremely low distortion and level output over the entire range; provides both sine and square wave output. A robust, reliable and accurate instrument for the discriminating service engineer

● *Accuracy ± 1%, ± 1 c/s.* ● *Distortion less than 1% at 1,000 c/s.* ● *Output from 200 microvolts to 20 volts with accuracy of ± 2 db.* ● *Weight 14 lb.* ● *Size 13½" × 10½" × 8"*

Full technical details available in Folder S.16/W.

Advance audio generator

ADVANCE COMPONENTS LTD., BACK ROAD, SHERNHALL STREET, LONDON, E.17 Telephone : LARkswood 4366/7/8

PULSE INSTRUMENTATION BY SOLARTRON

PULSE GENERATOR

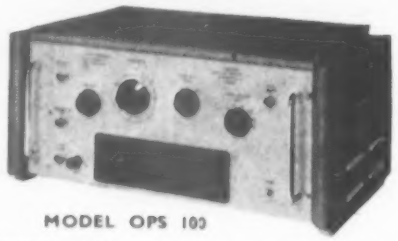

MODEL OPS 100

PULSE WIDTH: Continuously variable 1 — 100 microseconds.

PULSE OUTPUT: 1 — 70 volts positive.

PULSE DELAY: Variable 2 — 4,000 microseconds from sync output pulse.

RISE TIME: Less than 1 microsecond.

TRIGGER REPETITION RATES:
1 — 50,000 p.p.s. for pulse input.
50 — 50,000 p.p.s. for sinewave.

VIDEO AMPLIFIER

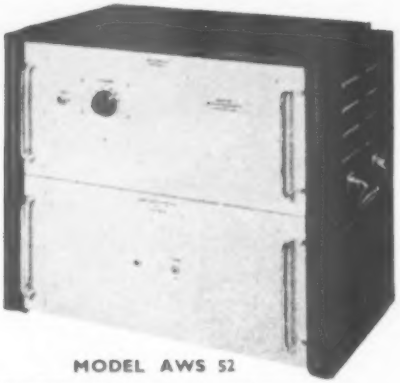

MODEL AWS 52

FREQUENCY RESPONSE: 50 c/s — 20 mc/s ± 1·5 db
NATURAL RISE TIME: ·02 microseconds.
GAIN: 50 db adjustable on attenuator in 10 db steps.
OUTPUT: 150 volts peak to peak, push pull

These two instruments form an ideal combination for testing all types of pulse circuitry. Of particular note is the very wide band width of the Video Amplifier, enabling pulses of extremely short duration to be viewed on a C.R.T.

Write for details of these and other instruments to :—

SOLARTRON LABORATORY INSTRUMENTS LTD., 22 High St., Kingston, Surrey. KINGSTON 0981 P.B.X.

TECHNICAL BOOK SERVICE for the Radio Industry

For all your technical books and periodicals you need go no further than the nearest shop or bookstall of W.H.S. Whilst it is not practicable to maintain a big stock of such books at every branch—the Daily Supply Service from Head Office will quickly deliver the books you want to your local branch.

We will gladly supply lists of the standard works on any subject and welcome inquiries from students and librarians.

W. H. Smith & Son

TECHNICAL BOOK SERVICE

HEAD OFFICE: STRAND HOUSE, LONDON, W.C.2

★ Our Postal Service can send technical books and periodicals to any address at Home or Overseas.

E·L·AC

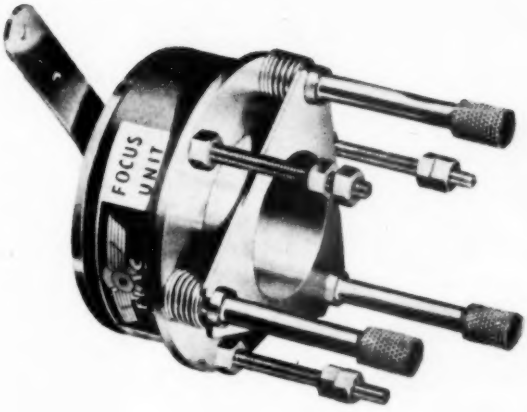

TELEVISION COMPONENTS

MARK II SERIES
"THIN LENS"

P.M. Focus Units provide even focus over the whole tube face giving accurate picture positioning and easy vernier focus adjustment.

TYPE R17/MK.II	for	MULLARD	MW 22-16, MW31-16, etc.	28/6 LIST
TYPE R20/MK.II	for	BRIMAR	C9B FERRANTI T92, T12/2, etc.	30/- LIST
TYPE R25/MK.II	for	MAZDA	CRM 121, etc.	32/6 LIST
TYPE W20/MK.II	for	MULLARD	MW 36/22	50/- LIST
TYPE W22/MK.II	for	MULLARD	MW 41/1	52/6 LIST
TYPE W25/MK.II	for	BRIMAR	C14 BM, C17 BM	57/6 LIST

ELECTRO ACOUSTIC INDUSTRIES LTD

STAMFORD WORKS, BROAD LANE, TOTTENHAM, N.15. Tel.: STAmford Hill 5606-8

This MARKS THE SPOT...
FOR AERIAL NEWS AND VIEWS

The NEW "EXSTAT" for the suppression of radio interference

We have pleasure in announcing the release of the new 'Exstat' fully screened antistatic aerial system for elimination of radio interference. The transformers are of entirely new design and achieve a new high level of performance which has been achieved by using the most up-to-date technique and specialised materials which have now been developed. Special high permeability ferrite cores and the latest winding technique are used for these wide band transformers giving maximum signal transfer and impedance matching over the *entire* wave band between 10—3000 metres.



Model ASA312. Vertical Rod Chimney lashing. 'Exstat' equipment, 50ft. screened cable, 15ft. Rod and complete lashing equipment as shown. **List Price £8 16 -.**
Model ASA312W. As Model 312 but for wall mounting. **List Price £8 6 -.**
Model ASA313. As Model 312 but for mast head mounting. **List Price £8 6 -.**
Model ASA301. Complete Kit for Horizontal Span. 'Exstat' equipment, 50ft. screened cable, aerial wire, rope insulators etc. **List Price £5 15 -.**

Full details in Leaflet G.50/W from Sales Division

ANTIFERENCE Aerials

ANTIFERENCE LIMITED 67 BRYANSTON ST LONDON W.1

B.A. SCREWS, NUTS, WASHERS, ETC.

Prices per Gross

		Brass Nuts		Brass Washers
Assd. Screws	2/6			
Assd. Nuts	2/6	OBA Full 6/9	Lock 6/-	Assd. 1/6, OBA 2/-
Screws and Nuts ¼ gr. each	2/6	2BA .. 5/6	.. 5/-	1BA 2/-, 2BA 1/10
		4BA .. 5/-	.. 4/-	3BA 1/9, 4BA 1/8
Brass Screws		5BA .. 4/-	.. 3/9	5BA 1/6, 6BA 1/6
Assorted		6BA .. 4/-	.. 3/6	8BA 1/6
2BA 5/6, 4BA 5/-, 6BA 4/6		7BA .. 4/6		
8BA 4/-, 8BA 4/6		8BA .. 4/6	.. 4/-	

Soldering Tags, Assd. 2/-. 2BA 2/3, 4BA 2/-, 6BA 1/10, 8BA 1/10. Eyelets and Rivets, assd. 1/6. Aluminium Rivets, assd., 1/6. Br. Knurled Terminal Nuts, 6BA 8d., 4BA 1/-, 2BA 1/6 doz. Br. Terminals, w/nuts, heavy type, NP, 6d. each, 5/6 doz. GRUB SCREWS, Assd. 1/6, 6BA 1/3, 4BA 1/4, 2BA 1/6 per 3 doz.

A SELECTION FROM OUR HUGE STOCK OF SCREWS.

PRICES PER **HALF-GROSS.**

ABBREV.: Heads. CH., Cheese. RH., Round. CS., Countersunk. NP., Nickel Plated. CP., Cadmium Pl. SC., Self-colour.

6BA	BRASS			STEEL	
¼" CH NP	1/6	¼" RH NP	1/5	¼" CH NP	1/-
¼"	1/7	¼"	1/6	¼" RH SC	1/-
¼"	1/7	⅜"	1/7	¼" CS CP	1/-
⅜"	1/9	⅜"	1/9	⅜" RH SC	1/2
⅜"	1/10	½"	1/11	½" CS CP	1/1
½"	1/11	½"	2/-	½"	1/2
⅝"	2/-	⅜" .. SC	2/1	⅜" RH SC	1/2
⅝" .. SC	1/11	1" .. NP	2/3	⅜" CS CP	1/4
⅜" .. NP	2/1	¼" CS SC	1/4	½"	1/5
½"	2/3	¼" .. NP	1/6	½" RH SC	1/5
1"	2/6	½"	1/7	1" CS CP	1/7
½" Inst H	1/9	⅝"	1/8	1" CH ..	1/9
⅝" .. NP	1/9	½"	1/9	1⅛"	2/6
1" CS ..	2/-	½"	1/10	1⅛" H H	2/9

4BA	BRASS			STEEL	
¼" CH SC	2/-	¼" RH NP	1/10	¼" CS CP	1/2
¼" .. NP	2/1	½"	2/3	⅜"	1/3
¼"	2/1	½"	2/9	⅜" RH ..	1/4
⅜"	2/2	⅜"	3/-	½" .. SC	1/2
⅜"	2/6	¼" CS ..	1/8	½"	1/4
½"	3/3	½"	2/-	½" CS CP	1/4
½" Hex H ..	2/6	½"	2/3	½" RH SC	1/6
½"	3/6	⅝"	1/10	⅝" .. CP	1/9

2BA	BRASS			STEEL	
⅛" RH NP	2/10	¼" CH NP	4/3	¼" H HSC	1/9
¼"	3/-	¼" .. SC	3/-	¼" LgeRH	2/-
¼"	3/3	½"	5/-	¼" RH SC	2/-
⅜" .. SC	3/3	1" RH ..	4/9	1" CH	2/6
⅜" .. NP	4/3	¼" CS NP	4/-	1¼" RH CP	2/9
⅜" Hex H SC	10/-	1⅛" .. SC	4/9	1" CS ..	2/-

8BA	BRASS			STEEL	
¼" CH NP	2/-	¼" CH SC	2/-	¼" CH CP	2/-
¼"	2/6	¼" RH NP	2/2	¼" CS ..	2/-
¼" CS ..	1/8	⅜"	2/6	¼" CH ..	2/2
¼" CH ..	2/3	⅜"	2/9	⅜" RH ..	2/2
¼" CS ..	1/9	⅜" Hex ..	2/9	½" CH NP	2/3
½"	2/6	½"	2/10	½" RH CP	2/3

ALL ABOVE POSTAGE EXTRA.

Manufacturers' enquiries invited, abundant stocks of most items

Large stocks of Copper and RESISTANCE WIRES; Paxolin type TUBING; Laminated Bakelite and Ebonite PANELS; TUFNOL and EBONITE TUBES and ROD; ERIE and DUBILIER RESISTORS; GERMANIUM and SILICON DIODES.

POST ORDERS ONLY PLEASE.

Send stamp for comprehensive lists. Trade supplied.

POST RADIO SUPPLIES
33, BOURNE GARDENS,
LONDON, E.4
Telephone: CLissold 4688 & 2021

The Connoisseurs Choice!

The BAKER 1953 12" TRIPLE CONE SPEAKER

- Fully Tropicalised
- Dust and Damp proof
- Even better Frequency response

COMPLETE ABSENCE OF BEAMING
APPROXIMATELY 180° RADIATION

Due to improved design a considerable reduction in beaming of the upper register has been achieved resulting in almost 180° radiation.

Read below the **AMAZING NEW** *Technical Specification of this World Famous Loud Speaker*

MODEL 53A

Type of diaphragm	"TRIPLE"
Diaphragm outer Suspension	Cloth
Effective cone diameter	9¼in.
Voice coil impedance (to order)	Standard 15 ohms
Fundamental resonance	(approx.) 35 c.p.s.
Frequency range	18/16,000 c.p.s.
Flux density	(approx.) 15,000 lines per sq. cm.
Maximum peak A.C. input (open baffle)	12 watts

BAKERS 'Selhurst' RADIO

Price on Application

NOTE : A special modification scheme has been inaugurated for all Triple Cone Speakers supplied since 1947. Please write for details.

This new and revolutionary High-Grade Loudspeaker now offers even greater reliability and performance to both the Export Market and the Home Consumer. Quite apart from its fine frequency response and natural reproduction, the new 1953 Model may be safely taken and used in any part of the world without fear of breakdown or loss of performance. We most cordially invite you to write without delay for a Descriptive Leaflet, or better still, call for a demonstration of both this Model and the other Speakers in our range.

★ *Wholesale Trade and Export enquiries Invited*

DEPT. PA9, 24, Dingwall Rd., CROYDON. Telephones: CROYDON 2271/2

Pioneer Manufacturers of Moving Coil Speakers since 1925

High Fidelity

RECORDING IN THE HOME

The new Baird Portable Tape Recorder incorporates the most up-to-date advances in high fidelity tape recording technique . . . twin track (speed 7½" per second) giving one hour's recording per reel . . . excellent response between 50 and 10,000 c.p.s. . . . single control operation of motors for recording, playback and rewind. In addition to the 45 secs. rewind, a manual "forward" device is provided. The whole unit, made with the same meticulous care that is given to all Baird instruments, is self-contained in a robust case with carrying handle. Write for leaflet giving further information.



Complete with microphone and tape
65 GNS.

BAIRD
PORTABLE TAPE RECORDER

BAIRD TELEVISION LANCELOT ROAD · WEMBLEY · MIDDLESEX

MAGNETA SECTIONAL
AMPLIFIER ASSEMBLIES

Sectional, unit construction enables a wide range of combinations of equipment to be assembled for radio, speech and gramophone amplification.
The basic audio amplifier provides an output of 50 or 100 watts, which can be added to as required to give higher outputs.

Please write for details to Dept. WW/M.2

MAGNETA TRADE MARK **TIME Co. Ltd.**
GOBLIN WORKS, LEATHERHEAD, SURREY.
Telephone: ASHTEAD 866 (8 lines)

ADVANTAGES OF THE 'ENGLISH ELECTRIC' METAL C.R. TUBE

TYPE T901

5. Wide Angle Scanning

The introduction of wide angle scanning has made it necessary to obtain an even higher degree of efficiency in scanning circuits. The requirements of scanning power for the 70° short tube and for higher E.H.T. voltage (14 kV) of which advantage can be taken, mark a considerable departure, as well as an advance in technique, from that necessary for earlier type tubes of 50° deflection angle using lower E.H.T. By using high Q coils, low loss Ferrite cores, and a "booster-damper" type of circuit, it is now possible to scan fully a 70° tube over the full screen area (Double D) at 14 kV. And it is worth noting that current consumption will be no greater than that required for a resistance-damped scanning circuit driving a narrow angle tube at low E.H.T. voltage. High efficiency components are now available for the home constructor, and full technical details concerning them and the scanning circuits may be obtained on application to the address below.



PRICE £24·6·5
Tax Paid

BRITISH MADE BY 'ENGLISH ELECTRIC'

For full technical details and scanning information write to:

THE ENGLISH ELECTRIC COMPANY LTD., TELEVISION DEPT., QUEENS HOUSE, KINGSWAY, LONDON, W.C.2

SIFAM
ENGLAND

Precision INSTRUMENTS
for the Laboratory

Portable
Pyrometer

A high-grade, 3½" scale moving coil instrument, robust, accurate and speedy in response. Normally supplied with 2 scales, 0-200°C and 0-400°C, and suitable couples. Also supplied with ranges up to 1,600°C for all standard thermo-couples.

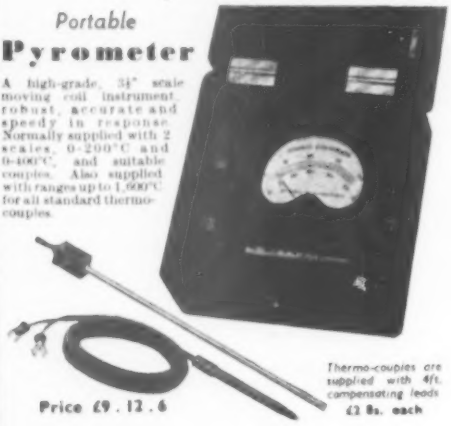

Thermo-couples are supplied with 4ft. compensating leads £2 8s. each

Price £9 . 12 . 6

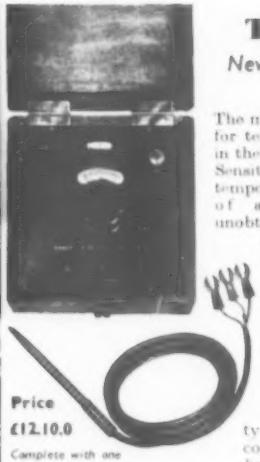

Thermaster
New Low Temperature Indicator

The most versatile instrument for temperature measurement in the range −80°C to +200°C. Sensitive to rapid changes of temperature, to a high degree of accuracy hitherto unobtainable in any other form of temperature indicator. Sections of 20 degrees or more between maximum and minimum of instrument range can be spread over the 8" scale. Self-contained dry battery. Unaffected by voltage change or length of leads (which can be as long as required). Pencil type detector for surface contact, immersion, air or liquids.

Price £12.10.0

Complete with one element and 4ft. leads

● *Write for Catalogue No. S/11 giving full details of complete SIFAM range.*

SIFAM ELECTRICAL INSTRUMENT CO. LTD.
LEIGH COURT TORQUAY Telephone: Torquay 4547-8

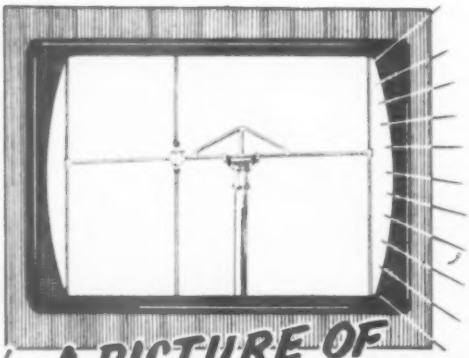

A PICTURE OF PERFECTION

and TELECRAFT TV Aerials are as good as they look. The famous FA22 of very robust construction for exposed sites is still supreme and is giving satisfaction to thousands of viewers in the fringe areas. Price **£5 : 17 : 6** will fit masts from 1¾" to 2½" in diameter.

Every day the demand for TELECRAFT products increases. More and more traders are recommending them for absolute reliability, selectivity and outstanding durability. We have a TELECRAFT type of aerial for *your* district responsive to the extreme fringe.

BETTER THAN ANY—CHEAPER THAN MOST

Contact your Dealer and insist on TELECRAFT LIMITED *Send for Descriptive Literature*

THORNTON HEATH, SURREY
Tel.: THOrnton Heath 1191-2-3

SCOTTISH SALES AND SERVICE DEPOT
423, Clarkson Road, Glasgow, S.4.
Merrylee 4326

Depots—B'HAM, BRISTOL, MANCHESTER, WORTHING, PLYMOUTH

What do you demand of a DIRECT RECORDING DISK No 1

Negligible Background Noise

A DYNAMIC RANGE GREATER THAN 60 db AT 78 R.P.M.

A disk is no better than its "finish." A true, flat, mirror-like surface tells at once of a blank carefully coated — to the experienced eye a disk giving promise of good performance. Yet the fulfilment of that promise depends upon something more than the eye can see. It depends upon a dozen characteristics of the coating material employed — its cutting qualities, to permit wide frequency range recording and reproduction; its ability to withstand long replay wear without impairing responses; its anti-static properties to facilitate swarf control, etc. But with all these features accepted the attainment of real quality performance is possible only if the background noise is of negligible proportions. That implies no ordinary lacquer coating but one specially formulated and as free from all foreign matter as modern science can make it. It implies one kind of coating only — the exclusively processed M.S.S. Cellulose-nitrate lacquer which is filtered, refiltered and then filtered again.

M.S.S. disks are available in four grades which cover every recording requirement. Write for details and full technical information.

THE MASTER SOUND SYSTEM

M.S.S. RECORDING CO. LIMITED, POYLE CLOSE, COLNBROOK, BUCKS
Colnbrook 284

BPL

ELECTRONIC FREQUENCY METER

MODEL FM 406A

Completely self-contained and designed to operate off A.C. mains, this instrument enables the direct measurement of very low frequencies and the entire audio frequency range. It is substantially independent of the applied voltage and wave form.

A six-way multiplier operating in conjunction with a 5-in. scale meter ensures good discrimination.

Its input circuit arrangement enables balanced or unbalanced sources to be measured.

For the comparison of two frequencies, they are fed into a mixer and the resultant difference frequency applied to this instrument, which will then directly indicate the numerical difference of the two frequencies.

SENSITIVE PANEL MOUNTING METERS

SIZE	2½"	3½"	5"
RANGE	25μA to 50A	15μA to 50A	15μA to 50A

Prices on application

Available for immediate delivery from our Stockists. M.R. Supplies, Ltd., 68 New Oxford Street, W.C.1, or write to :

FREQUENCY RANGES : From 0-100 c.p.s. to 0-5,000 c.p.s. or to order with a maximum range of 0-10 kc/s.

ACCURACY : 1% of f.s.d. may be adjusted to finer limits against external standard by means of pre-set control.

POWER SUPPLY : 200-250 volts or 100-120 volts. Power consumption 60 vA ; 40-60 cycles.

DIMENSIONS AND FINISH : 14" × 10" × 8". Weight 32 lbs. Front panel silver anodised aluminium, steel cabinet zinc plated and black crinkle finished.

BRITISH PHYSICAL LABORATORIES

HOUSEBOAT WORKS · RADLETT · HERTS · Telephone : RADlett 5674-5-6

FOR HIGH-FREQUENCY INSULATION

specify **'FREQUELEX'**

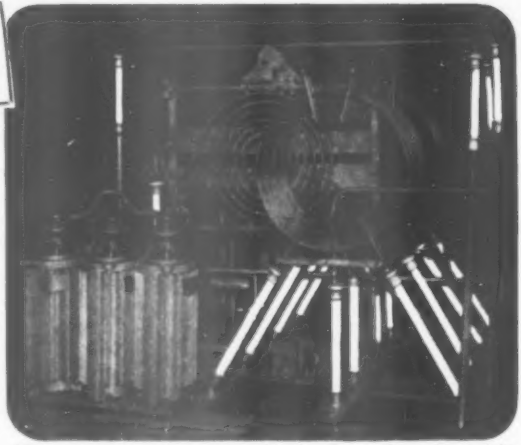

The Inductance shown is supported by our "FREQUELEX" Ceramic Rods and forms part of a 100 k.w. Radio Transmitter.

This is only one of many applications where Rods made to close limits are required.

We specialise in the manufacture of Ceramic Rods and Tubes of various sections in several classes of materials over wide dimensional ranges.

The Principal Materials Are :—

1. **Porcelain for general insulation.**
2. **Frequelex for High Frequency Insulation.**
3. **Permalex and Templex for Capacitors.**

The degree of accuracy depends on the size of the Rod or Tube, but the standard degree of accuracy is outlined in the Inter-Service Component Manufacturer's Council—Panel R Specification embodied in our Catalogue of Radio Frequency Ceramics, copy of which will be sent on request.

Large Rods up to 44" long and 1¼" square are used as supports for Tuning Coils, etc.

We shall be pleased to have your enquiries for all sizes of Tubes and Rods. Prompt deliveries can be given for most sizes.

Photograph by permission of The Marconi Wireless Telegraph Company Ltd., Chelmsford.

Bullers LOW LOSS CERAMICS

BULLERS LIMITED, 6 Laurence Pountney Hill, E.C.4. Phone : MANsion House 9971 (3 lines). Grams : 'Bullers, Cannon, London'

81 2D

PROGRESS

in Counting ~

through the ages

HISTORICAL ILLUSTRATIONS BY COURTESY OF THE SCIENCE MUSEUM LONDON

NAPIER'S BONES

Devised in 1617 by John Napier, a Scottish nobleman, as a mechanical means of multiplication by addition.

ROMAN ABACUS

Known to have been in use at the time of Julius Caesar. A surviving specimen is preserved in La Bibliothèque Nationale, Paris.

Cold Cathode Tubes

FOR

Modern

COUNTING · CALCULATING
SELECTING · SWITCHING

LEIBNITZ'S STEPPED RECKONER

Invented in 1694 by the German philosopher and incorporated in the earliest practicable calculating machines

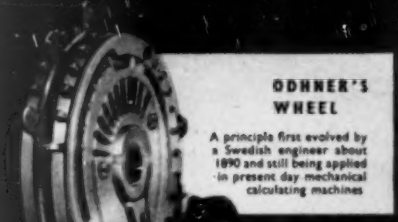

ODHNER'S WHEEL

A principle first evolved by a Swedish engineer about 1890 and still being applied in present day mechanical calculating machines

HIVAC COLD CATHODE TUBES

The most modern devices for use in electronic systems.

Hivac Limited

GREENHILL CRESCENT, HARROW-ON-THE-HILL
MIDDLESEX, ENGLAND

Phone: HARrow 2655 *Cables: Hivac, Harrow*

HIVAC Cold Cathode Tubes—Miniature and Subminiature Valves—Electrometer Valves—Neon Indicator Lamps—Telephone Switchboard Lamps—are used by the world's leading manufacturers.

DOUGLAS AVO MACADIE

Automatic

COIL WINDERS

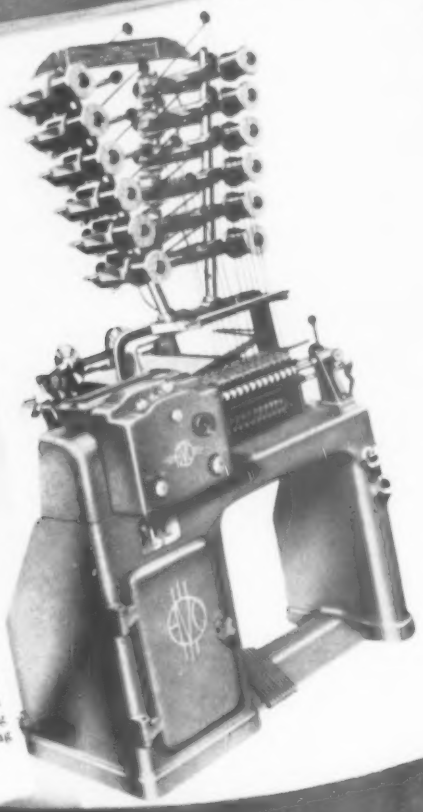

This typical page from our latest Catalogue shows the "Douglas" Fully Automatic Multi-Winder, designed for the high speed production of large quantities of coils with or without paper interleaving.

Our standard range includes 27 different Machines, and we make a number of other types designed for special purposes. Long experience in the design and manufacture of Coil Winders invests our machines with an unexcelled standard of efficiency and ensures maximum economy in the production of windings for every industrial requirement.

Our complete Catalogue will be sent to interested executives on application, and our specialist designers will be pleased to assist in rendering advice on any particular coil winding problems.

OVERSEAS AGENTS
We have Agents in all parts of the world. Names and addresses will be furnished on application.

THE AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT CO. LTD.

WINDER HOUSE DOUGLAS STREET LONDON SW.1 *Telephone:* VICtoria 3404—9

MARCONI communication systems

serve mankind

The jungle is no longer the barrier which for so many centuries hampered the progress of communications. Guglielmo Marconi's invention of wireless overcame this obstacle just as it overcame the ocean and the desert. The Company which he founded is still exploring, in the same exacting way, new ideas and techniques for bringing communications more fully into the service of mankind.

SURVEYED

PLANNED

INSTALLED

MARCONI'S WIRELESS TELEGRAPH COMPANY LTD · CHELMSFORD · ESSEX

G.E.C. RADIO COMMUNICATION EQUIPMENT
FOR USE IN ALL PARTS OF THE WORLD

The G.E.C. with its unique research organization has always been in the forefront of radio development, and its enormous manufacturing resources have enabled these developments to be put into production. Where line telephony and telegraphy communications come up against geographical barriers, and where speed, security and mobility are important, the Company's specialists are freely available for consultation.

FOR EXAMPLE THE GENERAL PURPOSE COMMUNICATION RECEIVER BRT.400 is built to meet the most exacting requirements of commercial service in all parts of the world, for high grade telegraphy service and quality reception for re-broadcast.

G.E.C. RADIO COMMUNICATION EQUIPMENT

THE GENERAL ELECTRIC COMPANY LIMITED OF ENGLAND — MAGNET HOUSE, KINGSWAY, LONDON

Acclaimed by the TECHNICAL PRESS

Transient response . . . one does not need to wait for loud and dramatic passages in the music to demonstrate this. It is there all the time, in the bowing attack of strings in pianissimo passages and in other subtle ways that will be appreciated by those that have ears to hear.

Wireless World (review) Jan. 1950

Tested on records known to have excellent transient response the reproduction was the most natural I have so far encountered.

The Gramophone (review) Jan. 1950

£35

The reproduction from records was a revelation in smoothness.

I. Moir, FMTV (review) Oct. 1951. U.S. publication

One of the Fairs' more striking demonstrations was the playing of a recording of breaking glass in which the Acoustical speaker and amplifier combined to produce an illusion of reality so complete that listeners figuratively searched for Band-Aids to repair split fingers.

Audio Engineering (review of 1951 Audio Convention in New York).

The above passages dealing with transients are taken from reviews of Q.U.A.D. amplifier and Corner Ribbon demonstrations which have appeared in various technical publications.

Why is it that Acoustical Reproduction of Transients is so far in advance of any other equipment commercially available?

The most important criterion for good transients is that the complete chain of equipment should be aperiodic—there must be a minimum of *sharp* changes in the frequency characteristic since such changes are invariably associated with resonance.

The obvious and usual procedure is to produce a loudspeaker designed for—and sold on—its ability to give a good account of itself from average modern recordings and radio transmissions. Such a loudspeaker may be good—may be a little too good on below average programmes—may not be good enough on the best.

We prefer to use a very light treble diaphragm (0.02 grm) completely aperiodic and to control the limits electronically because of the obviously better and smoother control which can be obtained.

In the Q.U.A.D. we control the final slope *and rate of change of slope* so that this rate of change need *never* be sharper than is necessary for the programme being reproduced.

ACOUSTICAL MANUFACTURING CO LTD

HUNTINGDON · HUNTS · TEL: 361

Send for an illustrated Booklet

WHAT DO YOU LOOK FOR IN **TAPE RECORDING EQUIPMENT?**

HERE ARE THE POINTS THAT REALLY COUNT!

1. Fast rewind and forward run—essential for easy cueing.
2. Three motors to obviate use of friction drives so often the cause of "wow" and "flutter".
3. High grade Record/Play Back Head with mu-metal laminations and accurate gap to make possible a frequency response of 50 c.p.s. to 10,000 c.p.s. at 7½"/sec. with a good amplifier.
4. Twin track heads to cut tape costs in half and double recording time per reel.
5. Electro-Magnetic Erase Head for low tape noise and to enable one track to be erased without affecting the other when two recordings are made on a single tape.

ONLY THE *GENUINE*

LANE TAPE TABLE

(Model 2A — *Patent Applied For*)

OFFERS *ALL* THESE FEATURES

at the Low Price of

£16.10.0

Write for Leaflet. Trade Enquiries Invited.

VERDIK SALES LTD.

17, Shaftesbury Avenue, London, W.1.

Phone: GERrard 8266

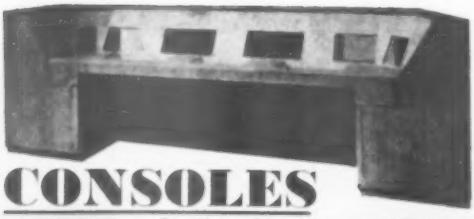

CONSOLES

For Major Film Mixer Suites to Individual requirements

"VIEWMASTER" CONSOLES

AS SHOWN

Beautifully designed and finished in Walnut, Oak, Mahogany and Teak, to customers' requirements.

Standard "VIEWMASTER" model as shown **£13.0.0**
With Full Length Doors **£14.0.0**
Universal Model for all 16" tubes now in preparation.
Carriage and Packing **15/- extra.**

Fitted with shelf for easy mounting. These are **NOT** mass produced and dimensions can be altered to suit personal requirements.

Individual and Trade Enquiries to:

H. ASHDOWN

CABINET MAKER

98 HERTFORD ROAD, EDMONTON, N.9

Phone: TOT. 2621

DESIGNED for the DESIGNER

WINKLER



PRECISION MULTI-WAY SWITCHES

The range of Winkler Precision Multi-way Switches fulfills the requirements of the instrument designer for a high grade component consistent with the quality demanded of present-day instruments and electronic equipment.

Up to 25 contacts, 1 to 3 pole, 1 to 6 banks, ¼ amp. 80 VA. per contact.

Write also for details of WINKLER KEY SWITCHES

Sole Concessionnaire:

G. A. STANLEY PALMER

A. R. Ae. S.

Maxwell House, Arundel Street, LONDON, W.C.2.

Phone: TEMple Bar 1610

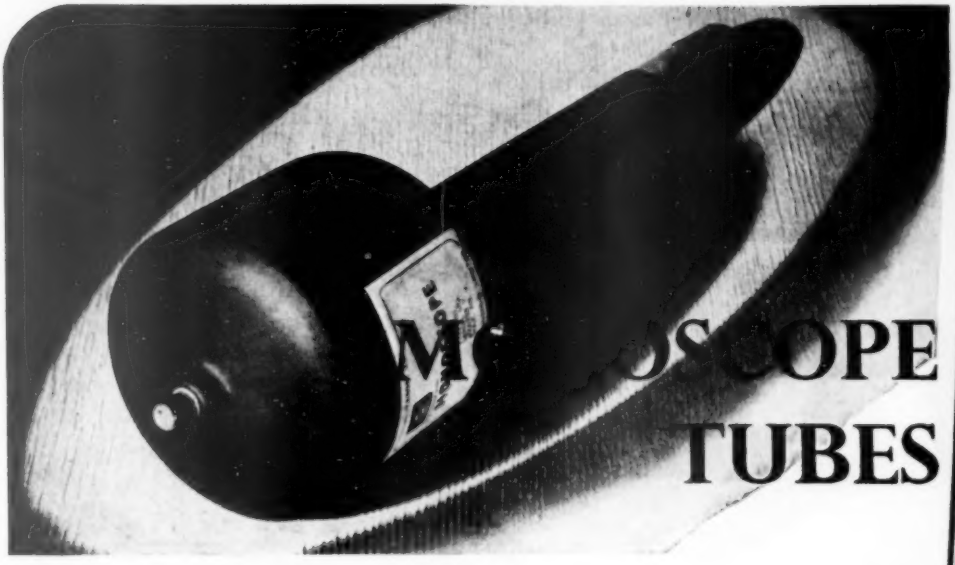

MONOSCOPE TUBES

THE Monoscope is basically a simple caption scanner apparatus capable of providing a video signal derived from a fixed pattern within the tube.

Almost any pattern comprising pure line, halftones or a combination of both can be supplied on receipt of specific requirements, and two standard types are available.

Type J.101 — Test Chart "A"
Type J.201/X1 — Test Chart "C"

TYPICAL OPERATING DATA

Deflection	*electromagnetic*
Focus	*electrostatic*
Vh	6·3 *V*
Vg (cut-off)	−50 *V*
Va1	1200 *V*
Va2 (focus)	800/850 *V*
Va3 (wall)	1200 *V*
V target	1160/1200 *V*
I target	5μ*A*

Resolution better than 500 lines
Video Signal 0.5μA peak to peak (min)

CINEMA-TELEVISION LIMITED

A Company within the J. Arthur Rank Organisation

WORSLEY BRIDGE ROAD · LONDON · SE26

Telephone: HITher Green 4600

SALES AND SERVICING AGENTS

F. C. Robinson & Partners Ltd., 287 Deansgate, Manchester, 3
Hawnt & Co., Ltd., 59 Moor St., Birmingham, 4
Atkins, Robertson & Whiteford Ltd., 100 Torrisdale Street, Glasgow, S.2

CINTEL

REGISTERED TRADE MARK

WE DESIGN AND MAKE ELECTRONIC INSTRUMENT HOUSINGS

We are the leading independent manufacturers of cabinets for all types of electronic equipment. We specialize in prototypes and bulk production and also manufacture a comprehensive range of standard cases and racks, available from stock. Write for illustrated catalogue to

IMHOF'S

ALFRED IMHOF LTD., 112-116 New Oxford Street, London, W.C.1
Telephone : MUSEUM 7878

Bowjection

LARGE SCREEN TELEVISION 4ft by 3ft

Provides a Picture of the Highest Quality and is Eminently Suitable for use in Schools, Hospitals, Clubs, Institutions Etc.

Those Interested are Invited to send for Illustrated Leaflet.

Demonstrations can be arranged.

PROJECTOR £175
SPECIAL SCREEN £25

Designed & Manufactured by —

Rainbow Radio Mfg. Co. Ltd.,
Mincing Lane, Blackburn.
Grams:— Rainbow Telephone:— 4388

The "RD JUNIOR" PRE-AMPLIFIER
(Incorporating Low-pass Filter)

An entirely new design with a high performance and wide range of application. Primarily intended for use with the new "Junior" amplifier and the "Baby" amplifier, it may be used with the latter without modification.

MAIN FEATURES

★ High input sensitivity. MIC 8 m.V P.U. 40-60 m.V.
★ 5-way input selector giving accurate compensation for British, American and Long Playing records.
★ Wide range switched bass and treble controls.
★ A low pass filter operating at 7 Kc/s and giving 40 DB per octave attenuation.
★ Bass lift response ideally suited to low level listening requirements.

PRICES

Pre-amplifier complete with engraved panel	£8 10 0
"RD Junior de-Luxe" amplifier and new pre-amplifier	£28 10 0
"RD Baby de-Luxe" amplifier and new pre-amplifier	£21 0 0

Full specification post free on request.

ROGERS DEVELOPMENTS CO

"Rodeveo House," 116 Blackheath Road, Greenwich, S.E.10. Telephone: TIDeway 1723

Ceramic Switches by

A.B. Metal Products are proud to announce that their famous H Type range of Switches is now available with "CERAMIC" insulation.

Stators and Rotors are manufactured in best quality electrical Porcelain, giving the highest degree of insulation, together with first-class Radio frequency Characteristics.

FULLY INTER-SERVICE TYPE APPROVED TO R.C.L. 151.12.

Early deliveries can be quoted, and we invite your enquiries.

Write for illustrated brochure :—

Metal Products Ltd

16 BERKELEY STREET, LONDON, W.1

'Phone : Grosvenor 5206/7

RADIO TRADERS LTD.

23 WARDOUR STREET
(Covenery Street end)

Phone GERrard 3977/8 LONDON, W.1 Grams "Radiotrade"

WHOLESALE, MANUFACTURERS' AND EXPORT ENQUIRIES ONLY

CINCH COMPONENTS
Stockists of all CINCH COMPONENTS

HUGE STOCKS
of Ex-Govt. CARBON BRUSHES

RESISTORS
HIGH STABILITY, close tolerances from 1% ¼, ½, 1 and 2 watts. All values up to 2 meg., including 8, 13 and 30 meg.
VITREOUS WIREWOUND. Large selection from 2 to 200 watts.
CARBON. ¼ watt to 5 watt. All popular values. Standard Car Suppressors, 15,000 ohms.

CAPACITORS
Block Paper, Silvered Mica, Mica, Tubular and Ceramic.

SWITCHES
TOGGLE, YAXLEY, OAK, ETC.

EPICYCLIC DRIVES
Large selection of instrument and radio knobs.

INDICATOR LAMP HOLDERS
Red, Green and Clear.

LAMINATIONS
RADIOMETAL 31, 39 and 40. Also many other types.

VOLUME CONTROLS
MORGANITE "H" type, "LH" type, "M" type and WIRE WOUND. Most values and popular makes in stock.

PLUGS AND SOCKETS
CINCH, PYE, JONES, BELLING & LEE, BULGIN, ETC.

TRIMMERS
Variable CERAMIC TRIMMERS. Capacities from 5 to 100 pf. Spindle and pre-set types. Also Philips trimmers and trimmer tools and many other types.

WIRES
ENAMELLED, SILK COVERED, REGENERATED CELLULOSE and PUSH-BACK. Screened, Standard and P.V.C.

VALVE HOLDERS
Paxolin, Moulded and Ceramic. Large selection including all latest types.

NUTS, BOLTS, WASHERS, P.K. SCREWS, RIVETS, EYELETS, SOLDER TAGS, GROMMETS, GLASS CARTRIDGE FUSES, BRASS TERMINALS, VARNISHED COTTON AND PLASTIC SLEEVING—various colours ½ mm.—30 mm., ETC.

Many other lines, including ex-government components, in stock. All enquiries dealt with individually, but regret no lists are issued.

TRADE COUNTER OPEN 9.30 to 5.30 MONDAY TO FRIDAY. CALLERS WELCOMED.

IMMEDIATE DELIVERY
From
OUR LARGE STOCKS
PROMPT ATTENTION

HIGH GRADE LABORATORY EQUIPMENT
REBUILT AND GUARANTEED AS NEW

SIGNAL GENERATOR TYPE 390G

WE HAVE A COMPREHENSIVE RANGE OF ELECTRONIC EQUIPMENT BY WELL-KNOWN MAKERS, INCLUDING SIGNAL GENERATORS COVERING THE "S" BAND (10 cm). A SMALL SELECTION OF OTHER EQUIPMENT IS SHOWN BELOW :—

Double Beam Oscilloscopes Type 339A		Signal Generator Type TF.144G	
Oscilloscopes by Dumont Type 208		" " " TF.517F	
" " " Type 224A		" " " TF.390G	
" " " Type 241		Sullivan Precision R.F.O's.	
Murphy Pattern Generator Type TPG.11			

For further particulars of this and other high-grade electronic instruments, write to :—

HATFIELD INSTRUMENTS
175 UXBRIDGE RD., HANWELL, LONDON, W.7
Telephone : EALING 0779

EXPORT AND TRADE ENQUIRIES INVITED

Type A1 record and replay amplifier with Power Pack Oscillator £60. 0. 0

Type C1 record and replay amplifier 6 watts push pull output with Power Pack Oscillator £63. 0. 0

Type E tape record/playback amplifier with Power Pack Oscillator for 2 head tape desks £36. 0. 0

Bradmaster type 5 Tape Desk with 6 RP Heads £42. 0. 0

C. J. R. Oscillator Coils. Type 1B Oscillator 9s. 0d.

C. J. R. Oscillator Coils. Type 1B Plate 9s. 0d.

C. J. R. Bias Rejector Units 12s. 6d.

Tape Recorder. Type D1
The model D1 consists of a High Quality recording amplifier — replay amplifier and Power Pack Oscillator mounted with a high quality Tape Desk into a Rexine covered case, complete with low impedance desk type moving coil microphone, mains lead, microphone lead, reel of 3 mm x magnetic tape and spare reel. 3 watts output **with full monitoring facilities.** Programme level meter and external speaker socket with selection of three impedances. Leaflets describing the above Recorder sent on request.
Type D1 Tape Recorder **£119.15.0**
Type D1 Tape Record/Replay amplifier, specification as above with Power Pack Oscillator (as separate units) £51. 5. 0
Rexine Case £9. 10. 0

C.J.R. ELECTRICAL & ELECTRONIC DEVELOPMENT LIMITED
BICKFORD RD · WITTON · BIRMINGHAM · 6

new

METALLISED CERAMICS FOR HERMETIC SEALS

Steatite & Porcelain Products present an outstanding advance in the technique of metallising ceramics; they can now offer ceramic bushes for hermetically sealed components free from all shortcomings common to earlier types of metallising

There are five important advantages of the new process:

1. The new metallising is robust and highly resistant to solution in any soft solder alloys.
2. Any method of soldering may be used, without precautions of controlled temperature and soldering time; no special skill in soldering is necessary for consistent results.
3. The new metallised ceramics may be repeatedly mounted and demounted: they may be removed from faulty or broken-down components and used again.
4. High melting-point soft-solders (such as silver-lead) may be used in assembly of these new metallised ceramics. Thus, all risk is eliminated of failure of the hermetic sealing during component assembly into equipment.
5. No gas or oil leakage can occur—the bond between the new metallising and the ceramic is stronger than the ceramic itself.

SEND FOR FULL DETAILS

The new metallising is applied to all the hermetic seals of the standard range (shown in catalogue No. 25, available on request). Special types, including multi-seals, can readily be produced to customer's requirements. Please write to us for further details. We shall be glad to answer any queries on the new metallised ceramics.

STEATITE & PORCELAIN PRODUCTS LTD

STOURPORT-ON-SEVERN WORCESTERSHIRE TEL: STOURPORT 111 GRAMS: STEATAIN STOURPORT

SP79

G.E.C. SELENIUM RECTIFIERS

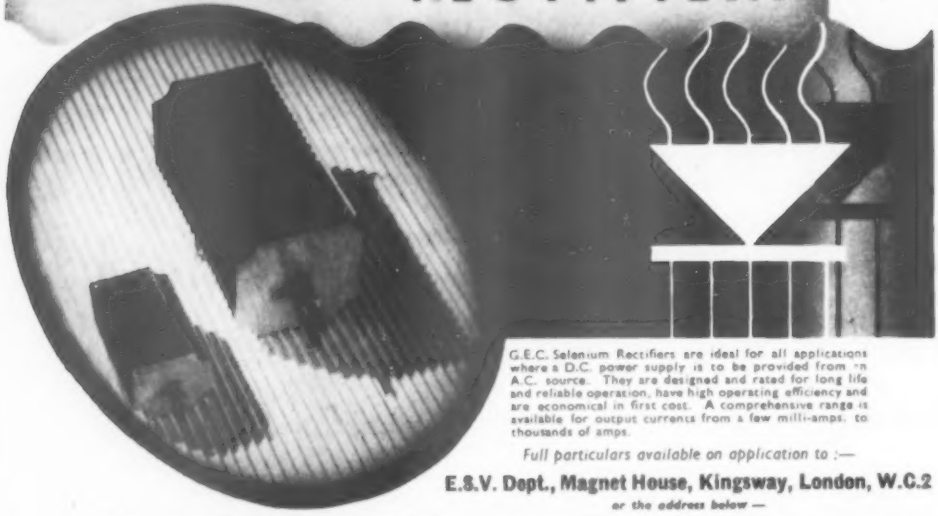

G.E.C. Selenium Rectifiers are ideal for all applications where a D.C. power supply is to be provided from an A.C. source. They are designed and rated for long life and reliable operation, have high operating efficiency and are economical in first cost. A comprehensive range is available for output currents from a few milli-amps. to thousands of amps.

Full particulars available on application to :—

E.S.V. Dept., Magnet House, Kingsway, London, W.C.2

or the address below —

SALFORD ELECTRICAL INSTRUMENTS LTD · SALFORD 3 · LANCS

A SUBSIDIARY OF THE GENERAL ELECTRIC CO. LTD. OF ENGLAND

Widney Telescopic Mountings

PRODUCED IN 3 SIZES



Telescopic Mountings offer the most convenient means of obtaining complete accessibility of rack mounted equipment as each chassis can be withdrawn completely clear of its framework for easy examination. Write for illustrated catalogue.

Owing to the limited supply of raw material, we regret that we cannot supply private individuals.

TECHNICAL SALES OFFICE
290 NEW KING'S RD.
LONDON, S.W.6
Tel.: RENown 1601

A Widney PRODUCT
ESTABLISHED 1898

MANUFACTURERS
HALLAM SLEIGH & CHESTON LTD
WIDNEY WORKS · BIRMINGHAM 4

EXPORTING SIMPLIFIED

Exporting procedure can be a headache to the manufacturer wishing to sell to overseas markets. That is where we come in. Shipping and forwarding has become a highly developed side of our business during the last four years. We can relieve manufacturers of all the paperwork and formalities necessary for the efficient forwarding of electrical and electronic goods to foreign buyers. We can pack them, too, if required. Not only that, but our wide connection overseas may enable us to bring you export orders. Let us discuss the help we could be to you.

N. MIERS
& CO. LTD.

115 Gower Street, London, W.C.1

'Phone : EUSton 7515. 'Grams : Miersco, Westcent

aural perfection!

WE have pleasure in announcing the creation of a new range of Loudspeakers, embodying many new features. These speakers are the product of intensive development in design and production technique, and set a new standard for the Radio and Television Industry.

Each model is magnetically screened, of dustproof design, and will withstand severe climatic conditions.

Our specialised knowledge of diaphragm manufacture coupled with a new approach to the magnetic design makes this an outstanding range for all applications.

Models are available in each of the recognised diameters, and can be supplied fitted with transformers.

We can meet specific requirements for all industrial applications.

STANDARD TYPE C6104

Diameter 6½in.

Flux density, 10,000 lines per sq. cm.

Peak power handling capacity (speech and music), 4 watts.

Speech coil impedance, 3 ohms at 400 cycles.

Frequency response according to specification.

Other models are available in this diameter, with alternative values of flux density and power handling capacity.

LECTRONA LOUDSPEAKERS

Designed and Manufactured by

ACOUSTIC PRODUCTS LIMITED

STONEFIELD WAY, VICTORIA ROAD, S. RUISLIP, MIDDX. Phone: Ruislip 6093/4

SALES: **EDSTONE LIMITED**

15 BUCKINGHAM PALACE GARDENS, LONDON, S.W.1. Phone: Sloane 0621

MAINS TRANSFORMERS

FULLY INTERLEAVED
SCREENED AND IMPREGNATED. ALL GUARANTEED.
ALL PRIMARIES ARE 200/250 v. Half Shrouded.

HSM61. (Midget). Output 250-0-250 v. 60m.a., 6.3 v. at 3 amps., 5 v. at 2 amps. 18/-
HS61. Output 250-0-250 v. 60 m.a., 6.3 v. at 3 amps., 5 v. at 2 amps. 18/6
HS60. Windings as above. 4 v. at 4 amps., 4 v. at 2 amps. Output 18/6
HS2. 250-0-250 v. 80 m.a. 21/-
HS3. 350-0-350 v. 80 m.a. **HS30.** 300-0-300 v. 80 m.a. 21/-
HS2X. 250-0-250 v. 100 m.a. **HS75.** 275-0-275 v. 100 m.a. 23/-
HS30X. 300-0-300 v. 100 m.a. **HS3X.** 350-0-350 v. 100 m.a. 23/-

Fully Shrouded

FSM61. (Midget). Output 250-0-250 v. 60 m.a., 6.3 v. at 3 amps., 5 v. at 2 amps. Output 18/6
FS2. 250-0-250 v. 80 m.a. 23/-
FS30. 300-0-300 v. 80 m.a. **FS3.** 350-0-350 v. 80 m.a. 23/-
FS2X. 250-0-250 v. 100 m.a. **FS75.** 275-0-275 v. 100 m.a. 25/9
FS30X. 300-0-300 v. 100 m.a. **FS3X.** 350-0-350 v. 100 m.a. 25/9
All the above have 6.3 4-0 v. at 4 amps., 5-4-0 v. at 2 amps.
FS43. Output 425-0-425 v. 200 m.a., 6.3 v. 4 amps., C.T. 6.3 v. 4 amps., C.T. 5 v. 3 amps. Fully shrouded. 51/-
FS40. Output 450-0-450 v. 250 m.a., 6.3 v. 2 amps., C.T. 6.3. v 4 amps., C.T. 5 v. 3 amps. Fully shrouded. 75/-
FS30X. Output 300-0-300 v. 80 m.a., 6.3 v. 7 amps., 5 v. 2 amps. Framed. Flying leads. 31/9
FS35X. Output 350-0-350 v. 250 m.a., 6.3 v. 6 amps., 4 v. 8 amps., 4 v. 3 amps., 0-2-6.3 v. 2 amps. Fully shrouded. 71/6
PS160X. Output, 350-0-350 v. 160 m.a., 6.3 v. 6 amps., 6.3 v. 3 amps., 5 v. 3 amps. Fully shrouded. 47/6
FS43X. Output, 425-0-425 v. 250 m.a., 6.3 v. 6 amps., 6.3 v. 6 amps., 6 v. 3 amps. Fully shrouded. 69/-
MS6. Output, 250-0-250 v., 100 m.a., 6.3 v. 6 amps. C.T. 5 v. 3 amps. For receiver R1355. Half shrouded 29/3
MS150. Output, 350-0-350 v. 150 m/a., 6.3 v. 3 amps., C.T. 5 v. 3 amps. Half shrouded 30/9
FS6. Output, 250-0-250 v. 100 m/a., 6.3 v. 6 amps., C.T. 5 v. 3 amps. Fully shrouded. 32/6
PS120. Output, 350-0-350 v. 120 m/a., 6.3 v. 2 amps., C.T. 6.3 v 2 amps., C.T. 5 v. 3 amps. Fully shrouded 33/-
PS256. Output, 250-0-250 v. 80 m.a., 6.3 v. at 6 amps., 5 v. at 3 amps. Fully shrouded. 30/9
PR1/1. Output 230 v. at 30 m/a., 6.3 v. at 1.5 2 amps. 23/-
PS150. 350-0-350 v. 150 m/a., 6.3 v. 4 amps., 5 v. 3 amps. 34/9
PS150X. Output, 350-0-350 v. at 150 m/a., 6.3 v. at 2 amps., C.T. 6.3 v. at 2 amps., C.T. 5 v. at 3 amps. Fully shrouded 34/9
The above have inputs of 200/250 v.

FILAMENT TRANSFORMERS

P4. Output, 4 v. 2 amps. **P6.** Output, 6.3 v. 2 amps. 9/-
P12X. Output 12 v. at 1 amp., 9/-, **F6X.** Output, 6.3 v. 0.3 amps 6/-
P12. Output, 12.6 v. tapped 6.3 v. at 3 amps. 18/6
P24. Output, 24 v. tapped 12 v. at 3 amps. 26/-
F12 and F24 framed with Flying Leads.
PU6. Output, 0-2-4-5-6.3 v. at 2 amps. 11/-
F29. Output, 0-2-4-5-6.3 v. at 4 amps. 20/9
FU6 and F29 clamped with Flying Leads.
F5. Output, 6.3 v. at 10 amps., or 5 v. at 10 amps. or 12.6 v. at 5 amps or 10 v. at 5 amps. 37/9
P6.4. Output, four at 6.3 v. tapped at 5 v. at 5 amps. per winding giving by suitable series and parallel connections 24 v. at 5 amps., 20 v. at 5 amps., 18 v. at 5 amps., 15 v. at 5 amps., 12.6 v. at 10 amps., 10 v. at 10 amps., 6.3 v. at 20 amps., 5 v. at 20 amps. 57/-
F5 and F6.4 framed with Flying Leads
PU12. Output 0-4-6.3 v. 3 amps. **FU24.** Output 0-12-24 v. 1 amp. 19/6
The above have inputs of 200/250 v.

OUTPUT TRANSFORMERS

MOP1. Ratios, 26, 46, 56, 66, 90, 120-1 50 m.a. max current. C.T. for Q.P.P. Class B, etc. Secondary 2/4 ohms. Top panel and clamped, each 6/-
OP1. Midget Power Pentode, ratios 30, 60, 90-1, 40 m/a. Secondary 2/3 ohms, each 4/-
OP2. Midget Pentode, ratios 45-1, Secondary 2/3 ohms, 40 m/a., per doz. 39/6
OP10. 10/15 watts output. 20 ratios on Full and Half primary 19/9
OP30. 30 watts output, 20 ratios on Full and Half primary. 28/6
Williamson's O.P. Transformer to Author's specification £4 13/6
Chokes for Williamson's Amplifier. 30H. at 20 m/a. 18/6
10H at 150 m/a. 35/6
Choke C4. 60 m.a., approx. 8H, 350 ohms 5/-
Choke C5. 40 m/a., approx. 5H., 350 ohms 5/-
Choke C6. 50 m.a., 50H., 1,500 ohms 22/-
C8. 360 Micro henries clamped, **C 3. C7.** 90 m a 180 ohms, clamped 6/3
Belling-Lee Co-Axial Plugs. Type 642/P., each 1/3
Belling-Lee Co-Axial Sockets. Type 604/S, each 1/3

Quotations, etc.—stamped addressed envelope please.
C.W.O. (add 1/3 in £ for carriage).
Trade and also Export enquiries invited.

H. ASHWORTH (Dept. WW)
676, Gt. Horton Road, Bradford, Yorks.

BRADMATIC

MAGNETIC TAPE RECORDING EQUIPMENT

Bradmaster Model 5 Tape Desk

- Built to professional standards.
- Two speeds—3¾ and 7½ inches per second.
- Easily adjusted for single or twin track recordings.
- Fast wind and rewind—full reel rewound in 1½ minutes.
- Heavy alloy flywheel. Freedom from "wow" and "flutter."
- Double servo brakes on each hub.
- Push Button control.
- Three heavy duty motors.
- Three shielded Bradmatic heads.
- Size: 13½in. x 15½in. x 6½in. deep.

Price **£41** (fitted with 5 R.P. heads)
or with 6 R.P. heads **£42**

A recorded frequency range of 50-11,000 c.p.s. at 7½ inches per second can be obtained by using a Model 5 Tape Desk with a type A1 recording amplifier utilising a Williamson or similar high quality main amplifier for playback.

Portable Recorders

In rexine covered case, fitted with model 5 Tape Desk (6RP heads) and C.J.R. type D.1 amplifier with monitoring. Provision for external loudspeaker. Complete with microphone and leads.

Price **£119.15.0**

High Fidelity Sound Heads. Type 5RP (record/play), £3/5/-. Type 5E (erase), £3/5/-. Type 6RP (Super Fidelity), £3/15/-. Oscillator Coils, Screening Cans, E.M.I. Scotch Boy and G.E.C. tape, amplifiers and microphones.

Trade supplied *Send for Lists.*

BRADMATIC LIMITED
STATION RD. · ASTON · BIRMINGHAM 6
Phone: EAST 0574 *Grams: Bradmatic, Birmingham*

ADCOLA
(Regd. Trade Mark)

SOLDERING INSTRUMENTS

SHIELDS AS ILLUSTRATED CAN BE SUPPLIED WHEN AVAILABLE.

SOUND Joints
For
SOUND Equipment

Any volt range supplied
6/7 to 230/250

- 1/4" dia. bit Standard Model
- 1/8" dia bit, Standard Model
- 1/4" Detachable Bit Type (Factory Bench Line)
- Equally suited to daily or intermittent use
- Heating time: 90 seconds
- Consumption: 25 watts
- Weight: 4 ozs.
- Total length of instruments: 9 inches
- Handle remains cool during operation.

Made in England

Registered Design (British, U.S.A., Foreign Patents)

Export Enquiries Invited.

Apply Sole Manufacturers and Suppliers

ADCOLA PRODUCTS LTD.
Sales, Offices & Works: CRANMER COURT, CLAPHAM HIGH ST., LONDON, S.W.4. *MACaulay 4272*

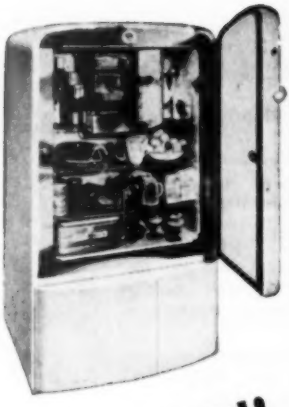

How are YOU fixed!

56 Spire Speed Nuts are used in the assembly of the Kelvinator Refrigerator. These have reduced production and assembly costs considerably because Spire Speed Nuts make assembly easier and faster. Saving has not been achieved at the expense of performance, however. Quite the contrary is the case. These self-locking fasteners are functionally better than the old methods they replace. And — a very great advantage — each fastener saves 50/75% on weight of materials used.

21 SNO Spire Speed Nuts secure inner liner.

2 SNO Spire Speed Latches secure lower access panel in closed position.

9 SNJ Spire Speed Nuts used to fasten inner cover plate and to secure thermostat.

4 SFP Spire Speed Fixes retain evaporator support in position.

15 SNR Spire Speed Nuts hold shelf supports.

5 SFP Spire Speed Fixes used to secure Kelvinator emblem and to attach outer nameplate.

Spire **SPEED NUTS** *fastest things in fastenings*

Enquiries to:
SIMMONDS AEROCESSORIES LTD., Byron House, 7-8-9 St. James's Street, London, S.W.1
Head Office & Works: Treforest, Glamorgan. Also, Birmingham, Stockholm & Melbourne.
CBC245

TANNOY

TANNOY ANNOUNCES . . .

still further improvements to this already famous loudspeaker, which is so often the first choice of Broadcasting Authorities, leading recording Companies, Government Research and Development Organisations, and by the producers of high fidelity sound apparatus throughout the world.
We should be pleased to send full details upon application.

TANNOY PRODUCTS LTD.
WEST NORWOOD, S.E.27.
Telegrams & Telephones GIPsy Hill 1131
(6 lines)

CAST FRAME
ACCURATE AND PERMANENT LOCATION OF LF AND HF MAGNET GAP ASSURED
SELF-CENTRING HF DIAPHRAGM AND COIL ASSEMBLY
REAR LF SUSPENSION DUSTPROOF
4 NEW STAR POINTS

DUAL CONCENTRIC

Let ICS perfect YOUR knowledge of radio and T/V

THOSE who wish to supplement their existing knowledge with a sound technological background and, if necessary, pass qualifying examinations can do so by means of I.C.S. Home Study Courses. These include **RADIO ENGINEERING . RADIO SERVICE ENGINEERING . RADAR . ELEMENTARY ELECTRONICS . ADVANCED SHORT WAVE RADIO . RADIO . T.V TECHNOLOGY** and training for the following examinations—**B.I.R.E. . P.M.G. CERTIFICATES FOR WIRELESS OPERATORS . C. & G. TELECOMMUNICATIONS C. & G. RADIO SERVICING CERT. (R.T.E.B.) . C. & G. RADIO AMATEURS . etc., etc.**

Students are coached until successful. Fees are moderate and include all books required.

GENEROUS DISCOUNT TO H.M. FORCES

WRITE TODAY for FREE BOOKLET describing complete facilities for the successful study of Radio and T.V technology.

INTERNATIONAL CORRESPONDENCE SCHOOLS LTD.
Dept. 233B, International Bldgs., Kingsway, London, W.C.2

Please send booklet on subject .....

Name ..... Age .....
(BLOCK LETTERS, PLEASE)

Address .....

.....

"Cyldon" Precision Variable CAPACITORS

From **MINIATURE TRIMMERS** to **HIGH VOLTAGE TRANSMITTER CAPACITORS**

Here are shown just two examples from the comprehensive "Cyldon" range. For precision, stability, and long life, "Cyldon" superiority is recognised by all designers and users of electronic equipment.

No. 26. Mica Compression Trimmer

For use in Television circuits. High stability with constant, wide, capacity swings and long life at high voltage. Blade resilience not affected by conditionalsetting. Low loss Rockite base and best Mica di-electric give very efficient Power Factor. Loeskin method prevents flash-over from blade movement. Capacities up to 1,000 pF at 1,500 or 3,000 v. D.C. test and up to 2,000 pF for 250 v. D.C. test. 1.225 diam., 1¼in. high.

No. 18 S. Air Di-electric Trimmer



Of high stability and excellent Power Factor. High but smooth operating torque. Metal parts silver plated. First grade ceramic base. Single-hole fixing. Split stator and locking versions also available. Max. capacities from 10-20 pF. Base size 1 × ⅞in.

Enquiries invited from Equipment Manufacturers and Wholesale Trade only.

● *Full details of the complete "Cyldon" range, and list of Overseas Agents available from the Manufacturers:*

SYDNEY S. BIRD & SONS LTD. *Contractors to Ministry of Supply, Post Office, and other H.M. Government Depts.*

CAMBRIDGE ARTERIAL ROAD · ENFIELD · MIDDX. *Enfield 2071-2*

CAPACITANCE

FIXED CONDENSERS: You see them every day in electronic equipment and take them at their face value. The condenser manufacturer can't — he must determine their capacitance, power factor and other important characteristics with the aid of high grade test equipment. When *you* want to make measurements of this type, remember that a range of Marconi instruments is available specially designed for the job.

MARCONI instruments

SIGNAL GENERATORS · BRIDGES · VALVE VOLTMETERS · Q METERS · FREQUENCY STANDARDS
OUTPUT METERS · WAVE METERS · WAVE ANALYSERS · BEAT FREQUENCY OSCILLATORS

MARCONI INSTRUMENTS LTD · ST. ALBANS · HERTS · Phone: St. Albans 6161/7

Midland Office: 19 The Parade, Leamington Spa. **Northern Office:** 30 Albion Street, Hull.
Export Office: Marconi House, Strand, London, W.C.2

Introducing

THE

Reflectograph

MAGNETIC TAPE RECORDER

Excellent performance — easiest operation

Combining the following advanced features:

Simplified slot loading. Continually variable tape speed setting from 3in. to 8in. per second. Accurate meter indication of tape speed from capstan. Any speed between 3in. and 8in. per second can be selected and locked. Three motor system. Two only used during "play." Fast forward and re-wind speeds. Entirely new type of tape drive mechanism. Fully automatic spool brakes. Automatic brakes give constant pull-off torque to supply spool. Double track recording.

Technical Specification:

Frequency response 50 cycles to 9 Kcs
4 watts output

Loudspeaker 10in. Table Model. 12in. Console Model

Controls Record/playback Selector Switches (2) Bass, Treble and gain controls

External Connections Microphone, Radio feeder unit, Loudspeaker (15 ohms) Supply Socket for radio feeder unit

Speeds Continuously variable from 3in. to 8in. per second. Set by meter. Standard speeds of 7½in. and 3¾in. specially marked. Twin track recording giving one hour at 7½in. or two hours at 3¾in. per sec.

Record Level By meter

Tape Drive 3 motor system

Heads Bradmatic high impedance

RECORD/PLAYBACK AMPLIFIER and TAPE DRIVE MECHANISM assembled together as one unit

★ The Reflectograph Tape Recorder may be seen and heard at B-K Partners Ltd., 229, Regent St., London, W.1.

Illustrated folder from

RUDMAN DARLINGTON (ELECTRONICS) LTD.
LICHFIELD ROAD, WEDNESFIELD, STAFFS
Tel.: Wolverhampton 31704

2150

CONSTANT VOLTAGE POWER SUPPLY UNITS

MODEL 101-C

Output: 250/400v. 0-250mA. max.
Stability: Better than 0.1%.
Output Impedance: Less than 1 ohm.
Output Ripple: Less than 2mV. R.M.S.
Mains Supply: 200/250v. 40-60c/s.
Regulation down to zero load.

DETAILS ON REQUEST.

ALL-POWER TRANSFORMERS LTD.
CHERTSEY ROAD, BYFLEET, SURREY.
Tel.: Byfleet 3224/5.

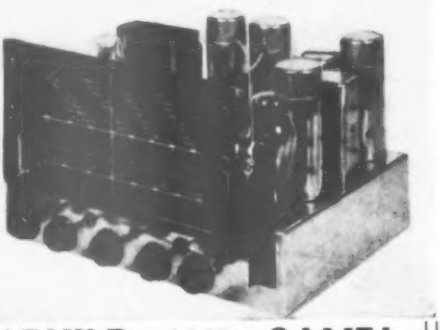

*BUILD AND SAVE!

ANYONE can build our handsome RECEIVERS, AMPLIFIERS AND TEST EQUIPMENT! and the knowledge that you have BUILT IT YOURSELF will make you EXTRA PROUD! As thousands of delighted "fans" already know the secret lies in using our **ALIGNED COMPONENTS**, including ready-punched chassis, and fully identified parts.
* ALL PARTS AND UNIQUE "EASY AS A.B.C." CONSTRUCTION SHEETS AVAILABLE. NO COMPLICATED ALIGNING OR TEST GEAR REQUIRED!
NOTE for Connoisseurs:—Our 40 FEEDER UNIT, with r.f. stage and Hi-Fi switching for local stations, and 10 w. push pull QUALITY AMPLIFIER with variable negative feedback is the TOPS!!!
For full details, a host of circuits, data, etc., send 2/6 NOW for NEW ENLARGED EDITION of "THE HOME CONSTRUCTOR'S HANDBOOK."
This is definitely the best value on the market to-day! All items supplied by MAIL ONLY from Dept. W.W. ON

RODING LABORATORIES
301, HURN AIRPORT, CHRISTCHURCH, HANTS.

VALVES For SPECIAL PURPOSES

For stabilised power supplies

A typical example of the use of Ediswan Mazda 12E1 valves is illustrated in these photographs of a standard rack-mounted unit as supplied by All-Power Transformers, Ltd., for Government Communication and G.P.O. use. These units supply a stabilised D.C. output up to 5 amps. The Ediswan Mazda 12E1 is an indirectly heated Beam Tetrode designed for use as a series or shunt control valve in stabilised power packs.

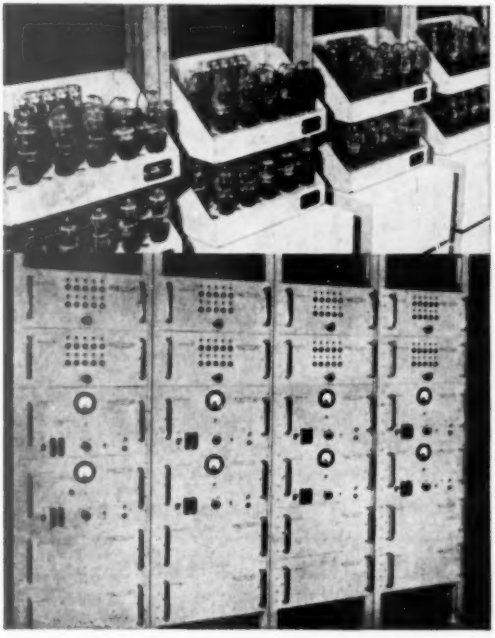

RATING		
Heater Voltage (volts)	V_h	6.3
Heater Current (amps.)	I_h	1.6
Maximum Anode Voltage (volts)	$V_{a(max.)}$	800
Maximum Screen Voltage (volts)	$V_{g2(max.)}$	300
Maximum Control Grid Voltage	$V_{g1(max.)}$	—100
Maximum Voltage between g1 and g2 (volts)	$V_{g1\text{-}g2}$	400
Mutual Conductance (mA/V)	g_m	* 14
Maximum Anode Dissipation (watts)	p_a	35
Maximum Screen Dissipation (watts)	p_{g2}	5.0
Maximum Cathode Current (mA)	$I_{k(max.)}$	300
Maximum Potential Heater/Cathode (volts DC)	$V_{h\text{-}k(max.)}$	† 300

* Taken at $V_a = Vg2 = 150_v$ $I_a = 200$ mA.
† Provided the cathode is positive.
Base — International Octal.

LIST PRICE £2. 10s. 0d. (provisional)

EDISWAN

MAZDA

VALVES AND CATHODE RAY TUBES

THE EDISON SWAN ELECTRIC CO. LTD., 155 CHARING CROSS ROAD, LONDON, W.C.2

Member of the A.E.I. Group of Companies

E.V.25

the Connoisseur 3-speed gramophone motor

This new motor unit is another noteworthy achievement in the "Connoisseur" tradition. Full 12" turntable 33⅓, 45 and 78 r.p.m. The synchronous motor is virtually vibrationless and suitable for standard, transcription and microgroove recordings.

Connoisseur

Main turntable spindle, precision ground and lapped, runs in phosphor-bronze bearings. Low noise level and hum induction. Input voltages: 200-250 A.C. 50 cycles or 60 cycles to order at no extra charge.

Price £16.10.0 plus £7.3.0 P. Tax

A. R. SUGDEN & CO. (Engineers) LTD., WELL GREEN LANE, BRIGHOUSE, YORKSHIRE.

Telephone: HALIFAX 69169

The

"TELEMAX" LONG RANGE 50-μ/volts

BIG PICTURE 4' x 3'

23 valve s/h. circuit. Sensitivity better than 50 microvolts. Full bandwidth. 4' × 3' picture. 5 channel facility. A.C. only. Insulated chassis. Neutral coloured rexine covered case, size approx. 25" × 22" × 21", fitted with castors and geared lifting jack for tilt. Complete with valves, c.r.t. and optical unit.

Detailed Specification from the Manufacturers:—

TELEMECHANICS LTD.
3 NEWMAN YARD, NEWMAN ST.
LONDON, W.1 *LANgham 7965*

AMPLIFIERS

The Why and How of Good Amplification

By G. A. BRIGGS & H. H. GARNER

18 Chapters, 216 p.p. 174 illustrations (including more than 40 original oscillograms). Printed on Fine Art Paper. Bound Full Rexine.

PRICE 15/6 BY POST 16/-

PIANOS, PIANISTS & SONICS

By G. A. BRIGGS

An invaluable guide for all Sound Enthusiasts and Music Lovers. 192 p.p. printed Fine Art, paper size 8¼ x 5½ bound full rexine, 102 illustrations.

PRICE 10/6 *BY POST 11/-*

LOUDSPEAKERS

By G. A. BRIGGS

The Why and How of Good Reproduction. 3rd Edition (7th impression). 36 illustrations, 88 pages.

PRICE 7/6 *BY POST 7/9*

PUBLISHED BY

Wharfedale

WIRELESS WORKS

BRADFORD ROAD, IDLE, BRADFORD, YORKS

Tel: Idle 461

THE "REPORTER" A NEW LOW COST MOBILE RADIO-TELEPHONE

Maximum economy to the user, both in initial outlay and operation, is the outstanding feature of the Pye "Reporter" mobile radio-telephone. Compact, light in weight, and with an extremely low power consumption, the "Reporter" is ideal for all 2-way mobile communication schemes where low capital cost is essential.

SPECIFICATION:

Frequency Range	PTC 116 60-100 mc/s. PTC 117 100-184 mc/s.

The set is intended for simplex working on a "press-to-talk" basis in either double or single frequency schemes.

Size	9 in. wide x 14 in. deep x 5½ in. high (23 x 33 x 14 cm.) overall.
Weight	17 lb. (7.7 Kg.) including cradle and telephone handset.
Power Supply	6 or 12 V. D.C., positive or negative earth

Power Consumption		
Receiver only	3.0 amps.	At 6 volts these figures are approximately doubled.
Standby	3.5 amps.	
Transmitter	4.0 amps.	
Controls		
On front panel	On/Off switch and A.F. volume control.	
On handset	Receive/transmit pressel switch.	

★ The "Reporter" is suitable for use in tropical climates.

PYE
Telecommunications
CAMBRIDGE ENGLAND

Overseas Enquiries to:
EXPORT DEPT. • PYE LTD. • CAMBRIDGE • ENGLAND

B

Specially designed by H·M·V

FOR THE 'UP COUNTRY' LISTENER

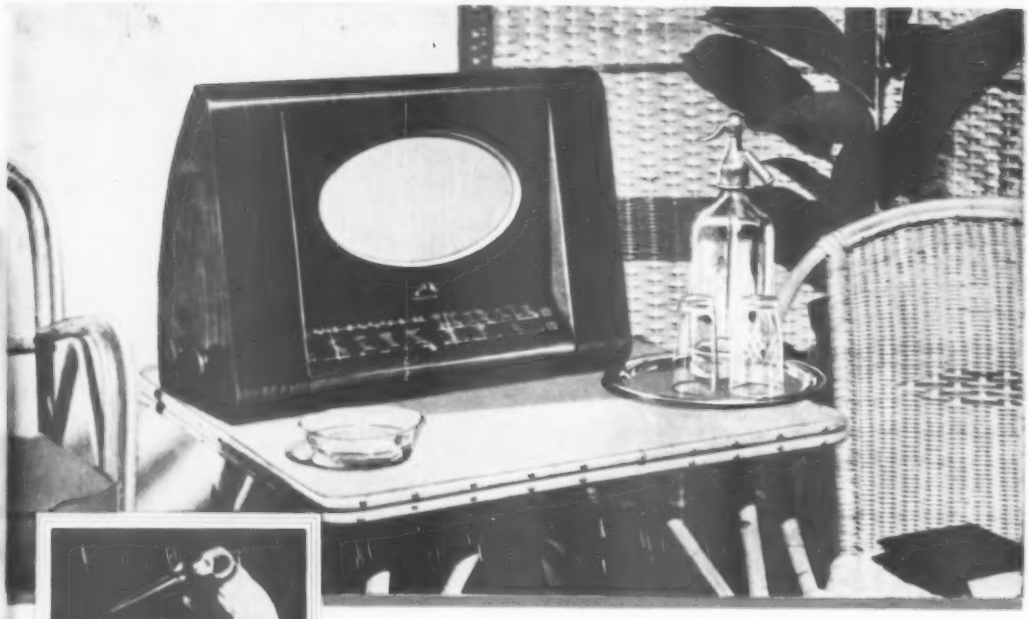

"HIS MASTER'S VOICE"

The Hallmark of Quality

Here is an H.M.V. 6 valve, 4 waveband superhet receiver using all-dry batteries, distinctive in appearance and offering a unique performance equal of any mains set in its class.

MODEL 5614 (*Tropical waveband coverage*)
WAVE RANGES
M.W. 187-575 metres (1604-522 kc/s)
S.1. 31.3-91 metres (9.58-3.3 Mc/s)
S.2. 16.2-32.25 metres (18.52-9.29 Mc/s)
S.3. 11.3-16.4 metres (26.55-18.29 Mc/s)

MODEL 5613 (*European waveband coverage*)
WAVE RANGES
L.W. 900-2000 metres (333-150 kc/s)
M.W. 187-575 metres (1604-522 kc/s)
S.1. 31.3-91 metres (9.58-3.3 Mc/s)
S.2. 16.2-32.25 metres (18.52-9.29 Mc/s)

Among its special features are:

★A new type frequency changer which gives exceptional stability and high frequency performance unobtainable with a normal battery valve.

★Exceptionally good reception on short waves.

★Extra intermediate frequency stage for improved sensitivity and selectivity.

★A specially designed high gain push-pull output stage and a new hyper-sensitive 10½" elliptical loudspeaker with a flux density of 12,000 lines per sq. cm. giving an acoustic output equal to that of a good mains set.

★Large, clearly marked tuning scale calibrated with wavelengths, frequencies and station names. Visible on/off indicator.

★Variable tone control under all conditions of reception.

★Sockets for connecting a record player with a "GRAM" position on the wave change switch so that player may be left connected.

★An elegantly slim cabinet with the controls neatly disposed at the sides.

"HIS MASTER'S VOICE"

Radios & Radiograms—The Finest in the World

THE GRAMOPHONE COMPANY LIMITED • HAYES • MIDDLESEX • ENGLAND

FOR INSPECTION OF:—

★ Divers' work ★ Ships' bottoms ★ Pier and harbour works
★ Wrecks ★ Dockgates ★ Sea-beds ★ Trawl nets in operation

AND MANY OTHER JOBS

MARCONI—SIEBE, GORMAN

UNDERWATER TELEVISION EQUIPMENT

MARCONI'S WIRELESS TELEGRAPH COMPANY LTD · CHELMSFORD · ESSEX
SIEBE, GORMAN & COMPANY LTD · NEPTUNE WORKS · TOLWORTH · SURREY

Laminations

ELECTRICAL
STEEL
LAMINATIONS

ALL SIZES
AND FOR ALL
FREQUENCIES

TELEPHONE
DIAPHRAGMS

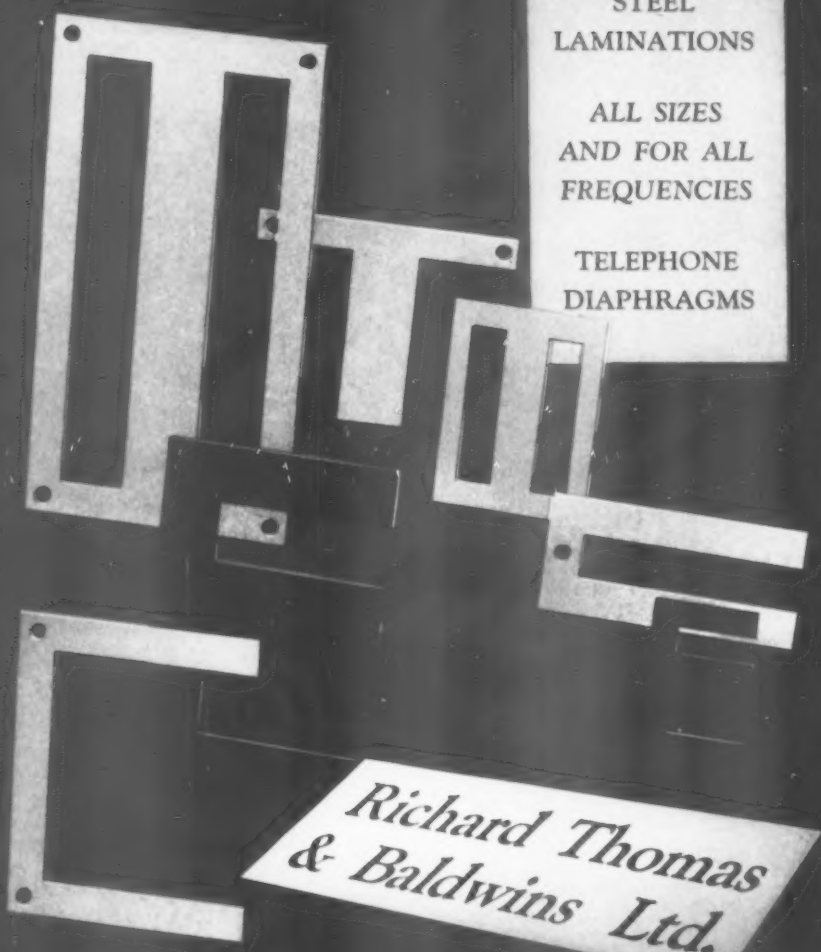

Richard Thomas & Baldwins Ltd.

AIRMEC

VALVE VOLTMETERS

Valve Voltmeter Type 712 (illustrated above)

★ Frequency range from 30 c/s to 200 Mc/s
★ Balanced, unbalanced and differential inputs
★ Measures both positive and negative D.C. voltages
★ Six resistance ranges reading up to 100 megohms
★ Balanced circuitry ensures exceptional stability
★ Very low probe input capacity
★ Quick delivery

Millivoltmeter Type 784 (illustrated below)

(Wide-band Amplifier and Oscilloscope Pre-Amplifier)

★ Frequency range from 30 c/s to 10 Mc/s
★ Voltage ranges 0-10, 0-100, 0-1000 millivolts
★ Cathode follower probe
★ Can be used as an amplifier up to 15 Mc/s
★ Quick delivery

Full details of these or any other Airmec instruments will be forwarded gladly upon request

AIRMEC LABORATORIES **LIMITED**
HIGH WYCOMBE : BUCKINGHAMSHIRE : ENGLAND
TEL.: HIGH WYCOMBE 2060 CABLES: AIRMEC, HIGH WYCOMBE

C 1 C

High Speed SOLDERING

★ twice as fast
★ more efficient
★ more economical

Wolf Electric SOLDERGUN

EACH REEL HOLDS 15 FEET CORED SOLDER

HEAT CONCENTRATED AT WORKING POINT

PERFECT CONTROL FOR SMALL ASSEMBLY AND JOINTING WORK

FINELY BALANCED WITH EASY-GRIP PLASTIC HANDLE

RAPID, CONSTANT HEAT

TRIGGER ACTION FEED

LOW CURRENT CONSUMPTION

TYPE SI

Supplied complete with 15 feet reel of acid cored solder, spare 15 feet resin cored solder and fitted with 5 feet tough rubber 3-core cable. Finished in heavy chrome.

★ Wolf Solderguns and Soldering Irons available for all work from fine instrument to heavy industrial duty

★ OBTAINABLE FROM ALL LEADING TOOL MERCHANTS AND FACTORS

WOLF ELECTRIC TOOLS LTD.
PIONEER WORKS, HANGER LANE, LONDON, W.5

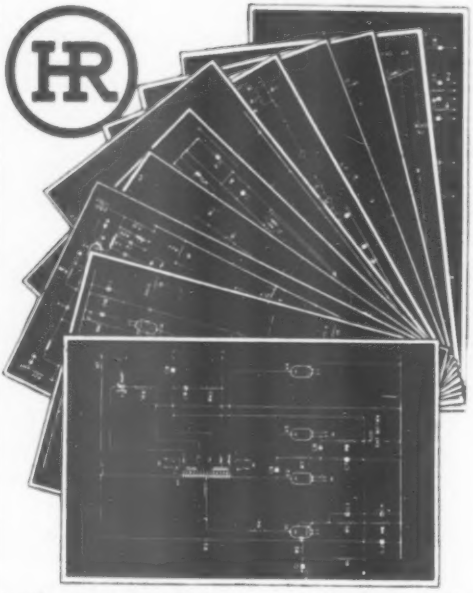

TELEVISION CIRCUITS
NEW 4TH EDITION 3/6 NOW READY POST FREE
HAYNES RADIO LTD. QUEENSWAY, ENFIELD, MIDDLESEX

DECCA?
LEAK?
ROGERS?
ACOUSTICAL?

Which shall it be ? ? ?

If you are in doubt, visit our shop in Fleet Steet. Besides giving you excellent advice we have a special room set aside where at least 16 different combinations of amplifiers and speakers are available at the turn of a switch. Any other combination set up within a few minutes.

Here you can sit and listen in comfort, and decide which you like the best.

Apart from the makers mentioned above, we carry a complete stock of Wharfedale, Garrard, Connoisseur, Armstrong products, etc. ***If you cannot visit us,*** avail yourself of our first-class Mail Service.

Also please note, we will arrange Part Exchange of your existing equipment, against the supply of the latest models.

H.P. terms if required. One-third deposit and the balance plus 10 per cent in 12 monthly instalments.

CITY SALE & EXCHANGE Ltd.
93-94 FLEET STREET, LONDON, E.C.4 (Ludgate Circus)
Telephone: Central 9391

Measurement of Magnetic properties of Radiometal Stator Laminations by A.C. Potentiometer.

Routine Factory testing of Mumetal toroidal cores.

Precision measurement of magnetic characteristics of toroidal Mumetal cores by the Ferrometer.

Projection Microscope in use in Metallographic laboratory.

Precision measurement of X-Ray difraction pattern.

Automatic testing of physical characteristics of Telcon wire specimens.

Technical Control

The key to the consistent excellence of TELCON Magnetic and Special-purpose Alloys.

Close technical control of production is an all-important factor in the manufacture of Telcon Metals. Accurate tests and measurements are made at various stages in the course of production and the above illustrations show a few of the many routine examinations conducted in our well-equipped laboratories.

MAGNETIC ALLOYS—Mumetal, Radiometal, Rhometal, H.C.R., Permendur, R2799, 36/64, Dust.
RESISTANCE ALLOYS—Pyromic, Calomic, Telcuman, Telconstan, Telconal
SPECIAL ALLOYS—Thermostatic Bimetals 140, 400, 15, Telcoseal, Invar, Beryllium-Copper.

TELCON METALS

THE TELEGRAPH CONSTRUCTION & MAINTENANCE CO LTD

HEAD OFFICE: 22 OLD BROAD STREET, LONDON, E.C.2. *TELEPHONE:* LONdon Wall 7104
ENQUIRIES TO: TELCON WORKS, GREENWICH, LONDON, S.E.10. *TELEPHONE:* GREenwich 3291

They are the most Reliable

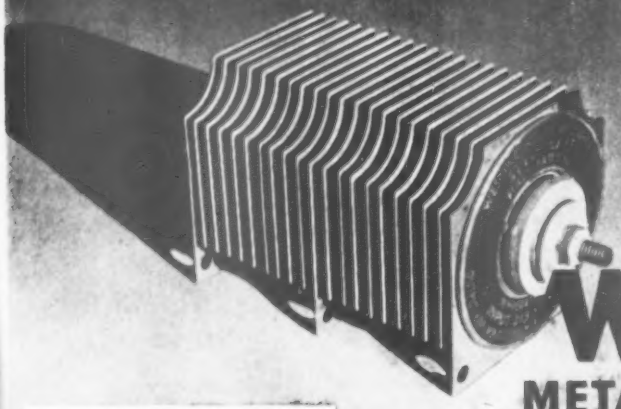

WESTINGHOUSE
WESTALITE
METAL RECTIFIERS

Send 6d. for a copy of "THE ALL-METAL-WAY" to Dept. W.W.10.

WESTINGHOUSE BRAKE & SIGNAL CO., LTD., 82, York Way, King's Cross, London, N.1.

CITY & RURAL

IMMEDIATE DELIVERY FROM STOCK

"VIEWMASTER"

SPECIFIED COMPONENTS

Send for Stage 1 now — price £3/2/3, post free. Complete Kits, Stage-by-Stage and Single Components Supplied. "Viewmaster" Construction Envelopes ..... 7/6 ea

LARGE STOCKS GENERAL TELEVISION COMPONENTS

MANUALS: "Television Explained," 8/-. Brimar, Mullard & Osram Valve Manuals, 3/-. "Wireless World" Valve Guide, 3/6. All manuals post and packing 6d.

EMI HIGH COERCIVE TAPE, 1,200ft. spools, 35/- each
GEC HIGH COERCIVE TAPE, 1,200ft. spools, 30/- each

TRANSFORMERS: 30 v. 2 a. for models, etc., Tapped 3-4-5-6-8-9-10-12-15-18-20-24 v., 21/-; 350-0-350 v. 80 mA. 6.3 v. 4 a., 5 v. 2 a., 21/-. Ditto but 250-0-250 v., 31/-. Heater 6.3 v. 1.5 a., 7/6. All Primaries 200-220-240 v.
CHOKES: 10 H. 100 mA., 8/3; 15 H. 60 mA., 5/11.
ELECTROLYTICS: 8 mfd. 450 v. Tubular, 2/3. 16-16 mfd. 450 v., 6/9.
CO-AXIAL CABLE: All makes in stock. Belling 72 ohm, Twin Feeder, 7½d. yard.
COILS, COIL PACKS: Osmor HO Coil Pack, 52/-. Osmor R.F. Stage for HO Coil Pack, 21/8. Wearite "P" Coils, 3/-. TRF Coils, 7/6 pair.
LOUDSPEAKERS: 8in. PM, 18/6; 5in. PM, 14/6; 3in. PM, 13/6.
MIDGET WIREWOUND VOL. CONTROLS: 100-250-1K-2K-2.5K-3K-5K-10K-30K ohms, 3/4 each.
Terms: C.W.O. or C.O.D. over £2. Over £2 post free, otherwise please add 1/- post and packing.

MATCHED VALVES, RESISTORS, &c.

Extensive Stocks New and Surplus Components, Special Purpose Valves, &c.

FOR ATTENTION—ADVICE—SERVICE, WRITE

CITY & RURAL RADIO,
101, HIGH STREET, SWANSEA, GLAM.

Telephone: Swansea 4677



A MODERN AC/BATTERY AMPLIFIER
—AT A KEEN PRICE

THE GRAMPIAN Type 524 15 watt Amplifier, for use on 100/260 volts A.C. mains and 6 volt Battery.

LIST PRICE

£38 - 0 - 0

Combining all the following advantages . . . Separate input controls for Microphone and Gramophone. Change over switch for mains or battery supply. Stand-by switch to reduce battery consumption. Separate bass and treble tone controls. Choice of output impedances for one or two 15 ohm loud speakers.

ALSO AVAILABLE AS THE GABA PORTABLE OUTFIT

The case when separated forms the two loud speakers: moving coil, pressure operated type microphone with slide action on/off switch and desk type stand provided.

price complete **£50** (TAX FREE)

For full details write to:

GRAMPIAN REPRODUCERS LTD

9 HANWORTH TRADING ESTATE, FELTHAM, MIDDX.

Phone: Feltham 2657 *Grams: Reamp, Feltham*

22562

Examples from the New range of

TAYLOR INSTRUMENTS

Model 88A.

A completely new instrument supreme in its class with an extremely handsome appearance. Portable, universal and providing wide testing facilities to meet all today's requirements. Designed to ensure simplicity of operation, accuracy and precision reliability; its many ranges and high sensitivity commend it for both workshop and laboratory.

List Price £21 : 10 : 0

Available on H.P.

Models 71A, 72A & 77A.

An entirely new range of instruments incorporating the latest improvements in manufacturing technique. Refinements include rugged moulded cases, clear and easy to read scales and many other features.

List Price 71A £12 : 10 : 0 72A £16 : 0 : 0

77A £15 : 0 : 0

These instruments are also available on H.P.

Panel Meters

We manufacture a complete range of moving coil, moving iron and electrostatic meters and welcome the opportunity of quoting you for your requirements.

★ **Obtainable from your usual supplier.**

For full details of the complete range of Taylor products, please write for our new 16 page catalogue.

TAYLOR ELECTRICAL INSTRUMENTS LTD.

Montrose Avenue, Slough, Bucks. **Telephone : Slough 21381**

Delco Power for AIRCRAFT

As a contribution to the rearmament programme GENERAL MOTORS LIMITED have made arrangements for DELCO motors for the Aircraft Industry and other special purposes to be manufactured at the FRIGIDAIRE DIVISION.

The Delco range of British-made motors, generators, rotary transformers etc. for aircraft is designed to provide power for a wide variety of ancillary equipment including electronic control gear and radio.

Design approval is held from the Ministry of Supply Director of Instrument Research and Development, for D.C. Aircraft Electric Motors.

Available motors include totally enclosed, fan ventilated flame-proof and immersed types built to meet users' requirements and the relevant M.O.S. specifications. All motors achieve maximum output with minimum weight and many variations of standard designs are regularly manufactured to meet individual demands.

some typical applications . . .

- ★ SERVO DEVICES ★ FUEL PUMPS
- ★ GUN TURRET MECHANISM
- ★ BLOWERS ★ SCANNER DRIVES
- ★ DE-ICING EQUIPMENT
- ★ FOLLOWER DEVICES
- ★ HYDRAULIC PUMP DRIVES
- ★ VENTILATING FANS
- ★ CAMERA DRIVES
- ★ FLAP OPERATORS
- ★ RADIATOR SHUTTERS
- ★ BOMB SIGHT



2½" dia. Frame Size Motor
Two Pole—D.C.



3" dia. Frame Size Motor
Two Pole—D.C.



Immersed Fuel
Boost Pump Motor.

All enquiries for

DELCO Reg'd Trade Mark **AIRCRAFT MOTORS**

To FRIGIDAIRE DIVISION OF GENERAL MOTORS LIMITED
STAG LANE · KINGSBURY · LONDON N.W.9 · Colindale 6541

DIRECT T/V REPLACEMENTS

(Regd.)

Prop. **A. ROSE**, A.M.I.E.

134-136 LEWISHAM WAY, NEW CROSS, S.E.14

TIDEWAY 3696

ANNOUNCES
A NEW SPARE PARTS MANUAL

RESERVE YOUR COPY TODAY. Delivery approx. 14 days.

CONTENTS

1. Price list of parts used in most makes of T/V sets. (This is invaluable when estimating, even if you do not use our service.)
2. Notes on a number of manufacturers' modifications.
3. Details of our loan scheme.
4. Particulars of the quickest "Direct T/V Replacement" service in England.

Do not waste time explaining that you are waiting for a part. Phone TIDEWAY 3696.

POST THIS COUPON TO-DAY FOR MANUAL

DIRECT T V REPLACEMENTS, TIDEWAY 3696
134-136 Lewisham Way, New Cross, S.E.14.

I enclose 6d. stamps for your new "Spare Parts Manual." Please dispatch as soon as available.

NAME/FIRM .....

ADDRESS .....

PHONE NUMBER .....

★ *introducing* ★

our latest kit

The Skyway **TAPE RECORDER & RECORDING AMPLIFIER**

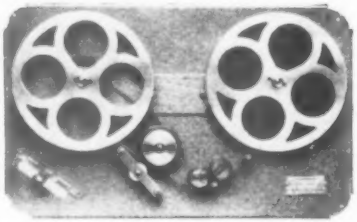

Available as a kit of machined parts ready for assembly or as a complete unit ready for use. Many desirable features are incorporated including 2-speed operation for 3¾in. or 7½in. per second; HI-FI record playback and I.R.F. erase heads of the half-track type giving over 2 hours playing time on one reel of tape. Completely automatic operation with ONE-KNOB CONTROL for stop, rewind and forward; instant rewind without unthreading. Ball-bearing capstan, oilite self-lubricating bushes to all other bearings. Attractive blue mottle hammered finish.

RECORDER UNIT

KIT PRICE 18 GNS
Less Tape & Reels

COMPLETE Wired & Tested **£25**
With Tape & Reels

De Luxe AMPLIFIER KIT with 8-stage wiring diagram. **14 GNS**

Illustrated leaflet free on request.

Frith **RADIOCRAFT** *Ltd*
PHONE 58927
67-71 CHURCH GATE LEICESTER

ONLY the LAB unit has all these features...

- ★ Continuous storage
- ★ 700 resistors in a space 12" x 4" x 4"
- ★ Ohmic values separately carded
- ★ Finger-tip selection

Here's the most practical way of buying and storing resistors that anyone could wish for. Occupies only 48 sq. in. of shelf space. As easy to use as a card index. Rapid selection from 700 sorted and carded resistors. Continuous storage — empty cards merely replaced with full ones available from stock. The Lab Continuous Storage Unit is supplied FREE with initial purchase of

180 Type R Resistors (Order LSUC ½)
or 240 Type T „ (Order LSUC ¼)

THE LAB TESTED CONTINUOUS STORAGE UNIT

RESISTOR SPECIFICATION

Ref.	Type	Loading	Max. Volts	Range	Dimensions
T	¼-watt	½-watt	250	10 ohms	[illegible]
				to	
R	½-watt	1-watt	500	10 megohms	[illegible]

Tolerance available ± 20%, ± 10% ± 5%

The Lab Continuous Storage Units are available from your normal source of supply, but more detailed information can be obtained from

THE RADIO RESISTOR COMPANY LTD

50 ABBEY GARDENS, LONDON, N.W.8 · Telephone: Maida Vale 5522

THE WORLD TURNS COLLARO QUALITY PRODUCTS

They're 3-speed—
they "Take all Records"

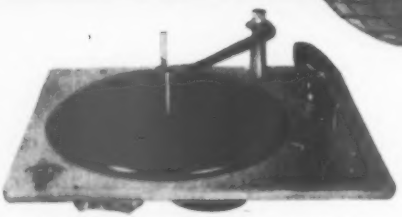

JRC521 NON-MIXING RECORD CHANGER

Beautifully designed to play 33⅓, 45 and 78 r.p.m. records with a minimum need for adjustments. Features a new, foolproof record dropping mechanism . . . patented 3-speed rim-drive . . . plug-in pick-up heads. A.C. supplies. Also available—Single-speed "non-mixers," single and 3-speed "mixers."

AC 3514 GRAMOPHONE UNIT

A brilliant 3-speed unit featuring patented 3-speed rim-drive . . . 3-point spring suspension eliminating acoustic feed-back . . . plug-in pick-up heads. A.C. supplies. Also available—Single-speed rim-drive units and A.C. or A.C./D.C. governor controlled units.

—AND A NEW PICK-UP FOR SALES

The new Collaro ORTHODYNAMIC Pick-up plays ALL records ! Features twin-point stylus and patented weight-compensating arm. Needle selection and appropriate pressures are effected by simple switch mechanisms.

Trade Enquiries to :

COLLARO LTD., RIPPLE WORKS, BY PASS ROAD, BARKING, ESSEX. Phone: Rippleway 5533

THE FAMOUS BENNETT COLLEGE

can help your career through personal postal tuition

in any of these subjects :

Accountancy Exams. ★ Aircraft Eng. & Radio ★ Architecture ★ Auditing ★ Book-keeping ★ Building ★ Carpentry ★ Chemistry ★ Civil Service ★ Commercial Art ★ Commercial Arithmetic ★ Company Law ★ Costing ★ Diesel Engines ★ Draughtsmanship ★ Electric Wiring ★ Engineering (Civil ; Electrical ; Mechanical ; Motor ; Steam ; Structural) ★ Jigs, Tools & Fixtures ★ Journalism ★ Languages ★ Mathematics ★ Mining ★ Modern Business Methods ★ Plumbing ★ Police ★ Press Tool Work ★ Quantity Surveying ★ Radio ★ Salesmanship ★ Secretarial Exams. ★ Shorthand ★ Surveying ★ Telecommunications ★ Television ★ Textiles ★ Works Management ★ Workshop Practice

and GENERAL CERTIFICATE OF EDUCATION

SUCCESS WILL BE YOURS

As a Bennett College Student your own Personal Tutor will coach you until you qualify, at your pace with no time wasted. You will learn quickly, easily.

SEND TODAY FOR A FREE PROSPECTUS

TO THE BENNETT COLLEGE, DEPT. J.41, SHEFFIELD

Please send me your prospectus on .....
(Subject)

NAME .....

ADDRESS .....

..... AGE (IF UNDER 21).....

PLEASE WRITE IN BLOCK LETTERS

JUST PUBLISHED

TELEVISION FAULTS

N. STEVENS

72 pages : 24 page supplement Demy 8vo. 5/-

THIS BOOK CONTAINS—

A quick reference fault guide giving more than 60 faults, with test procedure.

Detailed explanation of probable faults in all sections of the receiver, arranged in logical sequence. Diagrams of the various sections are included, together with fault tables to aid quick location.

Half-tone illustrations of typical defects in picture, with designation of faults responsible.

A comprehensive index.

A supplement comprising circuit diagrams and specifications of the following British televisors :

BAIRD "EVERYMAN," ENGLISH ELECTRIC, MARCONIPHONE, MURPHY, PHILIPS PROJECTION and ULTRA.

Television Receiver Practice, by Roy Holland.....	5 -
The Oscilloscope Book, by E. N. Bradley.....	5 -
Magnetic Recording : Wire and Tape, by M. L. Quartermaine	5 -
Audio Handbooks, by N. H. Crowhurst, A.M.I.E.E. each	3 6

No. 1. Amplifiers ; No. 2. Feedback.

NORMAN PRICE (PUBLISHERS) LTD.,
283, City Road, London, E.C.1.

FERRANTI
Transformers and Chokes

The 'H' range transformers and chokes are designed to meet the most stringent requirements for Service and Civil Radar and Radio Equipments. They are hermetically sealed and fully tropicalized, and their compactness is made possible by using 'C' cores of high efficiency. Each unit is individually tested. Components can be supplied to meet individual needs with ratings up to 1½ kVA at 50 cycles and correspondingly higher ratings at higher frequencies.

'H' range
Hermetically sealed. 'C' core construction

FERRANTI LTD. TECHNICAL SALES DEPARTMENT FERRY ROAD EDINBURGH 5

FERRANTI

An important new book recently published for WIRELESS WORLD

Radio Interference Suppression

As Applied to Radio and Television Reception. This practical handbook by G. L. Stephens, A.M.I.E.E., provides an up-to-date guide to the various methods of suppressing electrical interference with radio and television reception, particular attention being paid to the problem at television frequencies. The author describes in detail the origins of interference and the whole theory of suppression technique. Many practical applications are given.

Typical interfering appliances discussed include: engine ignition systems, switches, thermostats and contactors, electric motors and generators, rotary converters, neon signs, fluorescent lighting, etc. Other chapters deal with the design and choice of suppressor components, methods of locating the source of interference, and suppression at the receiver itself.

10s 6d *net*. *By post* 10s 11d.

Other selected titles

Advanced Theory of Waveguides

By L. Lewin. Sets out the various methods that have been found successful in treating the problems arising in waveguide work. The author has selected a number of topics as representative of the field in which the centimetre-wave engineer is at present engaged. 30s *net*. *By post* 30s 7d.

Sound Recording and Reproduction

By J. W. Godfrey and S. W. Amos, B.SC., A.M.I.E.E., in collaboration with the BBC Engineering Division. Covers in detail the theory and practice of disc, magnetic and film recording with special reference to equipment used by the BBC. The text is fully illustrated with nearly 200 diagrams and photographs.

30s *net*. *By post* 30s 7d.

Obtainable at all booksellers or direct by post from the address below.

ILIFFE & SONS LTD., DORSET HOUSE, STAMFORD STREET, LONDON, S.E.1

? KNOWN OR UNKNOWN ?



RESISTORS CONDENSERS ACCURATELY INDICATED DIRECT ON DIAL

30/- ONLY

THE RADIO MAIL RES. CAP. BRIDGE KIT IS COMPLETE DOWN TO THE LAST NUT AND BOLT

5 megohms—50,000 ohms 50 mfd.—2 mfd.
100,000 ohms—1,000 ohms 1 mfd.—.01 mfd.
1,000 ohms—10 ohms .01 mfd.—.0005 mfd. (500 pF.)

NO CALIBRATING. An accurately calibrated panel with each kit. As illustrated.

NEW COMPONENTS. Specially selected for accuracy.

EASILY ASSEMBLED. Instructions, circuit and diagrams.

RADIO MAIL, 4, RALEIGH ST., NOTTINGHAM
stamp for list and with all enquiries, please

PERFECT TAPE-TO-DISC "DUBBING" and RECORDING COMBINATION

- FERROGRAPH TAPE RECORDER
- M.S.S. DISC RECORDER
- LEAK TL/12 AMPLIFIER

Hear this excellent combination at

SOUND DISCS (SUPPLIES) LIMITED
178 Bispham Road, Southport, 88153

and

TRANSCRIPTION & DUBBING SERVICES
126 High Rd., Willesden Green, London, N.W.10

Wearite Tape Decks — Disc Recorders
Magnetic Tape — Blank Discs
Reflex Speakers — Feeder Units

PRESSING AND DUBBING SERVICES
(Tape-to-Disc — Tape-to-Tape)
"Master" Making, etc.

TRADE — EXPORT — PROFESSIONAL

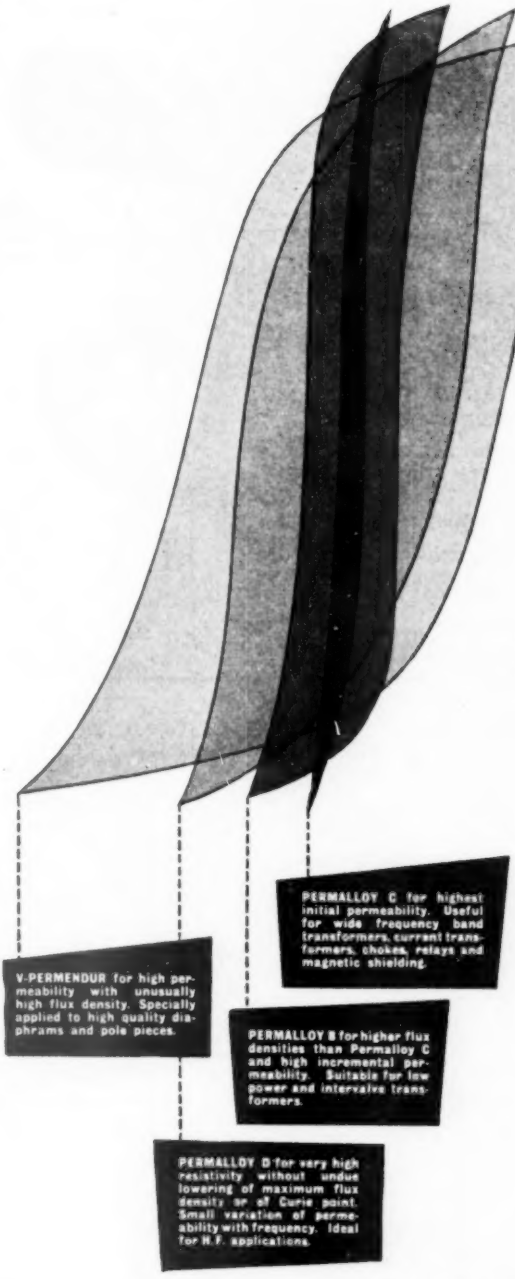
PERMALLOY C for highest initial permeability. Useful for wide frequency band transformers, current transformers, chokes, relays and magnetic shielding.
V-PERMENDUR for high permeability with unusually high flux density. Specially applied to high quality diaphrams and pole pieces.
PERMALLOY B for higher flux densities than Permalloy C and high incremental permeability. Suitable for low power and intervalve transformers.
PERMALLOY D for very high resistivity without undue lowering of maximum flux density or of Curie point. Small variation of permeability with frequency. Ideal for H.F. applications.

High permeability magnetic alloys

by *Standard*

have steadily been improved and extended in range over many years and are produced by a Company which has the unique advantage of being large scale users of these materials.

As a result of this, much direct experience of the requirements and the applications of magnetic alloys is available, thus giving a full appreciation of the desirable characteristics and the actual conditions of use.

Standard Telephones and Cables Limited

Registered Office : Connaught House, Aldwych, London, W.C.1

TELEPHONE LINE DIVISION North Woolwich, London, E.16 · ALBert Dock 1401

FORTIPHONE HEARING AID

uses MUREX Sintered Permanent MAGNETS

Actual size

This instrument (covered by Patents 671957 & 672988) is shown by courtesy of Fortiphone Ltd

Actual size of Magnet

Maximum magnetic energy in a limited area is required to ensure the efficient operation of this Hearing Aid receiver, and a Murex Alcomax III Sintered Permanent Magnet is used to provide these conditions. Efficiency and stability are distinguishing features of Murex Sintered Magnets.

MUREX LIMITED · *(Powder Metallurgy Division)*
RAINHAM · ESSEX *Telephone: RAINHAM ESSEX 3322*
London Sales Office: Central House, Upper Woburn Place, W.C.1. *EUSton 8265*

HIGH VOLTAGE EQUIPMENT

3,000—90,000 volts

Stabilised E.H.T. Supplies

Insulation and Ionisation Testers

Impulse Generators to 250kV.

Stabilised and unstabilised power units are now available between the ranges of 1,000 and 75,000 volts at 1 to 20 milliamps, and up to 90kV. at 2mA.

Write for full details to:

HVOLT LTD

34A, POTTERY LANE, LONDON, W.11

Telephone: Park 6955-5237

"EXCEL"

MAGNETIC TAPE RECORDERS

Although designed primarily for high quality synchronised sound with sub-standard film projectors, the EXCEL is used as a first class recorder for high fidelity work.

- WIDE FREQUENCY RESPONSE
- FREEDOM FROM "WOW" AND FLUTTER
- 10½ in. DIAMETER FLYWHEEL
- SUPERIMPOSING
- NOISE SUPPRESSION
- TAPE CAPACITY: 3,250 ft.
- PORTABLE. WIDTH 14½ in. DEPTH 17½ in. HEIGHT 8½ in.

For full details and nearest Agent please write to

EXCEL SOUND SERVICES LTD.
NORWOOD WORKS, NORWOOD AVE., SHIPLEY, YORKS.
Telephone: Shipley 51291.

Goodmans Industries Ltd

apologise for delay in the past

but are pleased to announce that supplies of

The AXIOM 150 Mark II

12-inch 15w. P.M. Loudspeaker

are available for immediate delivery

The very much improved acoustic properties of this the latest in the famous of AXIOM High Fidelity Loudspeakers command the admiration of all those who require quality and value in a speaker.

This high fidelity reproducer gives extremely smooth response in the middle and upper registers, ensuring minimum "scratch" from recordings. On most inputs this shows to advantage no matter what the origin.

In addition the AXIOM 150 Mk. II has a wide frequency range and the very low bass resonance ensures faithful reproduction down to the lowest frequency encountered in orchestral reproduction.

This new AXIOM is a marked advance on past models and is suitable for use with all good quality amplifiers.

Special reflex cabinets have been designed with speaker aperture at optimum listening height.

SPECIFICATION

Frequency Coverage	30/15,000 c.p.s.
Overall Diameter	12⅜" (31.3 cms.)
Overall Depth	6¹⁵⁄₁₆" (17.6 cms.)
Fundamental Resonance	35 c.p.s. nominal.
Voice Coil Diameter	1¾" (4.4 cms.)
Voice Coil Impedance	15 ohms at 400 c.p.s.
Max. Power Capacity	15 watts peak A.C.
Flux Density	14,000 gauss.
Total Flux	158,000
Nett Weight	12lbs. 13 ozs. max.

GOODMANS

You are invited to write for details of the Axiom 150 Mk. II and the specially designed reflex cabinets.

GOODMANS INDUSTRIES LIMITED, Axiom Works, Wembley, Middx. WEMbley 1200.

Hello Mike ...

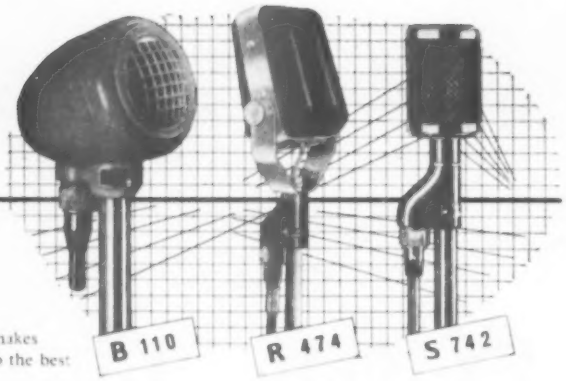

Say " Hello " to an amazing new type of Crystal Microphone—the " Ronette " Filter-cell.

A new filter-unit, which has been specially designed after long and extensive research, makes the " Ronette " crystal microphones equal to the best quality condenser types.

A complete range is available from £2 12 - to 15 gns. and there's a " Ronette " microphone for every purpose. Write NOW for details and technical specifications. Trade enquiries welcomed.

Stands also supplied.

RONETTE *filter-cell* **CRYSTAL MICROPHONES** *from*

PANREK★

★ **Sole Distributors to the Retail trade except for Model No. 088.**

PANREK MAGNETIC RECORDING LTD., 28, NEW BOND STREET, LONDON, W.1. • Cables: PANREK, LONDON. Telephone: MAY. 3903.

A
workshop
in your
pocket!

THE TELEVISION AND RADIO SERVICE ENGINEER'S **MASTER TRIMMER KIT**

Contains :

- 1 End Trimmer.
- 1 Side Trimmer.
- 1 Yaxley Switch Contact Adjuster.
- 1 Low Capacity Trimmer.
- 1 Screwdriver.
- 1 Set of Feeler Gauges.
- 1 Set of six Box Spanners from 1 to 8 B.A.
- 1 Set of Four Spanners from 6 to 8 B.A.

in durable black crackle finish metal case.

Export enquiries invited

SEND YOUR ORDERS TO:

J. & S. NEWMAN LTD. 100 HAMPSTEAD RD., N.W.1
Tel.: EUSton 5176/7

M. R. SUPPLIES Ltd.

draw the particular attention of Production Engineers and Laboratory Directors to the following brand new material available from stock. All prices nett.

STUART CENTRIFUGAL PUMPS. It is now well-known that there is considerable difficulty in maintaining supplies of the No. 10 and No. 12 but we can at present supply the following models immediately from stock. The new No. 16, fitted induction motor, 230/250 v. 50 c. 1 ph. With flooded suction will deliver up to 500 g.p.h. max. suction lift 6ft., max. head 11ft. The ideal unit for sustained duty. £11 15 - despatch 2/-. No. 21 fitted cap. induction motor, 230/250 v. 50 c. 1 ph. Max. suction 15ft., head up to 35ft. delivery up to 1,000 g.p.h. A fine heavy duty unit, £22 10 - (des. 2/6).

VARIABLE TRANSFORMERS. Exceptional opportunity, saving delay and expense. First class units by Philips Electrical Ltd. Input 220v. 50 c. Output infinitely variable 0/260v. Three very useful ratings for immediate despatch :— 520VA. £8 15 - (despatch 6/-); 1,040VA. £14 15 - (des. 7/6); 2,080VA. £19 17 6 (des. 7/6). We are already satisfying large demands for these excellent units and we promise instant despatch. All bench type—fully enclosed.

LONDEX A.C. RELAYS, model 1/24. Coil 220/240v. A.C. 2-pole C.O. mercury switching 15 amps. capacity. 75 - (des. 1/6). Also **LONDEX Ac. C.O. RELAYS** low capacity. Coil 230v. A.C. (tapped 110 v.) 2-pole C.O. 4 amps. capacity. 29 6 (des. 1/6). Also **LONDEX Model LP,** 220/240 v. A.C. coil, 2-pole C.O. (silver contacts) mounted and enclosed. 37 6 (des. 1/6). These are for 10-amp switching, but can be converted 4-pole C.O. 5-amp. switching.

EVERSHED BRIDGE MEGGERS (250 v.) Ex. Govt. Each one expertly overhauled and in perfect order. Range : Megger 0.50 megohms. Bridge 0.01 ohms to 1 megohm, shown in four dight windows with 10:1 and 100:1 multiplier and divider. With carrying case. £18 10 - (des. 4/6). This is an exceptional opportunity for these normally very expensive instruments.

SANGAMO SYNCHRONOUS DEVICES (All 200 250v. 50 c.) **RUNNING TIME METERS,** indicating to 9,999 hours, from 6 minutes. £5 5 -. **TIME SWITCHES,** capacity 20 amps. Model A, one on-off sequence per 24 hours, with day-omitting device. £5 5 -. Model C, three on-off sequences per 24 hours, with day-omitting device. £5 6 6. **SHORT INTERVAL PROCESS TIMERS,** cap. 5 amps., Sequence periods adjustable 5, 10, 15, 20, 30 and 60 mins., closed circuit period continuously adjustable 5-75 secs. for any of the sequence periods, £7 5 6. All above devices are in black plastic housing 3½in. × 3½in. Des. of any one, 1/6.

G.E.C. MINIATURE CRYSTAL CALIBRATORS. Continuation of this extremely popular offer. Operation 200/250 v. A.C. For frequency calibration in 100 Kc. steps from 100 Kc. to 40 Mcs. Modulation at 400 c/s. switched in if desired. Containing vacuum mounted crystal, basic 100 Kc. Accuracy 0.001% at 20 deg. C. Size 8½in. × 6½in. × 5½in. Complete and ready for use. Brand new 12 guinea instrument for £5 5 - nett (des. 2/-).

G.E.C. ONE-THIRD H.P. MOTORS 230/250 v. 50 c. 1 ph. Capacitor-Induction, ball-bearings, continuously rated, for mounting in any position. 1440 r.p.m. Brand new, in makers' individual packing cases. £6 18 6 (des. 3/-).

B.T.H. FRACTIONAL MOTORS 1/20th H.P. 220/250 v. A.C./D.C., ball bearings, continuously rated, series wound. 47 6 (des. 1/6). We have a few very fine U.S.A. Wagner ¼th H.P. Motors, 110 v. A.C. 1 ph. 1,440 r.p.m. at 50 c.) new, clearing at only £3 15 - each (des. 2/-).

SLIDING DIMMERS, for controlling stated lighting load from full-bright to blackout at 220/240 volts. Fully enclosed. 100-watts 36 -, 200-watts 42 -, 500-watts 55 - (des. 2/6).

Rail despatch charges relate to England and Wales only.

M. R. SUPPLIES Ltd. 68 New Oxford Street, London, W.C.1

Telephone MUSeum 2958

The ERIE* 531

for split-second assembly

A push with the finger and it's fixed!—and it's equally simple in design. Comprising only four parts, a combined mounting and earthing terminal, an adjustable inner electrode, a combined outer electrode and terminal and a moulded dielectric, yet it has all the essential requirements of a high frequency trimmer and compares more than favourably with articles of far greater complexity. Its capacitance change from maximum to minimum is practically linear, a feature which greatly assists production line adjustment and, despite its open construction, the 531 Trimmer has high resistance to tropical exposure.

RANGE (MOUNTED)	: 1 to 8 PF and 0·5 to 5 PF
RATED WORKING VOLTAGE	: 500 volts D.C
POWER FACTOR	: Not greater than 0·12%
INSULATION RESISTANCE	: 10,000 megohms minimum
MAX. OPERATING TEMP.	: 75° C



*Registered Trade Marks

ERIE* Resistor Ltd

CARLISLE ROAD, THE HYDE, LONDON, N.W.9. Tel.: COLindale 8011. Factories: London and Great Yarmouth; Toronto, Canada; Erie, Pa., U.S.A.

UNIQUE OFFER OF TECHNICAL GUIDANCE

Such have been the advances made recently in the design of high-fidelity equipment—amplifiers, multi-speed motors, pickups, loudspeakers, speaker cabinets, tape-recorders, etc.—coupled with the recent revolution in disc-record manufacture (Long Playing), that music-lovers who are anxious to go in for Quality Reproduction or to modernise existing equipment may feel uncertain which of the various makes and models will best suit their needs and existing equipment—and pocket.

WE OFFER TO ALL those thus placed the benefit, free of charge, of EXPERT TECHNICAL ADVICE on the equipment most suited to their needs. Our Chief Engineer is available to callers from 9 a.m. to 5.30 p.m. daily including Saturdays. IT WILL PAY YOU, from every point of view, to consult us before spending good money on the above items. If you cannot call, please write for CATALOGUE (and advice if required). We quote a few of our standard lines as follows:

N.R.S. "SYMPHONY" AMPLIFIERS, fitted with the patent "three-channel system" giving independent control of Bass, Middle and Top, thus affording the maximum possible control of tone and compensation for recording deficiencies. Especially essential when mixing the playing of old and new 78s with the new LP records. Scratch control and negative-feedback also incorporated. Woden transformers. 5-watt model only **10 gns.** 10-watt model (push-pull triodes), **15 gns.** Carr. 5/-.

N.R.S. No. 2 P.A. AMPLIFIER, 12-watts output. Radio Gram./Mike input, separate volume controls for fading in and out. Woden power components, price **£11.19.6.** Carr. 5/-. Hammer-finish steel portable case, if required, **42/-** extra.

AC DC QUALITY AMPLIFIER for P.A. or Domestic use. Extremely fine quality manufacture by REES MACE. Radio Gram./Mike inputs. 8 watts undistorted output matched to 15 ohms, 6 valves, mu-metal screened mike transformer built-in, tone control, housed in attractive dove-grey steel portable case, circuit fully fused. Brand new and fully guaranteed. Our special offer, **15 gns.** (List 24 gns.). Ins., carriage 5/-.

HIGH-FIDELITY SPEAKERS still available without Purchase Tax: Wharfedale Bronze 8in., **48/-**; Super 8 CSAL, **100/-**; Bronze 10in., **69/6**; Golden 10in., **115/-**; W10 CSB, **185/-**; W12 CS, **195/-**. Vitavox K12/10, **£8.10/-**; Grampian 12in., 10 watt, **£7.**

GARRARD 3-SPEED GRAM UNITS with pickup arm and complete with two Decca latest type XMS high-fidelity Magnetic Heads. Special offer, **£12.**

GARRARD 3-SPEED AUTOCHANGER, model RC72A WITH NEW TYPE LONG ARM for better tracking and two separate Decca XMS heads (not to be confused with autochangers with turnover pickups). Price **£10.15/-**. Or fitted with the Acos GP19 and GP19LP hi-fi crystal heads, **£17/10/-**. Carr. 5/-. Limited number only.

COLLARO 3-SPEED GRAM UNIT with autostop and pickup arm on unit plate, **£8/4/-**.

COLLARO SINGLE-SPEED AUTOCHANGER, plays nine 10in. or 12in. records, **£9.17.4.**

COLLARO THREE-SPEED AUTOCHANGER, as above but for 33⅓, 45 and 78 r.p.m., **£12.8.2.** **COLLARO 3-SPEED MIXER CHANGER, £14.19.2.**

COLLARO PICKUP HEADS to suit above Gram Units and Autochangers: Standard Magnetic, **39.5**; High-Fidelity Magnetic (78 r.p.m. only), **46/-**; GP27 incorporating Acos GP high-fidelity crystal cartridge and permanent sapphire needle (Std., L.P. or Dual-Purpose), **62/4.**

DECCA 3-SPEED GRAM UNIT. Model GU4A incorporating selected motor and turntable cushion-mounted on brown crackle unit plate with XMS pickup arm to take latest type 3-pin plug-in pickup heads. Unit supplied with springs for floating metal plate on wooden motorboard. Our special offer: **£8**, or complete with two Decca XMS Heads, **£12**, or with Acos GP19 and GP19LP, **£11/10/-**.

B.S.R. MU10 GRAM MOTOR for 33⅓ or 78 r.p.m., **£3.17.6**; model MU14 as above but for 33⅓, 45 and 78 instantly switchable, **£6.8.6.** Both motors complete with turntable, rubber mat and fixing screws.

ACOS GP 20 PICKUPS, with long white-ivorine arm and either Std. or L.P. head, **£3.11.3**, or with both heads, **£5.14.9.**

COMPLETE RECORD PLAYERS, single-record and autochange. Send for catalogue giving details of our nine different models including all popular combinations of pickup, motor and cabinet.

RECORD PLAYER CABINETS, 15½in. wide x 13½in. back to front x 6½in. high, ex-Manufacturer, motorboard cut for Decca motor, finished in brown rexine with carrying handle and hasps. While they last only, **39/6.** Also similar cabinet but 1in. extra height, **50/-**. Uncut, extra thick motorboards to fit above cabinets, **7/6.**

MICROGRAM CABINETS, ex-manufacturer, brown rexine, carrying handle, room for 3- to 4-watt amplifier, single record gram unit and fitted baffle for 6½in. speaker, attractive gold speaker grille at front. While they last, **55/-**.

BASS REFLEX CABINET KITS, 30in. high, consist of fully cut patent acoustic non-resonant timber, deflector-plate, felt, all screws, etc., and full instructions. 8in. speaker model 15in. wide x 12in. deep, **85/-**; 10in. speaker model (larger), **97/6**; 12in. speaker model (larger), **107/6.** Carr. 7/6. Ready built, 7/6 extra.

NORTHERN RADIO SERVICES

16 Kings College Road, London, N.W.3

Phone: PRImrose 8314

Tubes: Swiss Cottage and Chalk Farm.

* 10 WATTS PUSH-PULL HIGH FIDELITY OUTPUT.
** 2 TRACKS PER TAPE (2 Hrs. RECORDING).
*** 3 TAPE SPEEDS, 3¾in., 7½in. and 15in. per second.
**** 3 INPUTS: CRYSTAL AND M.C. MICS. AND GRAM.
***** 2 SEPARATE INPUT CONTROLS FOR "MIXING"
****** COMPLETELY AUTOMATIC ELECTRONIC ERASE.
******* DETACHABLE SPEAKER UNIT WITH LEAD.
******** FAST RE-WIND AND FORWARD WIND-ON.
********* CAN BE USED FOR PUBLIC ADDRESS, etc.

Measuring only 15½" x 10" x 12½". Versatile with High Quality Reproduction.

59 GNS. Suitable Microphones from **6 GNS.**

The complete Tape Mechanism as above **£25.**

DEMONSTRATIONS OR ILLUSTRATED BROCHURE FROM

ASSOCIATED CINE EQUIPMENTS LTD

353, BEXLEY ROAD, ERITH, KENT. Phone: Erith 2543.

SENSITIVE PANEL MOUNTING METERS



SIZE	2½"	3½"	5"
RANGE	25μA to 50A	15μA to 50A	15μA to 50A

S.50 types microammeters are stocked by M.R. Supplies Ltd. at 68, New Oxford Street, W.C.1

All sizes available with MIRROR SCALE 1st Grade Accuracy.

Available for delivery ex stock—
Universal Test Sets 1,000 and 20,000 Ohms/Volt.

BRITISH PHYSICAL LABORATORIES

HOUSEBOAT WORKS · RADLETT · HERTS

Telephone: RADLETT 5674-5-6

• THREE SPEED
• MIXED RECORD
• AUTO CHANGER

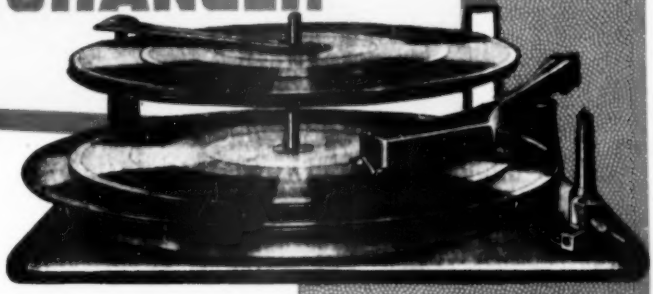

MONARCH

Never before has there been a record changer equal to the B.S.R. Monarch, which without doubt gives tremendous sales appeal to any instrument in which it is mounted. It includes all features demanded by the discriminating listener and has a styling and colour that will blend with any cabinet design.

Simplicity of design guarantees long life and trouble-free operation. The controls consist of one knob only, no levers to adjust, no loose fitments, no confusing adjustments for playing the increasingly popular 7" L.P. records.

A brilliant new three diameter selector enables different diameter records to be played automatically. The machine thinks for you by automatically adjusting itself for all three diameters.

Quality of reproduction is unequalled due to the outstanding performance of the latest B.S.R. reversible pick-up cartridge with two sapphire styli for standard and long playing records.

MU14

OUTSTANDING FEATURES

- Automatically selects and plays 12", 10", and 7" records, *mixed in any order* at 33⅓, 45, or 78 R.P.M.
- Changer automatically stops after last record, motor is switched off and pick-up is returned to rest position.
- Carefully designed to reduce moving parts to the very minimum, giving long trouble-free life.
- New turn over pick-up has extended range up to 10,000 c.p.s. Self compensated accurately for the L.P. lower frequencies with the Turnover frequency at the correct point. Compliant enough to take the lowest frequencies.
- Operates on 100/125—200/250 volts, 50 cycles, A.C. mains. Models available for 60 cycles A.C. mains.

Careful design allows us to deliver this unrivalled unit anywhere in the world at competitive prices.

REGENT

BSR

Birmingham Sound Reproducers Ltd., Old Hill, Staffs. Grams: 'Electronic Old Hill, Cradley Heath.'

ARGENTINE
AUSTRALIA
BELGIUM
BRAZIL
BRITISH W.I.
BURMA
CANADA
CEYLON
CYPRUS
CZECHOSLOVAKIA
DENMARK
EIRE
FRANCE
HOLLAND
INDIA
IRAQ
ISRAEL
ITALY
MALAYA
NETH. W.I.
NEW GUINEA
NEW ZEALAND
NIGERIA
NORWAY
PAKISTAN
POLAND
PORTUGAL
RUSSIA
S. AFRICA
SPAIN
SWEDEN
SWITZERLAND
U.S.A.
VENEZUELA

Furzehill

stars in 34 countries

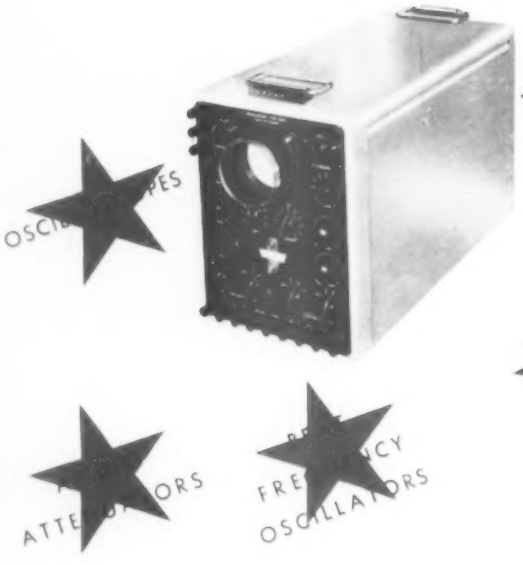

Immediate delivery for all export orders.

You are invited to write for export prices and a copy of our latest catalogue giving full technical details.

FURZEHILL LABORATORIES LTD.
BOREHAMWOOD — HERTS — ENGLAND

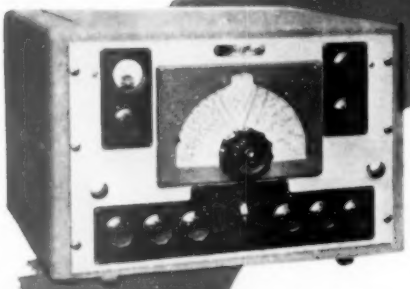

REDIFON R50M
Supreme, world-wide, communications receiver for civil, military, naval, aeronautical, meteorological, and other services.

★ ★ ★

Redifon

LINKS

Nation to Nation • Town to Town
Village to Village • Ship to Shore
Ground to Aircraft

Radio Telegraph. Telephone and frequency shift Teleprinter: high, medium and low power Transmitters: Communications and Diversity Receivers.

★ ★ ★

REDIFON LIMITED

Aviation Communications Division

BROOMHILL ROAD
LONDON, S.W.18
ENGLAND

REDIFON G67
2½ kW Channelised H.F. Transmitter, designed for general purpose long distance communications.

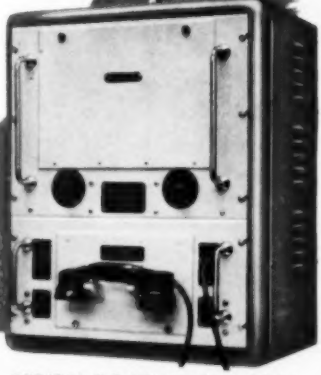

REDIFON G.R.49D Equally suitable for fixed, transportable and mobile installations. The G.R.49D. is a complete transmitting and receiving station providing both Telephony and C.W. Services.

Examples of

MODERN CAPACITOR ENGINEERING

DUBILIER
CAPACITORS

incorporate all the essential features required in modern radio and electronic practice

Details of the complete range of Capacitors manufactured by Dubilier are available on request

DUBILIER CONDENSER CO. (1925) LTD., DUCON WORKS, VICTORIA RD., NORTH ACTON, W.3
Telephone: Acorn 2241 (5 lines) Telegrams: Hivoltcon, Wesphone, London
Cables: Hivoltcon, London. Marconi International Code.

D.71

Telephone link by Radio

The type VMS Broadband V.H.F. radio equipment has been designed to overcome the tele-communications problem existing in areas where the provision of landlines for trunk communications is impracticable or uneconomical.

Operating in the V.H.F. band, the system caters for the transmission of up to 36 telephone channels to C.C.I.F. standards. When used in conjunction with VMR repeater equipment links up to several hundred miles in length can be established.

VMS/VMR equipment has been planned on the basis of maximum accessibility to simplify maintenance; the sub-unit construction employed facilitates fault localisation, and permits the rapid replacement of defective units by semi-skilled staff.

A.T.M. engineers are always prepared to study your problems, and to recommend the most suitable equipment for your complete system from the comprehensive range of A.T.M. products, which includes channelling equipment of all types and other essential V.H.F. radio items, such as aerials, filters, automatic changeover gear, towers and feeder cables. In addition, specially equipped teams are available to conduct field surveys in any part of the world to ascertain the most suitable equipment and station sites for any project.

AUTOMATIC TELEPHONE & ELECTRIC CO. LTD.

R. & T. Division, STROWGER HOUSE, ARUNDEL STREET, LONDON, W.C.2

Telephone: TEMple Bar 9262 • Cablegrams: STROWGEREX, LONDON

ATE4251-B107

—towards perfection—

LOWTHER MASTER CONTROL UNIT

Designed to meet the needs of the Audiophile.

COMPACT, ROBUST, ACCURATELY CALIBRATED UNIT, INCORPORATING:-

(1) Top "roll off" control, 3 position.

(2) "Roll off" rate control.

(3) Selector :—Mike—Record or Radio input, with a choice of four compensation circuits for :—78 and L.P. recordings.

(4 & 5) Full and independent Bass and Treble lift and cut controls.

(6) Gain control for Mike and Records—Radio input pre-set control.

IDEAL FOR WILLIAMSON OR OTHER HIGH QUALITY AMPLIFIER

Leaflet sent upon Request

AT LAST! A VERSATILE UNIT TO MEET MODERN REQUIREMENTS.

THE LOWTHER MANUFACTURING COMPANY,
Lowther House, St. Mark's Rd., Bromley, Kent
Telephone : RAVensbourne 5225

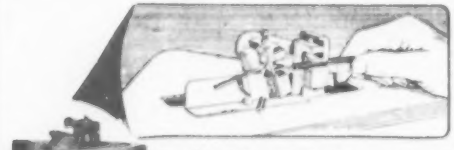

Speedy and Accurate

FOOT-OPERATED

WIRE STRIPPER

Ideal for production work on most types of insulated wires and small flexible cables up to ¼" outside diameter. Hyde Stripping Machines are cutting the costs and speeding the production of many world-famous manufacturers. Send samples of wires or cables used, for full report.

For cables up to ½" outside diameter having solid or inflexible conductors, ask for details of the Hyde BENCH TYPE Cable Stripper, which has straight on parallel action.

We Distributors, Stockists and Demonstrators

BUCK & HICKMAN LTD.

LONDON: 2, 4 & 6 Whitechapel Road, E.1
ALPERTON: 264 Water Road, Abbey Estate
BIRMINGHAM: 29/32 Whittall Street, 4
MANCHESTER: Adair Street, 1. (P.O. Box 148)
GLASGOW: 49 Robertson Street, C.2.

Advertisement of E. B. Hyde & Co. Ltd., Wythenshawe, Manchester



S.G.Brown

"F"
TYPE
HEADPHONES

for LONG LIFE and
TROUBLE-FREE SERVICE

This is a featherweight model of exceptionally strong construction and high sensitivity. It appeals equally to both amateur and professional radio engineers. It incorporates powerful cobalt steel magnets with flat Stalloy diaphragms.

D.C. Resistance: 4,000 ohms.

Impedance: 14,000 ohms at 1,000 c/s.

For full details of other models in the wide S. G. Brown range please write for Illustrated brochure "W".

S.G. Brown Ltd.
SHAKESPEARE ST., WATFORD, HERTS.
Telephone: Watford 7241

This is Britain's famous power amplifying tube ... for years the favorite tube of experimenters and research laboratories, acknowledged in every country of the world to be the finest tetrode ever made. It is currently used in the Leak, Williamson, Radio Craftsmen and other fine amplifiers.
The KT66 is a versatile power tetrode with a number of useful applications. It may be used in the output stage of an audio-frequency power amplifier, either tetrode-connected for maximum sensitivity and power output or triode-connected for high quality working. In transmitting circuits using frequencies up to 30 Mc/s it may also be used as an oscillator or as a radio frequency amplifier.
A high slope, indirectly heated beam tetrode, the KT66 is suitable for either single or push-pull audio operation and may be employed as a beam tetrode with aligned grids. This alignment of the grids reduces losses in the screen and makes for the highest possible power conversion efficiency. With this system of construction high orders of power output may be obtained with a low screen dissipation, and the anode is designed to dissipate 25 watts continuously with a reliable life performance.
THE FINEST AUDIO TUBE EVER MADE!
KT66
OSRAM
DIMENSIONS
7-PIN "OCTAL"
Pin 1: Not connected
2: Heater
3: Anode
4: Screen Grid, g2
5: Control Grid, g1
6: Omitted
7: Heater
8: Cathode
View looking on underside of base.
All dimensions are in mm. and are the maximum except where otherwise stated.
RATINGS
Tetrode connected
Triode connected
Heater Voltage
Heater Current 6.3 6.3
OPERATING CONDITIONS
Single Valve A.F. Amplifier
Tetrode connected
Triode connected
Anode and Screen Voltage 250 400 250 volts
Bias Voltage -15 -38 -19 volts
Anode Current 85 63 60 mA
Screen Current 6.3 — — mA
Input Voltage 15 38 19 volts peak
Bias Resistance 160 600 315 ohms.
Anode Load Resistance 2200 4500 2750 ohms.
Distortion 9 7 6 %
Power Output 7·25 5·8 2·2 watts
Two Valves Push-Pull, A.F. Amplifier.
Tetrode connected, Auto Bias.
(Data per pair of valves unless otherwise stated.)
Anode Voltage

THE FAMOUS KT66 . . . IN USE ALL OVER AMERICA AND ACKNOWLEDGED TO BE THE FINEST BEAM TETRODE EVER MADE

IS AN Osram VALVE MADE IN ENGLAND

The photographic reproduction is taken from literature published in America by the British Industries Corporation and gives an entirely unsolicited tribute to this fine valve.

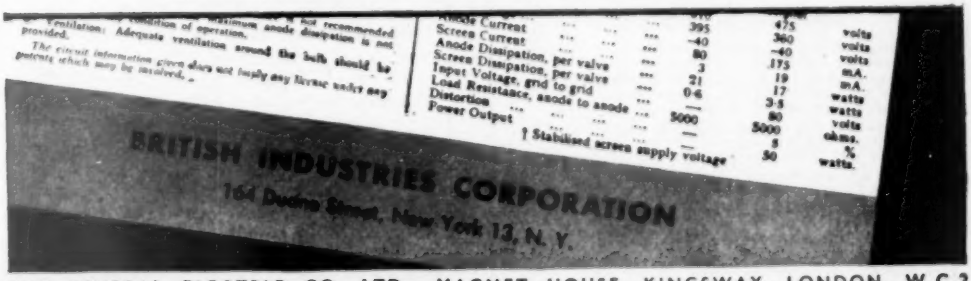
Anode Current 395 475 volts
Screen Current -40 360 volts
Anode Dissipation, per valve 80 -40 volts
Screen Dissipation, per valve 3 17.5 mA.
Input Voltage, grid to grid 21 19 mA.
Load Resistance, anode to anode 0·6 17 watts
Distortion — 3·5 watts
Power Output 5000 80 volts
— 5000 ohms.
— 5 %
† Stabilised screen supply voltage 50 watts.
BRITISH INDUSTRIES CORPORATION
Duane Street, New York 13, N. Y.

THE GENERAL ELECTRIC CO. LTD., MAGNET HOUSE, KINGSWAY, LONDON, W.C.2

THE FIRST

THE Soundmirror

MAGNETIC TAPE RECORDER

AND FOREMOST

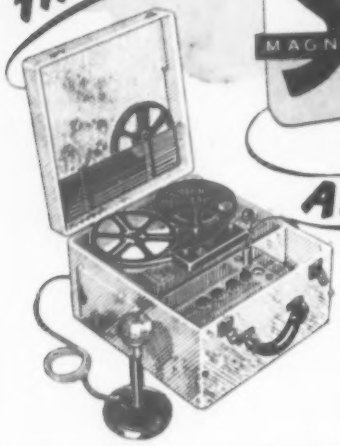

A self-contained recorder-reproducer giving a faultless performance. The ideal equipment for HOME ENTERTAINMENT, PUBLIC ADDRESS, CONFERENCE RECORDING, and SOUND COMMENTARY for SILENT FILM PROJECTORS.

- **"Finger Tip" operation—one control provides for "Record"—"Play" "Rewind" or "Fast Forward" requirements.**
- **Constant Tape Speed—7.5 inches per second.**
- **Frequency Response—Essentially flat from 100-7500 c.p.s.**
- **High Quality Push-Pull Output.**
- **Recording Duration 30 minutes per reel.**
- **Dynamic Range approximately 40 decibels.**
- **Power Supply 200/250 A.C. 50 cycles—Consumption 80 watts.**

Now available in England—the book "Magnetic Recording" by Dr. S. J. Begun. A comprehensive treatise. Price 25/-, postage 9d. extra.

THERMIONIC PRODUCTS LTD.

Division S M WW, HYTHE, SOUTHAMPTON. Phone: Hythe 3365

London Showrooms: Morris House, Jermyn Street, Haymarket, S.W.1. Phone: Whitehall 6422

MODELS AVAILABLE FROM £69-10-0

Sales and Service Centres: Birmingham - Bristol - Manchester - Leeds - Newcastle and Glasgow

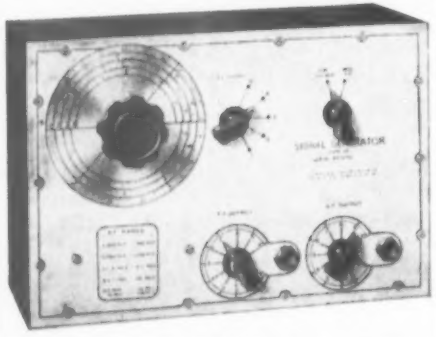

SIGNAL GENERATOR TYPE 10. 100 Kc/s-100 Mc/s

Price £7 . 10 . 0

The accuracy, reliability and comprehensive specification, are some of the reasons why the TYPE 10 has achieved such outstanding success.

● 100 Kc/s to 100 Mc/s ● Modulated or unmodulated carrier ● Direct calibration ● Adjustable 400 c.p.s., AF signal ● Stable RF oscillator Large, easily read scale ● AC mains operation.

New instruments now available include the HOMELAB CHECKTEST price 37/6d., and a range of accurately calibrated variable condensers, 100pf., 500pf., and 1000pf., price 42/- each.

Obtainable only direct from the manufacturers. Send for full technical details or call at address below.

HOMELAB INSTRUMENTS LTD.,

68a, COBDEN ROAD, LONDON, E.11

Telephone: LEY 5651

WE PAY TOP PRICES

For American Surplus Electronic Equipment

Any quantity or condition

LOOK AT THESE EXAMPLES

for equipment in good condition

Receiver R54/APR4 with tuning units TN16, 17, 18, 19 (or bought separately)	£110
Receiver AR88D	£55
Frequency Meter TS/175	£80
TX/RXRT18/ARC1	£50

We pay similar Remarkable Prices for

Receivers APR1, APR4, APR5, R5/ARN7, BC348, BC342, BC312, R78/APS15, R28/ARC5

Frequency Meters BC221, TS174/U

Test Sets TS3, TS13, TS14, TS17, TS19, TS33, TS34, TS45, TS47, TS59, TS69, TS102, TS118, IE19

Transmitters ART13, SCR522, TRC1, TSC6-12-13, SCR300, BC1000

Synchronisers BC1148 **Modulators** BC1142

Phone us immediately, transfer charge

ALTHAM RADIO CO.

BRAZENNOSE STREET, MANCHESTER 2

Tel.: DEAnsgate 5387

FAST RELIABLE SERVICING!

TYPE L 33

For fast, reliable servicing Hunts provide the widest range of replacement capacitors, including Electrolytics, Metallised Paper, Foil and Paper, Stacked and Silvered Micas, etc. Illustrated is the standard cylindrical aluminium cased electrolytic fixed by an external mounting clip. This type is used extensively by the leading Radio and Television equipment manufacturers. The range shown below is a small example of the wide variety of types available for speedy delivery. Stocked by all leading wholesalers.

List No.	Cap. µF	Max. D.C. Wkg. Volts	Max. Surge Volts	Max. Ripple Current m/a	Type ref:	Dimensions L.	Dimensions D.	List Price s.	List Price d.
K14	500	12	15	–	L32	2½	1⅛	8	6
K15	1000	12	15	–	L32	3	1⅛	11	0
K122	100	150	175	250	L32	2½	1⅛	9	6
K20	32	350	400	225	L32	2½	1⅛	6	9
K21	16+24	350	400	150	L33	2½	1⅛	8	6
K49	32+32	350	400	225	L33	3	1⅛	11	6
K6	8	450	525	200	L32	2½	1⅛	4	9
K7	16	450	525	300	L32	4½	1⅛	6	6
K30	32	450	525	300	L32	2½	1⅛	8	6
K9	8+8	450	525	200	L33	4½	1⅛	8	0
K10	8+16	450	525	200	L33	4½	1⅛	9	6
K64	16+8	450	525	175	L33	2½	1⅛	8	6
K11	16+16	450	525	300	L33	4½	1⅛	11	0
K61	16+32	450	525	175	L33	4½	1⅛	12	6
K41	32+32	450	525	300	L33	4½	1⅛	15	0
K54	8+8	500	570	200	L33	4½	1⅛	9	6

Note: With all dual units the ripple current figure applies only to the first, or reservoir section.

REGISTERED TRADE MARK

HUNTS CAPACITORS

THE TRADE MARK OF RELIABILITY

A. H. HUNT (Capacitors) LTD.
WANDSWORTH
LONDON, S.W.18
Telephone: BATtersea 3131
Established 1901

Two outstanding advantages . .

• This bridge not only measures balanced or unbalanced impedances with equal facility, but also has the merit of extremely low impedances looking back into the terminals and from the terminals to ground. It provides, at radio frequencies, the range, flexibility and stability of an audio-frequency impedance bridge and, having a neutral terminal available, it permits the measurement of three-terminal networks. A high degree of accuracy is maintained throughout the full frequency range.

R.F. BRIDGE B 601 — 15 Kc/s. to 5 Mc/s.

Capacity: 0·01 pf. to 20,000 pf. in five ranges.
Resistance: 10 ohms to 10 megohms—6 ranges.
Inductance values which will resonate the above capacities between 15 Kc/s and 5 Mc/s.
Direct reading accuracy is constant to within 1% up to 1 Mc/s and may fall to 2% at 5 Mc/s.

Wayne Kerr

THE WAYNE KERR LABORATORIES LTD., NEW MALDEN, SURREY · MALDEN 2202

HANNEY of BATH offers

EDDYSTONE 740 RECEIVERS, now available again at £38 15 -. Illustrated folder on request.

SPEAKERS AT THE OLD TAX FREE RATE. Goodmans Axiom 150, £10 5 6; Audiom 60, £8 12 6; Rola G12, £8 5 -; (all 13 ohm). W.B. Stentorian, 2/10, 18 6; 3/10, 19 6; 3/8, 21 -; 6/8, 24 6; 8/8, 32 6; 9/8, 36 9; 10/8, 44 6; 10/8 Concentric Duplex, 135 -. Goodmans 5/8, 21 -; Rola Celestion type 44, 12/8, 84 - (all 3 ohm).

WILLIAMSON AMPLIFIER. Resistor-pot kits for main amplifier, 33 9; Fig. 11, 9 6; Fig. 13, 24 -; Fig. 19, 37 -; Fig. 37, 9 6; Fig. 39, 24 6. Condenser kits, Fig. 13, 13 -; Fig. 15, 47 -; Fig. 19, 54 6; Fig. 37, 19 -; Fig. 39, 54 -. 10 1% silver micas 15 -; 15 -, 7 -; 5 bank 6 pos. switch, 9 6; 4PDT genuine oak switches, 4 4; DPDT, 4 8; TCC 8 mfd. 600 v. electrolytics, 15 -; 25 mfd. 500 v. metalpacks 2 10; 65 ditto, 2 1; Colvern CLR901 3 watt 100 ohm pots, 3 4 each. Matched pair KT66 valves, 50 2; L63, 14 4; KF35, 25 1; 5/8KC, 21 6. 14 + 10 + 3 super cast aluminium chassis, 27 6. Also all goods available as per Sept. advert.

VIEWMASTER. Everything available for immediate despatch, from one resistor or condenser to a complete kit. Complete kit less valves and tube, all channels, £31. Stage 1, 61 -; Stage 2, 42 9; Stage 3, £5 1 8; Stage 4, 9 10; Stage 5, £10 4 -; Stage 6, £7 5 9; Stage 7, 58 -. Single items as follows: WB100, 18 6; WB101, 6 -; WB102, 18 6; WB103, 42 -; WB103A, 52 6; WB104, 15 6; WB105, 32 6; WB106, 25 6; WB107, 32 6; WB108, 33 3; WB109/1 or 2, 22 6; WB110, 10 -; WB111, 5 9; WB112 6in., 21 -, or 12in., 21 6. Consol conversion kits, 35 -. WB300 pre-amp chassis, 17 6. Westinghouse rectifiers, Kit, 60 -; 360HT100, 29 5; 360HT60, 26 1; 360HT45, 23 8; 14A86, 20 4; 14D96, 11 7; WX3 and WX6, 3 9. Wearite coils and choke all channels, 30 -; TCC condensers, £7 7 -; Colvern, 22 6, or singly: CLR901, 3 3; CLR 4089/22, 6 4. Morganite Q pots 5 - each. Morganite resistor kits, 35 3; Bulgin kit, 15 -; .001 CP5002 condensers, 4 6; CP5A01, 7 6; 2 CP4N, 3 -; 500 pfd miradics, 1 6; Wearite pre-amp coils, 4 - pair.

"WIRELESS WORLD" TV SUPERHET. Everything still available. See our Sept. advert.

CATHODE RAY TUBES. We pay carriage and guarantee safe delivery. 9in. Brimar C9B, £14 16 5 (A); G.E.C. 9304A, £14 16 5 (A); Mazda CRM92, £13 13 7; Mullard MW22-16, 17 or 18, £13 13 7. 12in. Brimar C12B, £19 7 8 (A); G.E.C. 12/50, £19 7 8 (A); Mazda CRM121A or B, £19 4 10; Mazda CRM172, £20 10 5 (A); Mullard MW31-16, 17 or 18, £18 4 10 (A) Aluminised. 14in. Brimar C14BM (rectangular), £20 19 10; Mullard MW36-22, £21 5 8. 16in. Mullard MW41-1, £24 6 5; Projection Mullard MW6-2, £9 2 5. Ion traps for Mullard MW31-16 and MW22-16 tubes, 5 -.

Send 6d. stamp for our comprehensive lists which contain details of Viewmaster, E.E. TV, W.W. TV 5-Set, Tele-King, Williamson Amplifier, SOUNDMASTER Tape-recorder (by Viewmaster), and General Components. Please add 9d. postage on orders under £2. 2 - is added to C.O.D. orders under £5 (minimum C.O.D. order £1).

L. F. HANNEY

77 Lower Bristol Road, Bath. Tel. 3811.

Introducing . . . .

Newtec Components
TRADE MARK

for the Radio & Electronic Instrument Industries

Group Boards and Mounting Strips

Miniature Component Mounting System

High Voltage Mounting Strips

Precision Instrument Cases from Stock or to Specification.

Send for illustrated literature to the Component Division,

JOYCE, LOEBL & CO. LTD.,

Vine Lane, Newcastle upon Tyne, 1

PREMIER RADIO Company

(REGD.) RADIO

E. H. MORRIS & CO. (RADIO) LTD.
Please quote Dept. W.W.

ESTAB. 40 YRS. TELEVISION

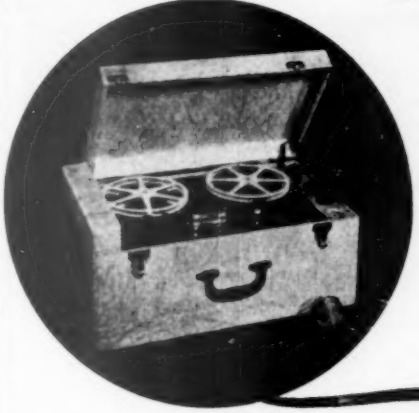

Now being delivered...

THE PREMIER De Luxe PORTABLE MAGNETIC TAPE RECORDER

THIS UNIT COMPARES MORE THAN FAVOURABLY WITH ANY OTHER MAKE OF TAPE RECORDER AT DOUBLE THE PRICE

The 7 VALVE AMPLIFIER has been specially designed for high quality reproduction.

Brief Specification :—

VALVE LINE-UP :—EF37A First Stage; 6BL7 Second Stage and Tone Control; 6V6 Output; 6X5 Rectifier; VT501 Bias and Erase Oscillator; 7193 Record Level Amplifier; 6U5 Magic Eye Record Level Indicator.

OUTPUT :—4 Watts.

CONTROLS :—Volume; Record/Playback Switch; Treble Boost; Bass Boost—on/off.

A VISUAL MAGIC EYE Record Level Indicator is incorporated.

The unit is housed in a superbly finished portable cabinet which incorporates a compartment for the Microphone when not in use. Weight complete 35 lb. Dimensions :— 21in. long; 12½in. deep; 9¼in. high.

The **PREMIER** Recorder incorporates the **NEW LANE TAPE TABLE.**

Brief Specification :—

Made to high standards and incorporating features ensuring low level of "Wow" and "Flutter" throughout the full length of tape.

FAST REWIND. Provision for fast rewind and forward run in less than 1 min. in either direction. THREE MOTORS obviating friction drive.

HIGH FIDELITY RECORD PLAYBACK (1 HOUR APPROX. PLAYING). The Table is fitted with high fidelity record play-back head of new design wound to high impedance and a separate A.C. Erase Head. The Heads are half track size allowing approx. 1 hr. playing from standard 1,200ft. Reel of Tape.

TAPE SPEED 7½in. sec.
For use on A.C. 200/250, 50 cycles mains only.

This Recording Outfit has been designed for use with M.C.-I-111 "SCOTCH BOY" Magnetic Tape. With this high quality tape a frequency range of 50 c.p.s. to 9,000 c.p.s. at tape speed of 7½in. sec. can be readily achieved.

Additional reels of 1,200 ft, can be supplied at 35/-.

To those not wishing to purchase the complete Recorder, separate units are available as follows :

The built Amplifier complete with 8" Speaker. *Plus 7/6 Pkg. Car. Ins.* **£14.14.0**

Portable Cabinet *Plus 5/- Pkg. Car. Ins.* **£4.19.6**

The Lane Tape Table *Plus 7/6 Pkg. Car. Ins.* **£16.10.0**

For Microphones see below

39 GNS. *(Pkg. Carr. & Ins. -/6n)*

SUPPLIED COMPLETE WITH MICROPHONE REEL OF "SCOTCH BOY" TAPE AND REWIND SPOOL

PREMIER TABLE MODEL MAGNETIC TAPE RECORDER

IN KIT FORM.—The Kit includes ALL parts, valves, cabinet, loudspeaker, Reel of "Scotch Boy" Tape, Rewind Spool and The NEW Lane Tape Table already assembled, but excluding Microphone.

SPECIFICATION AS PREVIOUSLY ADVERTISED **£29 · 8 · 0** (Pk. and Carr. 15/-)

COMPLETE—to those unable to build this TAPE RECORDER, we offer it built, tested and ready to plug in, complete with Microphone, Reel of "Scotch Boy" Tape, and Rewind Spool.

SPECIFICATION AS PREVIOUSLY ADVERTISED **£36 · 10 · 0** (Pk. Carr. and Ins. 1 Gn.)

WORKING MODELS OF ALL THE ABOVE CAN BE SEEN AT THE ADDRESS BELOW

MICROPHONES
High Impedance

LUSTRAPHONE
Moving Coil
Stand Type £5 . 12 . 6
Hand Mike £6 . 6 . 0

RONETTE
Crystal Microphone
Ball Type £3 . 19 . 6
Torpedo Type £2 . 12 . 6

ROTHERMEL
Crystal Microphone
2D56 Type £2 . 19 . 6

Table Stands for all the above 17/6

THIS IS OUR ONLY ADDRESS

207 · EDGWARE ROAD · LONDON · W·2

TERMS OF BUSINESS:
Cash with order or C.O.D. over £1. Please add 1/- for Post Orders under 10/- (6d. under 40/- unless otherwise stated

Telephones: AMBassador 4033 PADdington 3271/2

PREMIER FOR SOUND RECORDING

PREMIER RADIO Company

(REGD.) ESTAB. 40 YRS.

S. H. MORRIS & CO. (RADIO) LTD.
Please quote Dept. W.W.

RADIO

TRANSMITTER RECEIVER TYPE TR9H



Consists of Transmitter type T1306 and Receiver R1130 in one case. This is a 9-valve Battery operated Unit covering 4.3 Mcs. to 7.6 Mcs. Crystal controlled complete with valves but less crystal, 50/-, plus 7/6 packing and postage.

EX-R.A.F. TRANSMITTER T1154 SERIES

A medium High Powered Transmitter for C.W. M.C.W. Frequency Ranges 1·6-2·3 Mcs., 3·5-4·5 Mcs., 800-2000 Kcs. 7 Mcs. Mechanism is arranged so that predetermined frequencies can be held or returned to. Complete with 4 valves—2-PT15 (push-pull to parallel) driven by an ML6 in a stabilised Hartley oscillatory circuit. A further ML6 valve provides a 1,200 cycle side tone to enable the operator to log his transmission on C.W. Price 39/6, plus 10/- Pkg. and Carr.

1124 RECEIVER UNIT

Range 30 to 40 Mcs. Contains six new Valves 5-SP6, 1-6J6, 1-1L5G (frequency changer), 1-4D1, 24 ceramic trimmers, 6 ceramic valve-holders, 6 valve screening cans, 20 resistors, 2 pot-meters, mica and tubular condensers, ceramic coil formers 5-way 4-bank switch with long spindle I.F. transformers, etc. Brand new in maker's carton at 22/6, plus 2/6 postage and packing.

★ *BRAND NEW*
R1155 RECEIVERS

In original cases, complete with 10 valves. Frequency range 18.5 Mcs.-75 Kcs. in 5 wave bands. £11.19.6 10/6 packing and carriage.

POWER SUPPLY UNIT

for above (incorporates output stage. Supplies an output of 250 volts at 80 mA., which is ample for the R1155 with the output stage. Jones plugs for connecting the Power Pack to the Receiver are included. The 6V6 output stage complete with Output Transformer and 6in. speaker is built into the unit. Price £5.5/-, plus 3/- packing and carriage.

As a special offer, power supply unit including speaker together with R1155 receiver, PRICE £16.19.6. *Plus 15/- pkg. & carr.*

★ *We now have available a small quantity of used R1155 Receivers. We can offer these at the ridiculously low price of £9.19.6, plus 10/- Pkg. Carr. Ins. These Receivers have been reconditioned and Air Tested and are fully guaranteed to be in perfect working order.*

FRACTIONAL H.P. MOTOR

A 50 v. 2-phase A.C. motor, 1/40th h.p. by famous maker. Supplied complete with resistor, condenser and circuit diagram to convert the motor to ¼ h.p. for use on 240 v. single phase A.C. mains. Brand new, 25/-, post 2/6 carriage and packing.

MAGNETIC MARCHING COMPASS

Luminous Dial, enclosed in black Bakelite case. Size: 3in. × 2¼in. × 1¼in.

Price 18/6.

METAL RECTIFIERS FULL WAVE

6 v. 1 amp., 4/-; 12 v. 1 amp., 5/-.
E.H.T. Pencil Type:
Output: 350 v. 1 m.A., 4/7 each; 1,000 v. 1½m.A., 6/- each.



BUILD A PROFESSIONAL LOOKING RADIO AT LESS THAN HALF TO-DAY'S PRICE

We can supply all the parts to help you.

Bakelite Cabinet (Brown or Ivory)	17/6
Packing and insurance	2/6
Punched chassis, 3-valve plus rectifier T.R.F.	3/9
Engraved Glass Dials, 180-550 and 800-2,200 m. With station names, new wavebands	1/6
T.R.F. Coils, 180-550, 800-2,200 metres, pair	6/6
Drum (3¼in. diam.)	1/6
Driving head	1/6
Double pointer	1/-
Spring	6d.
Nylon cord (yard)	6d.
Dial Front Plate	2/6

SEND 1/6 FOR EASY TO FOLLOW POINT-TO-POINT DIAGRAMS AND CIRCUIT DIAGRAM which shows how YOU can build the Receiver illustrated above.

THE COMPLETE KIT

to construct a 3-valve plus rectifier T.R.F. Receiver for use on 200/250 v. A.C. mains can be supplied at £6.9.6, plus 2/6 packing and carriage.

Each Kit is complete in every detail, nothing has to be made or improvised. Easy to follow, point-to-point diagrams are supplied, making construction very simple. The Dial is illuminated and the Receiver housed in a Bakelite Cabinet size 13in. × 8in. × 6in. presents an attractive appearance. The valve line-up is:

117A—H.F. Pentode. VR116—Detector.
APT4—Output, and Metal Rectifier.

Waveband coverage is for the medium and long bands. Choice of Walnut or Ivory coloured Cabinet.

AVAILABLE ONCE AGAIN!
A.C.R. 1 C.R. TUBES
(DIRECT REPLACEMENT FOR A.C.R. 2X)

9in. screen. 4 Volt Heater. This Electrostatic Tube is recommended as eminently suitable for Television. 15/- plus 2/6 Pkg. Carr. and Ins. *Data sheet supplied.*

V.C.R 97 C.R. TUBES

We are once again able to offer this famous tube with the usual PREMIER guarantee of a full screen picture free from cut-off. Every tube is television picture tested before despatch. £2.5.0 post paid.

PREMIER'S MOST SENSATIONAL OFFER
THE FAMOUS 'SOBELL' 4 VALVE SUPERHET TABLE RECEIVER



M. & L. WAVEBANDS

Valve Line-up: 1R5, 1S5A, 1A7, 3Q4.

Entirely transportable and unusually sensitive owing to special feed-back circuit employed. Housed in attractive plastic cabinet.

Choice of 5 Colours—Walnut, Pastel Peach, Ice Blue, Aero Green, Magenta. Carrying handle incorporated in design. For use on 200/250 A.C./D.C. mains.

£8.19.6 Plus 5/- Pkt. Carr./Ins.

Covered fully by Manufacturer's Guarantee

6v. MALLORY VIBRATOR POWER PACK

Complete with 6Z4 Rectifier Valve, input 6-8 v. output 300 v. at 90 m.A. The Unit is supplied with harness assembly incorporating fused battery leads, on-off switch and output plug. Price 42/6, plus 2/6 pkg. and carr.

BRAND NEW **R1355 RECEIVERS**

As specified for the "Jurgensen Television," complete with 11 valves, 39/6, plus 7/6 packing and carriage.

TELEVISION

SMITH'S 8-DAY AIRCRAFT CLOCKS

Luminous dial, can be supplied with trip hands as illustrated or with plain glass front, without trip hands. When ordering, please specify type required. Housed in strong black Bakelite casing. Panel mounting. Dimensions 3¼in. dia. dial. Fixing Panel 3¼in. sq. Protrudes 1⅛in. from back. Price 42/6. Plus 1/6 post pkg. ins.

2 STAGE QUALITY AMPLIFIER
Complete with 10in. Energised LOUDSPEAKER

4 watts output. A.C. 110/230 mains.

£6.19.6

plus 5/- carriage.

HEADPHONES

Balanced Armature Low Resistance
Type 1, 5/11 pair. Type 2, 8/11 pair.
High Resistance 12/6 pair.
Lightweight High Resistance
14/6 pair.

MAINS NOISE ELIMINATOR KIT

Two specially designed chokes with three smoothing condensers with circuit diagram. Cuts out all mains noise. Can be assembled inside existing receiver. 6/- complete.

CRYSTAL MICROPHONE

An entirely insulated crystal microphone which can be safely used on A.C./D.C. amplifiers. High impedance. No background noise, really natural tone. The ideal Mike for tape wire and disc recording and sound projectors. Price 22/6.

BATTERY CHARGER KITS

All incorporate metal rectifiers. Transformers are suitable for 200/250v. A.C. 50 cycle mains.

Cat. No.		
2002	Charges 6 volt accumulator at 1 amp. Resistance supplied to charge 2 v accumulator	£1.2.6
2003	Charges 12 volt accumulator at 1 amp.	£1.7.6

PREMIER 3-BAND COIL PACK

Consists of a wired and aligned Coil Pack of the most Modern Type incorporating such features as Air Dielectric Trimmers, Litz wound medium wave coils. Tuned R.F. stage, covers 13-14, 40-120, 200-557 metres. Dimensions of pack: 6in. × 4¼in. × 2¼in. Complete circuit is supplied. Price 25/-.

R3170A RECEIVER UNIT
Brand New and Unused

This is a 16-valve VHF Receiver incorporating a 30 Mc/s I.F. Strip. Valve line-up: 2-CV66, 1-VU39, 2-EA50, 1-CV138, 1-VR137, 1-VU134, 8-EF50 valves. Price £4.2.6, plus 5/- pkg. and carr.

12 v. POWER SUPPLY UNIT and L.F. AMPLIFIER



A 12 v. vibrator power pack and amplifier combined. Unit contains 12 v. Mallory vibrator with filter components 2 selenium metal rectifiers approximately 240 v. 30 mA. 1-ATP4 valve, various chokes transformers and a host of other useful components. Housed in a metal case measuring 11¼in. wide 6in. deep, 4in. high. Price 29/6, plus 5/- Pkg. & Carr.

POWER SUPPLY UNIT No. 7

Ref. ZA17571. A complete Unit for charging 6-volt Accumulators by hand. Designed for the WS-21 could be used for many other purposes. Consists of a sheet metal case, dim. 17 × 10½ × 7¼in., with detachable lid, containing hand driven generator, with gear mechanism which delivers 6 volts D.C. at 4 amps., also 6 volt cut-out and battery clamp. Price 32/6, plus 5/- post/pkg.

THIS IS OUR ONLY ADDRESS

207 · EDGWARE ROAD · LONDON · W.2

TERMS OF BUSINESS:
Cash with order or C.O.D. over £1. Please add 1/- for Post. Overseas orders 10% extra over £20 unless otherwise stated.

Telephones: AMBassador 4033 PADdington 3271/2

OPEN UNTIL 6PM ON SATURDAYS

IMPORTANT ANNOUNCEMENT WE CANNOT ACCEPT RESPONSIBILITY FOR, NOR CAN WE GUARANTEE ANY—

PREMIER RADIO Company

(REGD.) ESTAB. 40 YRS.

R. W. MORRIS & CO. (RADIO) LTD.

Please quote Dept. W.W.

RADIO

SOUND POWERED LOUD HAILER

Completely self-contained equipment by famous manufacturer. Consists of Microphone, Retractable Speaker Unit and Matching Transformer. On-off Indicator Lamp incorporated. The Unit is 12 v. battery operated and has no complicated switching arrangement. By depressing the "Press-to-talk" switch on the Microphone the Unit comes into immediate operation without preliminary warming-up period. Completely weatherproof. 4 watts output.

£7 . 19 . 6

(Excessive of Battery)

Plus 5/- Pkg. Carr.

Ideal as "Ship-to-Shore" equipment, for Workshop Open-air Meetings, etc. Suitable 12 v. batt., can be supplied at £5/10/-. *Plus 7/6 Pkg./Carr.*

H.T. ELIMINATOR AND TRICKLE CHARGER KIT

All parts to construct an eliminator to give an output of 120 volts at 20 mA., and 2 volts to charge an accumulator. Uses metal rectifier. **£2.**

CAR BATTERIES—*BRAND NEW*

6 v. 11 plate **PREMIER**
Hght. 6¼in., Lgth. 7¼in., Depth. 6¼in. Price **£5/-/-**

6 v. 15 plate **READING**
Hght. 7¼in., Lgth. 9¼in., Depth. 7¼in. Price **75/-/-**

6 v. 16 plate **DELCO-REMY.** Hght. 7¼in., Lgth. 9¼in. Depth. 7¼in. Price **97/6**

6 v. 23 plate **DELCO-REMY.** Hght. 9¼in., Lgth. 13¼in., Depth. 7¼in. Price **130/-/-**

12 v. 9 plate **PREMIER** Hght. 8¼in., Lgth. 12¼in., Depth. 6¼in. Price **110/-/-**

ALL PRICES PLUS 7/6 CARR. & PACKING

EX-U.S.A. U.H.F. AERIAL

with untuned detector stage, consisting of V.R.92 valve, etc. Brand new, in carton, 5/-.

SUPER QUALITY TELEVISION MAGNIFYING LENS

To suit 5in., 6in. or 7in. Tubes. Increase picture size considerably. **25/-** each.

CORRECT ASPECT WHITE RUBBER MASKS

For 12in. Round or Flat-faced Tube **16/11**

WHITE RUBBER MASKS For 6in. Tube, **8/6.**

THE COLLARO 3RC511 3-SPEED AUTOMATIC RECORD CHANGER

A new large purchase enables us to offer these fine Motor Units at **NEW LOW PRICES** which are approximately 25% off the current list prices. Designed for simplicity and reliability at low cost. The Pick-up can be moved to any position whilst the machine is stationary or raised without interfering with the mechanism. It is impossible to jam the mechanism and it should never go out of adjustment. The machine will play either 9-10in. or 9-12in. records not intermixed. The Motor is suitable only for A.C. supplies of 100/125 volts or 200/250 volts at a frequency of 50 cycles per second. The unit is supplied complete with the latest plug-in type Dual purpose Crystal Head, fitted with a **Permanent Sapphire Stylus**, and is suitable for use with either long-playing or standard recordings. All Pick-ups are fitted with a twin ballrace Pick-up base thus ensuring perfect freedom of movement. The Motor Plate is finished throughout in a special hammer finish and is virtually scratch proof. The complete Unit occupies a space 15in. × 13¼in. 4¾in. above the Motor Board and 2¾in. below.

PRICE £11 . 11 . 0 *Including Purchase Tax*

Plus 5/- Pkg./Carr./Ins.

ACCUMULATORS

By world-famous maker. 2 volt 10 amp. **4/11**

WENVOE COILS

Television Coils and Conversion Data for the Premier Long Range Electrostatic and Magnetic Television Kits are now available at **21/6** *per set (post paid). Since the Sutton Coldfield Rejectors will tune satisfactorily to the frequency required on the WENVOE Transmitter, Rejector Coils are not included in the above price. Should these be required they can be supplied at* **10/-** *per set of four.*

0-1 mA METER IN PLASTIC CASE

The movement is 0-1 mA mounted in a case 3½in. square and 2¾in. high. The scale is 2¾in. long and the dial is 2¼in. in diameter. There is ample room in the case for a switch, and multipliers. Internal Resistance 100 ohms. Price **27/6.**

THE NEW BSR "MONARCH" AUTO-CHANGER

This is a **3-speed** automatic mixer record changer designed to play 12in., 10in. and 7in. records intermixed in any order. Capacity 10 records, operates on 100/125—200/250 volts 50 c/s. A.C.

New reversible dual stylus crystal pick-up has extended frequency range to 10,000 c.p.s. Self-compensated for the L.F. lower frequencies with the Turnover frequency at the correct point. **PRICE £17/17/6,** plus 5/- packing, carriage and insurance.

GARRARD ELECTRIC 'GRAM MOTOR



Induction motor 100-250 volts, 50 cycles A.C. only. The GARRARD Induction Motor is totally enclosed. Entirely free from radio frequency disturbance, magnetic hum and electrostatic. Variable speed. With 12in. Turntable. Price **£4.18.6,** plus packing and carriage 5/-.

GRAMOPHONE UNITS

"Golden Wing" Playing Desk, consists of the famous Collaro RC500 Autochanger Unit, single speed 78 r.p.m. Mag. Head, mounted on attractive metal plinth.

	£10 10 0
Ditto (Unmounted, with Mag. Head)	£11 18 6
Ditto (Unmounted, with Crystal Head)	£12 2 11
Collaro single speed rim drive Unit with plug-in Mag. Head, 78 r.p.m.	£6 10 6
B.S.R. Model GU4 3-speed Gram. Unit, incorporates the latest type of Crystal turnover Head for long playing and standard recordings	£9 19 11
Garrard Gramophone Motor. Variable speed induction Motor. Complete with 12in. turntable (this Unit does not include Pick-up)	£5 19 6
Connoisseur 2-speed Gram. Unit LESS Pick-up	£22 18 8
Pick-up with 2 Heads for above	£10 0 8
Conrad Rim Drive Gramophone Unit LESS Pick-up Arm 78 r.p.m.	£4 3 10
Ditto, 33 r.p.m.	£4 7 5
B.S.R. 3-speed Rim Drive Gram. Unit LESS Pick-up	£6 8 6
B.S.R. Single-speed Rim Drive LESS Pick-up, 78 r.p.m.	£3 14 4
Ditto, 33 r.p.m.	£3 14 4
Decca Pick-up with 2 Heads, one long playing, and one standard	£7 0 0
Plessey Auto-changer 3-speed Mag. Head, plays mixed records	£33 13 0

Please add 5/- extra for packing and carriage charges on Gramophone Units.

ALL THE ABOVE ARE FOR USE ON A.C. MAINS ONLY

Govt. Surplus—Ex-W.D. AERIALS *BRAND NEW!*



12ft.—3 4ft. screw-in sections of copper-plated steel highly flexible with non-stick screw fits., tapering ⅛in. to ¼in. Brand new in container **6/9.** Also plug-in type **4/9.** Packing and carriage 1/6. Insulated Base, 3/-. Webbing waterproof carrying case with shoulder sling **2/6.**

These aerials make ideal fishing rods

TELEVISION

A WORLD-FAMOUS Manufacturer's Surplus of RADIO RECEIVER CHASSIS 7-valve RECEIVER

built to exacting specifications and incorporating features ensuring superlative tonal qualities and world-wide reception. Specification: 8 watts push-pull output using 2 Mazda Pen. 45 Valves. Ample negative feedback is applied over all the audio-amplifier. Amplifier Mazda Type HL41DD gives signal Detection A.V.C. and Phase Splitting. Two stages of I.F. amplification 465 K.c., using Mazda VP41. **FOUR WAVEBANDS—14 M.-34 M., 34 M.-85 M., 190 M.-600 M., 900 M.-2,000 M.** DIRECT and VERNIER TUNING. Gram. position on Switch. Provision for external Loudspeaker. For use on 200/250 A.C. Mains. **£13 10/-,** plus 21/- Pkg. and Carr.

7-VALVE SUPERHET CHASSIS

All control mountings cut out, fitted with completely assembled full vision drive scale, long, medium and short wavebands and band spread. Heavy flywheel tuning. **19/6,** plus 2/6 pkg. and carr.

RADIO CABINET (WALNUT FINISH)

Outside dimensions 16½in. high, 9½in. deep 17in. wide

A beautifully made cabinet. **£3 10/-,** plus 7/6 carr./pkg.

5-VALVE SUPERHET RADIO CHASSIS

Drilled and cut out for all necessary control mountings and **Mains** Transformer fitted with 5 Amphenol Octal Valveholders, Aerial, Earth and Gramophone Sockets. 500 pd Tuning Gang Condenser, full vision drive Tuning Assembly consisting of unbreakable Perspex, 3-coloured scale for long, medium and short wavebands. Calibrated in metres, Kilocycles and station names, price **39/6.**

AS A SPECIAL OFFER—CABINET ILLUSTRATED ABOVE AND CHASSIS, TOGETHER £3. 5. 0 Plus 7/6 Carr., Pkg. & Insurance.

THIS IS OUR ONLY ADDRESS

207 · EDGWARE ROAD · LONDON · W.2

TERMS OF BUSINESS: Cash with order or C.O.D. over £1. Please add 3/- for Post Orders under £10. 1/6 under 40/- unless otherwise stated.

Telephones: AMBassador 4033 PADdington 3271/2

OPEN UNTIL 6PM on SATURDAYS

—KIT OR COMPONENT SOLD AS A PREMIER PRODUCT BY FIRMS OTHER THAN OURSELVES

CONTROL

Sampling is a regular test procedure. Accelerated and accentuated routines have been developed over many years of specialization. In the manufacture of resistors, relatively high processing and working temperatures introduce distinct problems of a unique character, to control which, special test and control equipment is used. Humidity, pressure and spray chambers : life-test panels for continuous, pulsed and overload power runs : laboratory resistance bridges : surface-temperature pyrometers—all devised and employed to ensure maximum reliability and stability and is evidence of our insistence upon 100% efficiency throughout daily production.

Resistors by ERG

Depending upon the duty of a resistor, special protective coatings are available :

VITREOUS · CEMENT · SILICONE · LACQUER

Full information on the application of ERG Wire Wound Resistors is to be obtained from our London Sales Office : 10 Portman Square, London, W.1. (Welbeck 8114.)

Type Approved for all Service Departments

ERG INDUSTRIAL CORPORATION LTD · MATTHEW STREET · DUNSTABLE · BEDS

---

1 KW TELEGRAPH TRANSMITTERS Two HF 300's output. Operation 3.5 mc to 16 mc.

RCA TRANSMITTERS. Type ET-4336. Complete with speech amplifier, crystal multiplier and VFO units. Unused and reconditioned. Can be supplied with very large quantity of spares

RCA TRANSMITTERS. Type ET 4332 modified by R.A.F. for use on crystal or master oscillator. Complete with speech amplifier.

EX-R.A.F. 1143 TRANSCEIVERS.

NAVY MODEL COLLINS TRANSCEIVERS. TCS9. Complete sets.

No. 12 TRANSMITTERS. With coupling units, remote control, etc

AR.-77's, S27's, NC45, HRO and others

AUTOMATIC HIGH SPEED TELEGRAPH EQUIPMENT "BOEHME" (U.S.A.) Up to 400 signs per minute on line and wireless.

NAVY MODEL TBY-8 TRANSMITTING-RECEIVING EQUIPMENT. Output 0.75 watts on M.C.W. telegraphy and 0.5 watts on telephony. Frequency range 28-80 mc.

All above items in excellent working condition.

Working demonstration upon request.

TX VALVES 833, 805, 807, 814, 861, 866A, DET-16 and many others.

Large stock of Tx condensers, crystals and other components. Alignment and repair of communication receivers and all other short-wave equipment undertaken.

P.C.A. RADIO

Transmitter Division :—
The Arches, Cambridge Grove, London, W.6.
Tel. RIV 3279.

Receiver Division :—
170 Goldhawk Road, London, W.12.
Tel. SHE 4946.

RADIO EXCHANGE CO.

STROBE UNITS. With 6 EF50's, 5Z4, SP61, five EA50's, dozens of resistors, condensers, pots, relays, transformers, chokes, smoothing condensers etc. Brand new. ONLY 59/6.

HIGH RESISTANCE HEADPHONES. Ericsson's first grade, 4,000 ohms per pair, brand new boxed, 17/6, post 1/1d.

RECEIVER P48. Complete with valves, tuning 85-95 mc/s, these are ideal for Wrotham or "2" metre conversion. Housed in attractive robust grey cases these contain 4 EF54's (RF, mixer, Xtal multipliers), EC32 (Xtal oscillator), 2 EF39's (2.9 mc/s IF), EB34 (det), 615 and 6V6 (audio). In original cartons, complete with circuit, 69/6, post 1/8. Slightly soiled, 49/6.

TRANSMITTER 21. Sending CW, MCW or speech on 4.2—7.5 and 18—31 mc/s these are complete with circuit, control box, key and front panel. Wire (not formers) from PA coils, and relays, have been stripped by the M.O.S. but may easily be replaced with the aid of our circuits and data. In excellent condition (less valves), 15/-.

VIBRATOR UNIT 21. 6 v. input, approx. 160 v. at 40 mA. smoothed DC output ; designed for the Tx/Rx/21. In new condition. ONLY 17/6.

INDICATOR 182A. With VCR517 6in. tube, 3 EF50's, 6 SP61's, 5U4, 9 pots, resistors, condensers, etc. Ideal for television or 'scope. New in crates (less relay). 79/6.

BRAND NEW ACCUMULATORS in transparent, unspillable plastic cases. 7 A.H. 2 v., 3in. x 1¾in. x 4in., 6/6.

NEW 1355 CONVERSION data for all 5 TV channels, 3/-.

1355 RECEIVERS complete with 11 valves, 45/-.

1155 COMMUNICATION RECEIVERS, unused in original transit case, £10/15/-.

MIDGET AMPLIFIERS with two 12SH7's, one 12S17, these measure 5in. x 3¼in. x 3in. OUR PRICE 12/6.

HEMISPHERICAL CARBON MICROPHONES, with switch, new, boxed, 5/-, post 5d.

MALLORY 4-PIN VIBRATORS. 12 v., non-sync. 5/- (post 9d.).

14 ST. MARY'S STREET, BEDFORD
Phone : 5568.

"CURRENT RELEASE"

100 SOUND REASONS TO

Come to Classic for "The Classic Service"

QUALITY AMPLIFIERS, SPEAKERS, RADIO FEEDER UNITS, MOTORS AND AUTO-CHANGERS, PICKUPS, TAPE AND DISC RECORDING AND REPRODUCING EQUIPMENT, HI-FI AND BIG SCREEN TELEVISION RECEIVERS.

WE HAVE THE FOLLOWING 100 QUALITY ITEMS AVAILABLE FROM STOCK.

Item No.				Item No.				Item No.			
1	**Leak** T12 Amplifier ...	£28	17 0	39	**Goodmans** Axiom 150	£10	5 0	68	**Bradmatic** 5E Erase Heads ...	£3	5 0
2	**Leak** Vari-slope ...	£12	12 0	40	**Wharfedale** Gol. CSB	£18	10 0	69	**Bradmatic** 5RP Rec. Head ...	£3	5 0
3	**Leak** RC.PA/U ...	£9	9 0	41	**Wharfedale** Units from ...	£4	14 6	70	**Bradmatic** 6RP Rec. Head ...	£3	15 0
4	**Leak** Pickup Ruby ...	£11	17 6	42	**Wharfedale** Cross-over ...	£2	15 0	71	**Collaro** T/R Motors...	£1	18 0
5	**Leak** Pickup Diamond	£18	4 6	43	**Wharfedale** LS/Sep....	£3	0 0	72	**B.S.R.** T/R Motors ...	£3	0 0
6	**Leak** Pickup Trans. ...	£2	10 0	44	**E.M.G.** Filter ...	£4	10 0	73	**Qualtape** Tape Desk	£16	16 0
7	**Williamson** Amplifier	£32	10 0	45	**Acoustical*** ...	£83	0 0	74	**Lane** Tape Desk ...	£16	16 0
8	**Williamson** Preamp...	£9	9 0	46	**Vitavox** Klipschorn*	£145	0 0	75	**Wearite** Tape Desk ...	£35	0 0
9	**Quad** Amplifier and			47	**Corner Reflex** Spkr.	£15	15 0	76	**Bradmatic** Tape Desk	£41	0 0
10	**Quad** Control Unit ...	£35	0 0	48	**Decca** T/O Crystal P/U	£2	10 0	77	**Wirek** Reporter ...	£58	0 0
11	**Quad** Radio Feeder ...	£26	0 0	49	**Decca** XMS ...	£7	0 0	78	**Wirek** Magnegraph...	£69	0 0
12	**Rogers** R.G. Minor ...	£11	0 0	50	**Decca** P/U Arm ...	£1	7 6	79	**Simon** Portable ...	£60	0 0
13	**Rogers** Quality Amp.	£18	10 0	51	**Decca** P/U Heads ...	£2	19 2	80	**Sound Mirror** Table	£69	10 0
14	**Decca** Amplifier ...	£25	10 0	52	**Acos** P/U Arm ...	£1	7 6	81	**Ferrograph** ...	£79	10 0
15	**Sound Sales** AZ1 ...	£32	10 0	53	**Acos** GP 19 Head ...	£2	3 4	82	**C.J.R.** Portable ...	£119	0 0
16	**Bradmatic** Recording Amp. P/Pack and Osc.	£62	0 0	54	**Acos** GP 20 Head...	£2	3 4	83	**MSS** PMR/1 RCC ...	£150	0 0
17	**Connoisseur** Single-speed Motor ...	£23	13 0	55	**Connoisseur** L/W Pickup ...	£7	9 0	84	**Reslo** Ribbon ...	£9	9 0
18	**Connoisseur** 2 speed	£22	15 0	56	**Connoisseur** Super L/W L.P. Head ...	£3	15 0	85	**Reslo** Table Stand ...	£2	15 6
19	**Garrard** 201B ...	£23	10 0	57	**Connoisseur** Super L/W 78 Head ...	£3	15 0	86	**Vitavox** Microphone	£2	15 0
20	**B.S.R.** MU10 ...	£3	10 0	58	**Connoisseur** Yellow Spot ...	£3	15 0	87	**Bradmatic** Amplifier	£62	0 0
21	**B.S.R.** MU14 ...	£6	10 0	59	**Chancery** L.P. Attach.	£3	5 6	88	**Pye** 12in T/V Console	£90	6 0
22	**B.S.R.** GU4 ...	£8	14 0	60	**Connoisseur** P/U Trans. T6 ...		13 0	89	**Ferguson** 14in T/V Console ...	£84	0 0
23	**Decca** GU4A ...	£11	2 0	61	**Connoisseur** P/U Trans. T50 ...		15 0	90	**Pye** 12in Table Model	£76	13 0
24	**Garrard** RC.72A ...	£12	12 0	62	**Connoisseur** Sapphire needles...		15 0	91	**Ferguson** 12in Table Model ...	£68	5 0
25	**B.S.R.** Monarch ...	£17	17 0	63	**Bradmatic** Mumetal Screens ...		4 6	92	**Viewmaster** T/V† ...	£30	0 0
26	**Collaro** RC500 ...	£10	0 0	64	**Bradmatic** Circuits...		5 0	93	**Rainbow** Projection T/V ...	£175	0 0
27	**Collaro** 3/RC511 ...	£11	11 0	65	**Bradmatic** Guide Pillars ...		5 0	94	**4ft x 3ft Proj. Screens**	£25	0 0
28	**Plessey** 3-speed Auto	£21	0 0	66	**Bradmatic** Osc. coils		9 0	95	**Sound Sales** Proj. T/V	£145	0 0
29	**Collaro** Motors ...	£1	18 0	67	**Bradmatic** Plate Coils		9 0	96	**Frith** Proj. T/V ...	£115	0 0
30	**Brierley** Transcription	£16	16 0					97	**Telemax** Proj. T/V ...	£125	0 0
31	**Classic** Concert ...	£45	0 0					98	**Haynes** E.H.T. Trans.	£4	5 0
32	**Decca** Corner 3 ohm	£21	10 0					99	**Haynes** 5914 Scan Coils ...	£2	2 0
33	**Decca** Corner 15 ohm	£21	10 0					100	**Haynes** Line Trans....	£2	3 0

*Delivery from Stock. †Components only.

REMEMBER—"THERE IS NO SUBSTITUTE FOR QUALITY"

Quality Amplifiers, Speakers and Tape Recording Equipment Demonstrated Daily.

Television Specialists—Components for Viewmaster and Large Screen T/V available from stock. Cathode Ray Tubes, Projection Units, Wide Angle Scanning Components, all types and makes of Valves, etc., by return of post.

We will ship to any part of the British Isles or Abroad

Terms: CASH OR C.O.D. Hire Purchase or Credit Sale Facilities Available on Application.

The Classic Electrical Co. Ltd.

"THE HI-FI TELEVISION SPECIALISTS"

352/364, LOWER ADDISCOMBE RD., CROYDON, SURREY. TELE. ADDISCOMBE 6061/6062

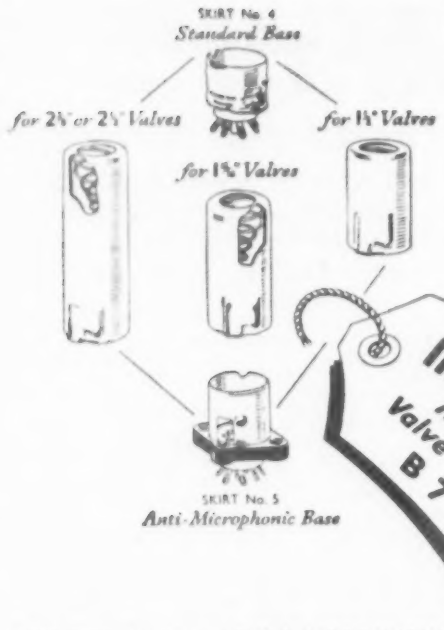

Recognised as the Most Reliable Valveholders

B7G Valveholders

are now available moulded in:—

Phenol Formaldehyde *(Black).*

Nylon loaded Phenol Formaldehyde *(Natural Brown).*

P.T.F.E.

and now **MYCALEX.**

Wholesale Enquiries:—
CYRIL FRENCH LTD.,
High St., Hampton Wick,
Middlesex. KIN. 2240.

Manufacturers' Enquiries: THE McMURDO INSTRUMENT CO. LTD., VICTORIA WORKS, ASHTEAD, SURREY
ASHTEAD 3401

ALL the A.C. power you require from your D.C. supply



with a

Valradio

D·C·/A·C· CONVERTER

Models for Electric Gramophone from **£8 16 0**

Models for

- Radio-grams and Autochange Radio-grams (inc. 3-speed motors)
- Radios
- Televisions, etc.

from **£11 16 6**

Input, 6, 12, 24, 32, 50, 110 or 200/250V. D.C.
Output 230V. 50 or 60 c/s.

Valradio — *Descriptive literature W.W. 20 from the manufacturers:* NEW CHAPEL ROAD, HIGH ST., FELTHAM, MIDDX. Tel.: FELtham 4242

Service Dept.: 57 Fortess Road, London, N.W.5. Tel.: GULliver 5165

Overseas Enquiries to nearest E.M.I. Organisation Depot

ALEC Davis SUPPLIES Ltd.

Dept. W.W.

18 TOTTENHAM COURT ROAD, LONDON, W.1.

Tel.: MUSeum 2453/4539

Business Hours: Monday-Friday — 5.30 *Saturday 9 — 1*

RELAYS



600 or 3,000 TYPE

D.C. COIL RESISTANCE

3,000 TYPES: 1.9Ω to 80,000Ω
600 TYPES: 0.4Ω to 9,200Ω.

ALSO LARGE STOCKS OF DOUBLE & TRIPLEWOUND AND SLUGGED COILS.

SIEMENS TYPE HIGH SPEED

CONTACTS

3,000 TYPES: up to 8 sets.
600 TYPES: up to 4 sets.

3,000 TYPES: Make (M), Break (B), in Twin-silver Twin-platinum, Dome-silver (2 amp.), Tungsten (5 amp.), and Flat-silver (8 amp.). Change-Over (C), in all but Tungsten: Make-Before-Break (K), in Twin-silver and Twin-platinum.

600 TYPES: (M), (B) and (C), in Twin-silver and Twin-platinum.

KEY SWITCHES.
2 C.O. to 8 C.O. Special types made up to order.



KEY SWITCHES

SPECIAL.
Kit of parts less chassis for photographic timer unit, ½ sec. to 100 secs.

RADIO BULLS VALVES
246 HIGH ST. HARLESDEN N.W.10



"DEMOBBED VALVES" MANUAL

giving equivalents of British and American Service and Cross Reference of Commercial types with an appendix

2/3

of B.V.A. Equivalents and comprehensive Price List. We have still many valves left at OLD-BUDGET rates which are actually sold at the old price.

John Bull
for HOME and
EXPORT

to all parts of the Commonwealth and beyond—safely packed and fully insured (no C.O.D.) and free of tax.

During these years, as our statistics record, we have helped with rare valves in over 265,000 individual and difficult cases. This of course is in addition to our normal service in current valve types.

If yours is a (Rare) Valve problem BULLS are the people most likely to solve it.

Easy Terms. 28-page illustrated catalogue 5d. stamps.

TAYLOR ON EASY TERMS. EASY TERMS up to 10 months—and very near Cash Price on all TAYLOR METERS

PIFCO ALL-IN-ONE RADIOMETER. A.C./D.C., tests everything in radio. Complete with test prods, 29/6. Post 1/6.

TAYLOR 7-range multimeters. A.C./D.C., 0-6-30-150-300 v. 0-30 mA.—300 mA-3 amperes precision M/I movement, 50/-. Post 1/6.

AMPLION TEST METER. 1,500 ohm per volt on all D.C. and A.C. ranges, 10 v., 100 v., and 500 v. D.C. and A.C., 50 mA and 500 mA D.C. Resistance up to 200,000 ohm (2,000 ohm centre scale), with self-contained battery. 5,000 volt range with a suitable H.T. test prod (9/6 extra). Supplied with test prods. Multi-colour scale easily readable, £5.

CONDENSER TESTERS AND RECTIFIER UNITS. Plugs straight into A.C. mains, 200/240 v., and is indispensible for examination of condensers. Very slight and intermittent leakages which cannot be discovered by conventional instruments can be traced by this unit. Complete 39/6. Post 1/-. Supplies are becoming limited. Order now.

A.C./D.C. NEON TESTER, TYPE 400. This new model is specially designed for one-pole tests on mains, incorporating a highly sensitive neon tube—striking voltage 100/500 v. A.C./D.C. Also suitable for indicating polarity on D.C. current, when the glow of the lower electrode will indicate the negative pole. 11/3. Post 9d.

HYDROMETERS. Unbreakable, all plastic, correct for 60° F., 7/6. Post 9d.

ROD AERIALS. 1-foot sections, interlocking and extending, copper plated steel, 2/6 dozen.

"WIRELESS WORLD" Radio Data Charts, 7/9.

ADCOLA 3/16in. DIA. BIT SOLDERING INSTRUMENT. Miniature type to meet every requirement for Radio, Television, etc., 22/6. Post 1/6.

SPEAKER MATCHING TRANSFORMERS. Ex-Govt. Surplus, guaranteed, 2/-. Post 6d.

SERVICE SHEETS, the one you require enclosed if available in a dozen assorted. Our best choice, 10/6.

MORSE BUZZER OUTFITS. Consisting of a buzzer, a morse key and a battery compartment, all mounted on a polished baseboard. All parts high grade ex-Air Ministry. An excellent gift for a boy, 6/-. Post 1/-.

Real Colours throughout. Not just surface spray!!! NEW COLOUR FILTERS FOR TELEVISION SCREENS. For viewing in three delightful colours graduating from blue at the top, red in centre to green at the bottom. Gives a three-colour pastel shade picture on any black and white screen. 9in. and 10in., 7/-; 12in., 7/6; 15in., 10/6. Post 1/-.

B.T.H. Germanium Crystal Diodes. Sale price, 2/-. Post 6d. W. circuit diagram.

THE FOLLOWING ALLES WIDE ANGLE COMPONENTS ARE NOW AVAILABLE FROM STOCK:

No.	
DC300 Deflector coil	42/-
GL18 Width coil	10/-
GL16 Linearity coil	10/-
PC302 Focus coil	35/-
LO305 Line Scan Trans.	50/-
FO305 Frame Trans.	21/-

50% REDUCED

JUNKERO PATENT MULTI-PURPOSE TOOL

It punches, bends, shears and threads, specially designed for Model Making, Metal Working and Home Repairs. (Formerly 30/- now 10/-. With "Xakto" slide gauge (Formerly 37/6), now 17/6. On APPROVAL, one week. Refund Guaranteed.

NOW 10/- TAX FREE

Post 1/6.

Universal Minor	£10	15 0
Model 7 and 40 Avometers	£19	10 0
Signa Rinnerator, Mains or Battery	£30	0 0
Universal Bridge	£26	0 0
Electronic Testmeter	£40	0 0
ValveCharacteristic Meter	£60	0 0
D.C. Avominor	£5	5 0
Model 8 Avometer	£23	10 0

ELECTROLYTIC CONDENSERS (Exnd Nov 1952 Stock).

Wire Ends		Cans	
2 m/d. 450 v.	2/-	8x8 m/d. 500 v.	3/6
4 " 450 v.	2/6	8x16 " 500 v.	4/9
8 " 500 v.	2/6	16x16 " 500 v.	5/9
16 " 500 v.	2/9	16x24 " 350 v.	5/9
25 " 25 v.	1/3	16x32 " 275 v.	6/6
50 " 50 v.	2/-	16 m/d. Govt surplus 175 v. each	1/-

Post 6d.

MICROPHONES

RESLO RV Ribbon	£9	0	0
" VR Ribbon	£7	5	0
" PGD	£5	0	0
" VMC	£4	0	0
ACOS 30	£6	0	0
" 22/2	£4	4	0
" 16/2	£6	6	0
GRAMPIAN MCR.M.C.	£12	12	0
" DP2 W.S.	£5	17	6
Desk Stand	£6	10	0
Table Stand		15	6
Floor Stand	£2	15	0
Floor Stand, Lightweight	£4	5	0
	£2	2	0

WIDE ANGLE P.M. FOCUS RINGS.

For use with 14in. to 17in. Tubes.

Tube		
W.22 14in.	Mullard M36/22 ..	50/-
W.20 16in.	Mullard M41/1	82/6
W.25 14in.	Brimar ..	87/6

PICK-UPS

Goldring Turnover, Model 165 (with twin sapphire) £3.0.3

Acos GP19 Head	£1	3	4
Acos GP20	£3	11	5
Decca X/M/S, 2 Heads	£7	0	0
Connoisseur with 1 head	£6	9	0
Do., Extra heads	£3	11	8
Wilkins & Wright	£7	10	7

COLLARO MOTORS AND AMPLIFIED RECORD PLAYERS

AC314MB Rim Driven Motor Const. Speed Mag. P/U. Head	£6 10 5
AC544CB Ditto, Crystal P/U. Head	£8 14 11
AC314HF Ditto, Hi-Fi, P/U. Head	£8 14 11
AC 3/514 Rim driven Motor 3-speed with P/U. less head	£7 14 6
RC511 Auto Record Changer, Single Speed Mag. P/U.	£11 16 9
RC3/521 Ditto, but 3-Spee. with P/U. less Head (Head extra)	£12 9 9
RC 3/522 Ditto, Mixer	£14 1 6

SPECIAL OFFER:
RC 3/521 3 Speed Auto Changer with Dual Purpose ring-in Head. Total Price incl. P.T. and Carriage £15.19.7

LONDON — MIDLAND — HOLME MOSS — KIRK o'SHOTTS — WENVOE

W.B. 100/105 Chassis, Trans., Choke, Speaker	£6	13	0
T.C.C. Condensers No. 58 LONDON	£7	0	0
T.C.C. Condensers No. 58 MIDLAND Holme Moss, Kirk o'Shotts, Wenvoe	£7	7	0
WESTINGHOUSE RECTIFIERS (5)	£3	8	10
EDISWAN Morganite Resistors			
No. 40A LONDON	£1	16	3
No. 40B/E MIDLAND/WENVOE	£1	15	3
No. 40C/D/H. MOSS KIRK O'SHOTTS			
EDISWAN Type Q V/Controls at each		5	0
BULGIN Tag Panels, Switch, etc., No. 7		14	0
COLVERN Wirewound Pots (6) No. 6	£1	2	6
BELLING-LEE Plug and Socket, etc., L707		3	3
WW/CCA WEARITE Coils and Choke			
LONDON	£1	1	9
WW/CCB MIDLAND—WW/CCC H. MOSS	£1	10	0
WW/CCD K. O'SHOTTS—WW/CCE WENVOE			
G.E.C. Neon Indicator Type O		4	0
WB Tube Supports 12in.	£1	1	6
Viewmaster Constructor's Envelope, Instructions and diagrams A-B-E or C/D		7	6

VIEWMASTER



7/6 Complete Plans, Circuits, Diagrams and Constructional Data.

VALVES

Special Purpose. Mains Series.

O1A	8/-	6BA7g	21/6
1A4	14/2	7B7	15/6
1B4	14/2	10	12/9
1F4	10/9	22	19/6
1R5	12/9	71A	9/5
1P5	12/1	112A	12/9
1J6	12/9	81	20/2
6A4	16/1		

LANE TAPE TABLE Mk. 2

Incorporating Features Ensuring LOW LEVEL OF "WOW" and "FLUTTER."

THREE MOTORS
For Smooth running. A great improvement on friction drives.

FAST "FORWARD" AND "REVERSE" REWIND
Provision is made for fast forward and rewind. The action is simple and rewind time is approx. one minute only.

TWIN TRACK
Two tracks can be recorded on tape allowing for approx. one hour playing from standard 1,200ft. spool of tape.

HIGH FIDELITY
High fidelity record/playback head wound to high impedance on Mu-Metal Laminations with half throw gap.

ELECTRO MAGNETIC ERASE
Magnetic erase head is provided allowing one track to be erased, without affecting the other.

BRIEF SPECIFICATION:
Finish: Quality stove enamel. Tape Speed: 7½ips. exc. Size: 11½in. x 16½in. Depth 4½in. below Table. For use on A.C. 200/250 v. 50 cycles

ONLY **£16.10.0**

Carriage, packing and insurance 10/- extra.

ELECTRIC ENGRAVER

for all metals, plastics, etc. Plugs straight into any A.C. light socket. Powerful. Guaranteed. Complete with 4ft. of flex.

No Battery, Accumulator or Transformer needed. Post 1/-.

TAX FREE **15/-**

REAL HOBBY & MONEY MAKER

RADIO BULLS VALVES
246 HIGH ST. HARLESDEN N.W.10

(Kindly mark envelope WW10)

GARRARD SWINDON

the name which helps to sell the Best Radio Grams

Throughout the Years . . . Throughout the World . . . Garrard has reigned supreme in producing Turntable Units of unsurpassed quality.

Manufacturers who use Garrard Units in their finest instruments always mention them by name in their sales specifications.

FOR GREATEST EFFICIENCY AT THE HIGHER FREQUENCIES

SILVERED JAY CERAMIC

PRECISION CAPACITORS

FOR TELEVISION, F.M., AND ALL U.H.F. APPLICATIONS

Constructors', service replacement, and all kit types.

High precision and laboratory types.

INQUIRIES INVITED

Sole Export Agents —

Messrs. ANTEX, 3, TOWER HILL, LONDON, E.C.3.

JAY DEVELOPMENTS,

HEATH LANE, WEST BROMWICH.

Tel.: STO 2394.

AVOID BOTTLENECKS!

We hold large and comprehensive stocks of components and units. Contact us ; we may solve your production problem.

CONDENSERS. Silver Mica. Tubular. Mansbridge.

CRYSTALS. American FT241 & FT243 Etc.

HEADPHONES. DLR1, DLR5, IBA5 Etc.

METERS. Thermo. Moving Coil. Moving Iron.

RESISTORS. High Stability. Carbon. Wire wound.

VOLUME CONTROLS. Morganite Types H, M, LH. BI. Colvern 1-5 watts.

PLUGS & SOCKETS. Pye Patterns, Belling, etc.

Wholesale and Export Only.

ANDERS RADIO LTD.

167, HAMPSTEAD ROAD, LONDON, N.W.1.

EUS. 1639 EST. 1928

A MINIATURE MAGNETIC LIGHTWEIGHT EARPHONE

The new Amplivox E.4. Earphone has been primarily developed for use with office dictating machines, industrial equipments and hearing aids where a highly sensitive, lightweight, miniature receiver is needed.

Available in D.C. resistances 2-2000 ohms ; frequency 100-4000 c.p.s. ; diameter .835" depth .420" ; weight ¼ oz.

AMPLIVOX LTD.

2 Bentinck Street, London, W.1

AERIAL CO-AXIAL CONNECTOR

The BURGOYNE development for efficient watertight co-axial cable connections for which we are sole distributors. Made of aluminium with plastic insulation. Weight of assembled connector only 1½ oz.

2/6

RADIO & TELEVISION
ELECTRICAL APPLIANCES
ELECTRIC TOOLS
KITS

RADIO CENTRE

TEST EQUIPMENT
HI-FI REPRODUCTION
TAPE RECORDERS
AMPLIFIERS

Sole Distributors of the
BURGOYNE SOLDER GUN
79/6
Spare bits 10 for 7/6

THE BURGOYNE TAPE RECORDER

The increasing popularity of this Recorder emphasises the point that not only is it the lowest priced complete recorder on the market but it compares favourably in performance with any make costing twice as much.

£31.5.0 cash (carr. & pkg. 15/-)
or Hire Purchase terms :
£10.10.0 deposit and 12 monthly payments of 39/2

Supplied complete ready for use with the addition of a suitable microphone, of which we have the largest selection available in Great Britain ex stock.

COME TO THE RADIO CENTRE for demonstrations without any obligation—or order safely by mail.

Available in kit form at £27/5/0 with easy-to-follow manual for ease of construction. H.P. terms £9/5/0 deposit and 12 monthly payments of £1/14/6.

A RANGE OF TABLES BY BURGOYNE, LANE, TRUVOX, FERROGRAPH, QUALTAPE, etc. is always available. All tables previously advertised in stock for delivery by return.

A *NEW* MAGNETIC RECORDING AMPLIFIER FOR THE QUALITY ENTHUSIAST

THE BURGOYNE A.5.

For the first time a Magnetic Recording Playback Amplifier, incorporating features essential to High Quality Reproduction, is available at a price you can afford!

Until now, the reproduction of Tape Recordings has suffered due to inadequate playback facilities. "Too few valves trying to do too much work" has been the rule. Small, 3-valve Playback amplifiers may give quite good results where no great demands are made, but the A.5 is designed to give the highest fidelity possible in relation to the Tape speeds and Heads employed.

How is this achieved? Firstly by deciding on two entirely independent channels for Recording and Playback. The greatest obstruction to High Fidelity from Tape has been the hitherto rigid adherence to a common amplifier for both functions.

1 The Recording Amplifier and Bias Generator.

This employs a five-valve circuit and has fixed frequency correction networks designed to compensate for High Coercivity Tape characteristics at the standard speed of 7½in. per second. This circuit, designed for **Recording only**, makes sure that the recorded material is of high quality, thus ensuring that the Playback amplifier is not "beaten before it starts" by having to deal with a distorted or otherwise inferior input. The oscillator employs the latest Burgoyne coil, in a circuit which produces a clean erase and leaves the tape with a silent background. A variable H.F. Bias control is provided, in order that the amplifier may be used with any tape. A "Magic-eye" level indicator is also included being a further safeguard in the interests of first-class recording.

2 The Playback Amplifier.

This unit is created by the sound and simple method of taking an established High Quality amplifier (in this case the famous 7-valve "Quality Grand") and adding suitable pre-amplification in the form of an EF37A valve (high gain, low hum pentode). The pre-amplifier lifts the low input from the Playback Head to a level approximating the output of a High Fidelity Pick-up and the "Quality Grand" Amplifier, designed exclusively for High-fidelity work and incorporating independent Bass and Treble controls, ensures that the ultimate reproduction leaves nothing to be desired!

If Quality Reproduction is required from Tape, then a Quality amplifier must be used, and the Burgoyne A.5 Record Playback Unit is the first in the field with this essential feature. The power Unit for the above equipment is constructed on a separate chassis, which is linked to the main amplifier chassis by means of a multi-way cable.

The Burgoyne A.5 amplifier described above employs a total of 14 Valves, in an arrangement expressly designed for the connoisseur of tape recording.

Cash 20 gns complete
or on h.p. terms £7 deposit and twelve monthly payments of 26/8.
Also available less valves at **£15 cash** or h.p. terms £5 deposit and twelve monthly payments of £1.



Manual available at 5/- post free.

Or as an Operating Equipment
Ready to use at **£25 cash.**
H.P. terms £8.6.8 deposit
12 monthly payments of 31/8.

BURGOYNE de luxe RECORDER

A complete magnetic Tape Recorder incorporating the Burgoyne A.5 Amplifier is available either in Kit form at £39 or ready for use at £46 carr. and pkg. 15/-). The Recorder uses a selected Burgoyne Tape Table suitable for use with the Amplifier.

Hire Purchase Terms: KIT, £13 deposit. 12 monthly payments of 47/6.
RECORDER ready to use, £15.6.8 deposit. 12 monthly payments of 18/4.

M·O·S

MAIL ORDER SUPPLY CO., *THE RADIO CENTRE*
Dept. WW, 33, TOTTENHAM COURT ROAD, LONDON, W.1.
MUSeum 6667

TRADE and EXPORT ENQUIRIES INVITED

Send S.A.E. for lists of equipment available on H.P. Terms

M·O·S

TERMS OF BUSINESS

H.P. : Send deposit with order, which will be dispatched upon signing H.P. Agreement

CASH : Cash with order or C.O.D. if goods suitable for post (U.K.)

TAX-FREE *LOUDSPEAKERS!*

On August 4th, 66⅔% Purchase Tax was imposed suddenly on all types of Loudspeakers. Fortunately, we had large stocks in hand, and although there has been a run on all makes, we are still able to offer, at the time of going to press, limited quantities of high fidelity units by

BAKERS : BARKERS : GOODMANS : HARTLEY
VITAVOX : W.B. and WHARFEDALE

In addition we have P.M. speakers from 3in.—10in. at the pre-tax prices. Hire Purchase terms are still available at these prices—but the demand will be heavy so

—PLACE YOUR ORDER NOW !

SEE last month's issue for schedule of speakers stocked—or better still call and select your own speaker from stock.

THE MONARCH AUTOCHANGER by B.S.R.

The finest and lowest priced "MIXER-CHANGER" on the Market!

£17 . 17 or £6 deposit and 12 monthly payments of 23/1 AVAILABLE FROM STOCK

- ★ Automatically selects and plays 7in., 10in., and 12in. records, intermixed, at 33⅓, 45 or 78 r.p.m. Capacity 10 records.
- ★ Pick-up automatically returned to rest position and motor switched off after last record.
- ★ New reversible dual stylus crystal pick-up has extended frequency range to 10,000 c.p.s. Self-compensated for the L.P. lower frequencies with the Turnover frequency at the correct point.
- ★ Remarkably compact design makes it an ideal unit for the radiogram TV combination console.
- ★ Simplicity of design guarantees long life and trouble-free operation.
- ★ Beautiful styling and finish that will harmonise with any cabinet design.
- ★ Operates on 100 125-200 250 volts, 50 cycles, A.C. Models also available for 60 cycles A.C.

The B.S.R. 3-SPEED GRAMOPHONE UNIT, Type GU4

With High Fidelity Lightweight Crystal Heads

H. P. TERMS

DEPOSIT £3 . 6 . 11 and 12 monthly payments of 14/5

CASH £9 . 19 . 11

- ★ 33⅓-45-78 R.P.M. speeds by switching.
- ★ 4 Pole induction motor.
- ★ Automatic stop.
- ★ 10in. heavy pressed steel turntable fitted with removable rubber mat.
- ★ Dimensions 11in. x 12in. x 5in. deep

HIGH FIDELITY ENTHUSIASTS!

The BSR GU4 MOTOR UNIT is available with Decca interchangeable heads as used for the XMS Pick-up. The GU4 is fitted with automatic stop as usual, and the lightweight pick-up arm has a special adaptor.

GU4 complete with adaptor but less pick-up head, £8/0/8 Cash or £2/13/8 Deposit and 12 monthly payments of 12/3.

DECCA XMS Heads, red for 33⅓ r.p.m., brown for 78 r.p.m. £2/19/2 each.

GU4/DEH complete with 2 Decca heads £13/19/- Cash or £4/15 - Deposit and 12 monthly payments of 18/9.

HIRE PURCHASE BUYER'S GUIDE

A further selection of equipment available in our unrivalled H.P. service is detailed below.

TERMS OF BUSINESS : Deposit as indicated should accompany original order, when hire purchase agreement will be prepared. Delay in despatch is cut to a minimum. Please add sufficient to deposit to allow for carriage and packing.

PICK-UPS

	CASH PRICE	DEPOSIT	12 mthly. payments
ACOS GP20	£3 11 5	£1 3 10	6/9
ACOS GP20 with extra GP19 head	£5 14 9	£1 14 9	10/-
DECCA XMS with 2 heads	£7 0 0	£2 0 0	11/8
GOLDRING 100	£3 11 6	£1 3 10	6/9
CONNOISSEUR with one head	£6 9 0	£1 9 0	11/8
CONNOISSEUR with two heads	£10 0 8	£2 0 8	16/8
LEAK RUBY Standard or L.P.	£12 12 0	£4 12 0	16/8
LEAK DIAMOND	£18 4 6	£6 0 0	23/9
BSR PU3 L.P. head	£3 18 7	£1 1 0	8/-

RECORDERS AND AMPLIFIERS, Etc.

	CASH PRICE	DEPOSIT	12 mthly. payments
M.O.S. R.P.I. Feeder Unit Kit	£2 12 6	—	—
M.O.S. R.P.I. Feeder Unit Kit wired and tested	£3 12 6	£1 2 6	7/6
CHAPMAN 84 RADIO FEEDER	£17 6 8	£6 0 0	22/3
LEAK TUNING UNIT	£37 2 4	£12 10 0	46/6
QUAD RADIO FEEDER	£26 10 0	£9 0 0	33/4
HARTLEY TURNER 20 W. Amplifier	£33 0 0	£11 0 0	42/-
CONNOISSEUR Q10 Amplifier	£30 10 0	£11 10 0	50/-
ACOUSTICAL QUAD Amplifier	£25 0 0	£12 10 0	45/-
LEAP POINT ONE Amplifier	£28 7 0	£9 0 0	35/-
LEAK PRE-AMPLIFIER RC/PA/U	£9 9 0	£3 0 0	13/4
LEAK VARI SLOPE Amplifier	£12 12 0	£4 4 0	17/4
WILLIAMSON Amplifier	£40 15 0	£13 15 0	50/-
ROGERS QUALITY AMPLIFIER	£18 10 0	£6 2 0	24/-
HARTLEY TURNER Tone Control Pre-Amplifier	£7 10 0	£2 10 0	11/8
SIMON Tape Recorder	£80 0 0	£20 0 0	75/-
CJR Tape Recorder D1	£110 15 0	£40 0 0	150/-
MSS Tape Recorder PMR/1	£150 0 0	£50 0 0	190/-
M.O.S. A4 Record Playback Amplifier	£6 19 6	£2 0 0	11/8

Leading Distributors for all
B.S.R.
Reproducing and recording equipment.
Deliveries from stock.

M·O·S

Sole Agents for the Greater London area for all
HARTLEY-TURNER
reproducing equipment.
Deliveries from stock.

For the T.V. Constructor

ENGLISH ELECTRIC
16" C.R.T. TYPE T.901

Now available from stock

★ **MAGNETIC FOCUS** ★ **METAL CONE ENVELOPE**
★ **FLAT FACE** ★ **SHORT OVERALL LENGTH 17½"**

£24·6·5 cash or H.P. terms
£8·6·5 deposit and 12 monthly payments of 30/6.

THE BRANDENBERG
E.H.T. GENERATOR Type BG6900
6-9 Kilovolts

This High Voltage Generator has been developed for use with Cathode Ray Tubes requiring an anode voltage up to 9,000 volts. Not only does this equipment provide an economical High Voltage source but it is non-lethal. The Generator is ideal as a replacement for E.H.T. transformers, as an E.H.T. supply for Cathode Ray Tubes and as a service department supply for testing purposes.

FOR TV SERVICE ENGINEERS

This unit allows the substitution of an external E.H.T. supply to a TV receiver, thus allowing other circuits to be checked in the event of an E.H.T. failure, being light in weight and compact, the unit can be built into a lightweight portable test set for the engineer who has to service "on location."

If the regulation of the E.H.T. supply for a television receiver is poor, defocussing of the picture will inevitably occur during "Highlights." This unit has been designed to avoid this. The regulation is as good as 3 per cent.

£6 : 6s. cash or 42/- deposit and 12 monthly payments of 10/4

SPECIFICATION	INPUT VOLTS	mA	OUTPUT kV
H.T.	250	20	6
H.T.	300	25	7.5
H.T.	350	30	9
L.T.	6.3	0.45	—

SIZE: 4½in. × 3½in. × 5½in. high (enclosed in a louvred aluminium case).

BRANDENBERG E.H.T. GENERATOR SUB-ASSEMBLY

In addition to the above complete unit, we can offer the coil and E.H.T. rectifier as a completely pre-fabricated and wired sub-assembly. The addition of a 6V6 (or equivalent) in a simple circuit will give the same results as the complete unit. Full circuit details are supplied with each sub-assembly.

£3·7·6 CASH

Also available separately.
E.H.T. Transformer T900 for 6.9 kV. on polythene former and polystyrene dipped Litz wound, 28/- each
E.H.T. Transformer T812 as above, but for 8-12 kV., 45/- each.

COME HOME ON A BEAM!

Our well-known American type long beam **adjustable focussing** torches are again available for the coming dark nights.

	Head diameter	No. of batteries	Beam length	Price
Type A	3½in.	3	700ft.	18/6
" B	3½in.	2	400ft.	15/6
" C*	2½in.	3	500ft.	15/11
" J*	2½in.	2	300ft.	11/6

post free

Solid brass nickel-plated case with pull-out carrying loop. Complete ready to use with British batteries. Fully guaranteed. * As illustrated.

Components for this tube

ALLEN WIDE ANGLE SCANNING

£8·8·0 cash

or £2.16.0 deposit and 12 monthly payments of 12/6.

A set of components comprising Deflector coils, Width coils, Linearity Coils, Focus coils, Line Scan and Frame Transformers

Specially designed for the T901 CRT

LATEST RELEASE!

17" C.R.T. C17BM Standard Telephones **£26 . 19 . 0** cash or **£9** deposit and 12 monthly payments of **34/-**.

THE M·O·S QUALITY GRAND AMPLIFIER KIT



★ Wide range; continuously variable treble and bass controls which give both boost and cut about a mean reference level at 1,000 c/s.
★ Heavy neg. feedback used over the stages after the equaliser circuits, ensuring that action of the tone control is unimpaired by following amplifier stages.
★ No harmonic distortion. ★ 7 valves.
★ Two inputs. ★ For use on A.C. mains.

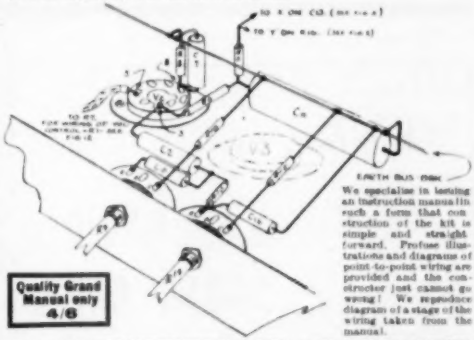

Quality Grand Manual only 4/6

We specialise in issuing an instruction manual in such a form that construction of the kit is simple and straightforward. Profuse illustrations and diagrams of point-to-point wiring are provided and the constructor just cannot go wrong! We reproduce diagram of a stage of the wiring taken from the manual.

TYPE A KIT 6V6/6V6 OUTPUT. **£9.19.6** cash, or **£3** deposit and 12 monthly payments of 15/-. Fully assembled and wired ready to use, **£12/10/-** cash, or **£4** deposit and 12 monthly payments of 17/6.

TYPE B KIT 6L6/6L6 OUTPUT. **£11.5/-** cash, or **£3.10/-** deposit and 12 monthly payments of **16/6**. Fully assembled and wired ready to use, **£13.15/-** cash, or **£4.10/-** deposit and 12 monthly payments of **18/9**.

SPECIAL CLEARANCE OFFER!

LIMITED QUANTITY OF

DECCA 37A PLAYERS

2-speed Player with crystal turnover pick-up mounted on heavy pressed steel base as illustrated.
Usual Price £12 . 1 . 6
OUR PRICE £10 . 0 . 0

(Carr. and Packing paid)

M·O·S

E & G **MAIL ORDER SUPPLY CO.,** *The RADIO CENTRE*
MUSeum 6667 **Dept. WW, 33, TOTTENHAM COURT ROAD, LONDON, W.1.**

EXPORT ONLY

GOVERNMENT SURPLUS (U.S.A.) & CURRENT PRODUCTION (BRITISH)

RECEIVING – TRANSMITTING – SPECIAL TYPE RADIO VALVES AND TUBES

MORE THAN 800 types in stock for immediate shipment — at prices that are competitive.

Kindly address your enquiries to :—

CHAPELLE *Limited*

1 NEWMAN STREET, LONDON, W.1

Cable Address : SUPEDIT, LONDON

We buy all . . .

U.S.A RADIO RADAR AND TEST SETS

Please Communicate with

ARROW SALES
INCORPORATED
7460 VARNA AVENUE
NORTH HOLLYWOOD
CALIFORNIA

C. MARKS & CO.

SPECIAL THIS MONTH !

COLLARO GRAM MOTORS. Governor-speed controlled (78 r.p.m.) motor. For A.C. tapped 190–130 v. and 200–250 v. Ideal for Tape Recorder work, gram., etc. Brand new and boxed **30/-** each, plus 2/6 post and packing.

CRYSTAL MONITOR, TYPE 2. (Less valves and crystals). Useful chassis 7in. × 5in. × 3½in. with cover. Contains 6-way Yaxley on/off switch, indicator lamp holder, large phone jack socket, resistors, condensers, L.F. choke and transformer, etc. Operational frequency equals crystal frequency. In strong wooden transit case **6/6** post free.

THE WELL-KNOWN 1066 RECEIVER. As used in the "Inexpensive Televisor." Brand new in original transit cases. **39/6**, plus 7/6 carriage.

T.V. CHASSIS (manufacturer's surplus.) Brand new. Size 12in. × 16in. A complete T.V. set (sound, vision and time bases) can be built on this chassis. Fitted with Wearite type valve holders, 8-B8A, 3-B7G and 6 international octals. Tagstrips are also fitted. An absolute bargain at **5/6**, plus 1/6 postage.

SMALL MAINS TRANSFORMER COMPLETE WITH METAL RECTIFIER. Suitable for T.V. pre-amp., tuner units and test equipment power supply. Input 230 v. 50 c.p.s.: Output 200 v. 50 ma., 6.3 v. 1.4 amps., **13/6**, plus 1/6 postage.

HALF-WAVE MAINS TRANSFORMERS. (Slightly sub-standard). Input 230 v. 50 c.p.s. output 300 v. 50 ma., 6.3 v. 1.5 amps. A snip at **5/-** each, plus 1/- post.

RECEIVER TYPE 161. Containing CV66 grounded grid triode, 2 VR136 Pentodes (EF14) and VR137 (6C5J) valves, a four-position coil turret. Has magnetic pawl and ratchet motor included. Covers 170 to 230 mcs. 45 meg. I.F. output. Outstanding value at **19/6** each, plus post 1/6.

38 SET WALKIE-TALKIE REC. TRANS. Frequency range 7.4 to 9 mc/s. The ATP4 valve and S.E. switch have been removed by the Ministry, but these are supplied together with the 4 ARP12 valves. Special offer at **25/-**, plus 1/6 postage.

VALVES, BRAND NEW AND BOXED. VU111 at **3/-** each **30/-** per doz. RK34 at **2/-** each **19/-** per doz.

SCREEN MODULATION TRANSFORMER AND AUDIO CHOKE, 8/6 pair.

CHOKES. 25 H., 150 ma. at **5/-** each. 20 H., 160 ma. at **4/6** each. Please add postage.

CALIBRATED DIAL. 3in. dia., graduated 0/100 with coupler and black Bakelite knob. **2/-** each, plus 6d. post.

MOVING COIL HANDSETS (ZA36226). Consists of moving coil microphone No. 7 and moving coil earpiece. **6/6** each, plus 1/- post.

PAPER BLOCK CONDENSERS (by well-known manufacturer). Brand new 4 mfd., 1,000 v. wkg. **2/6** each, plus 6d. post.

ELECTROLYTIC CONDENSERS. Brand new. Current stock. 8 mfd. 450 v. wkg. (metal can) at **1/11** each.

COPPER PLATED STEEL AERIAL RODS. 12in. sections, **2/6** per doz. sections.

BRITISH 4-PIN AMPHENOL VALVEHOLDERS, at **3/-** per doz.

300-OHM TWIN RIBBON FEEDER. Brand new. **5/-** per doz. yds.

68 COMMERCIAL ST., NEWPORT, MON. **Tele. 4711**
also at **25 Wyndham Arcade, Cardiff**
All mail orders and enquiries to Newport branch please

FERROXCUBE
FERROMAGNETIC FERRITE

FOR TELEVISION

THE improvement in television components, with their smaller size and greater efficiency, is largely due to Ferroxcube, the new Mullard magnetic core material.
The uses of Mullard Ferroxcube in the production of TV components fall into these three main groups:

LINE OUTPUT TRANSFORMER CORES

Since the advent of wide-angle television tubes, with the accompanying demand for increased E.H.T. supplies, the need for line output transformers of the highest possible efficiency has been greater than ever. Mullard Ferroxcube, with its low iron losses, completely fulfils this need — also facilitating the assembly of small, compact transformer units by means of solid, non-laminated U-shape cores.

DEFLECTION COIL YOKES

Mullard Ferroxcube cores in ring form are ideal for producing the magnetic circuit around deflection coils. Used in this way, Mullard Ferroxcube makes possible the construction of efficient deflector coils with a high Q factor. In order to simplify assembly problems, these ring cores are supplied either in the form of a complete circle, as two semi-circles, or as castellated yokes.

LINEARITY AND PICTURE WIDTH CONTROLS

Mullard Ferroxcube can very conveniently be extruded into rods and tubes. In this form it is ideal for use in linearity and picture width controls, providing a smooth control in a compact assembly.

OTHER APPLICATIONS

In addition to its uses in television receivers, Mullard Ferroxcube is also being widely employed in line communications, radar, and other specialised electronic equipments. The purposes for which it is already being most successfully applied in such equipments include filter networks, wide band transformers, magnetic amplifiers, and pulse transformers.

PLEASE WRITE FOR FULL DETAILS

Mullard **Mullard FERROXCUBE**
FERROMAGNETIC FERRITE

MULLARD LIMITED · CENTURY HOUSE · SHAFTESBURY AVENUE · LONDON . W.C.2
(MF376)

NEW ARCOLECTRIC SIGNAL LAMPS

For Low Voltage or Mains

Illustrated are a few of our wide range of new signal or indicator lamps.

A new mains voltage lampholder, Cat. No. S.L.88/N, has been developed for use with the Arcolectric MES neon tube. Among the features of this design are easy lamp replacement, from front or rear of panel, and a built-in resistor.

The low voltage lampholders are designed for use with standard MES bulbs. Features are, easy single-hole fixing and pleasing appearance. Bulbs are accessible from front or back of panel. Insulation of all types will withstand a flash test in excess of 1,500 volts A.C.

Write for Catalogue No. 127



S.L.88/N.

S.L.90.

S.L.86.



S.L.82.



S.L.92.

ARCOLECTRIC SWITCHES · LTD

CENTRAL AVENUE, WEST MOLESEY, SURREY · TELEPHONE: MOLESEY 4336 (3 LINES)

TECHNICAL DATA ON PHILIPS VARIABLE TRANSFORMERS

PHILIPS Variable Transformers, of a high efficiency, are available in 8 different types. Sturdily constructed and fitted with a graduated scale, they provide completely smooth control of secondary voltage from 0 V to 20% above the nominal primary voltage.

★ The Transformers given in the tables all have an input voltage of 220V 40-100 cycles. Models can however also be supplied for 110V or 130V input.

a = *overall diameter*
b = *depth behind panel*
c = *depth in front of panel*
d = *overall diameter*
e = *overall height*

Output ★	Secondary Voltage	Secondary Current	No-Load Losses	DESIGN						
				Panel Mounting				Bench Mounting		
				Type No.	Dimensions mm.			Type No.	Dimensions mm.	
					a	b	c		d	e
V.A.	V	A	W							
260	0-260	1	6.8	84514	137	130	30	84515	137	165
520	0-260	2	9	84516	137	150	30	84517	137	185
1040	0-260	4	17	84518	187	190	30	84519	190	260
2080	0-260	8	25	84520	187	200	30	84521	215	272

PHILIPS ELECTRICAL LTD.

INDUSTRIAL X-RAY EQUIPMENT · ELECTRONIC APPARATUS · LAMPS & LIGHTING EQUIPMENT
ARC & RESISTANCE WELDING PLANT & ELECTRODES · MAGNETIC FILTERS · BATTERY
CHARGERS & RECTIFIERS · H.F. HEATING GENERATORS · RADIO & TELEVISION RECEIVERS

Philips Electrical Limited, Century House, Shaftesbury Avenue, London, W.C.2

(P1203)

UNIVERSAL ELECTRONICS

London's Largest Selection of High Quality Communications and Test Equipment.

Test Equipment. AVO Wide range signal generators, as NEW, £25. **AVO** Model 7 as NEW, £15. AC DC Minors, £6 10/-. **TAYLOR** 120A meters, as NEW, £7. **TAYLOR** 65B signal generators, £11. **ADVANCE** E2 signal generator, perfect, £22. **COSSOR** Double Beam oscilloscope, good condition, £35. **COSSOR** 1035, as NEW, £80. Telecheck, perfect, £23. **COSSOR** ganging oscillator, £30. **EVERSHED** Wee Meggers 500 V., £10. Bridge type 250 V., £28. 500 V., £37.

Receivers. nCA AR77E good condition, £37 10/-. **HALLICRAFTERS** SX28, £50. **MARCONI** CR100, £32. **NATIONAL** NC200, £45. **ZENITH** Trans Oceanic in good condition, £27.

EDDYSTONE 640, £22 10/-; 740, £35; 750, £50; **MARINE**, £50. *IN STOCK. Hallicrafter* S38, SX24, SX43, S20R. *Hammarlund HQ120X, RME69, AR88's. Collins TSS equipment. Hallicrafters HT11A.*

VHF Gear. Wavemeters TS 69AP, 330-1,000 Mc/s. GR Wavemeter 75-55-400 Mc/s. 527 receivers. Marconi VHF receivers. Bendix BC221 frequency meters in stock. Klystrons type 723 AB. Magnetrons 2J26, etc.

Audio Gear. LEAK TL.12 in perfect condition, £25. **STC** Ball Microphones, £12. **PYE** 3-speed Autoradiogram; list price over £60, as NEW, £43.

Manuals (photostatic copies) available for RCA AR88 LF-D, AR77E, SX28's, 527's, HRO Seniors, etc.; at £1 7 6 each.

Amplifiers, etc.: LOWTHER Amplifier type 85P, good condition with pre-amp, £14. **VARIAC** transformers, 115 V. input, £5 each. **SCOPHONY BAIRD** tape recorder complete with microphone, and perfect, £40. **DECCALIAN** 3-speed Player, as NEW, £27. **TRIX-ETTE** unit complete, £30. **WRIGHT & WEAIRE** tape deck, NEW, £35.

Many other items of equipment in stock; too numerous to list. ALL ENQUIRIES WELCOMED.

We wish purchase: 723 AB Klystrons. 527 and 527CA Receivers. APR4 Receivers and all units TN16, 17, 18, 19, 34, etc. BC221 frequency meters and microwave equipment. RCA AR88'S wanted urgently.

Shop hours: 9.30 a.m. to 6 p.m. Thursday to 1 p.m.

OUR ONLY ADDRESS
DEPT. W.
27 LISLE STREET.
LEICESTER SQUARE, LONDON W.C.2
Phone: GERrard 8410 (Day)
MEAdway 3145 (Night)

TRANSFORMERS
COILS
CHOKES

TRADE ENQUIRIES INVITED

SPECIALISTS IN
FINE WIRE WINDINGS
MINIATURE DEAF AID TRANSFORMERS, PICK-UP
CLOCK AND INSTRUMENT COILS, ETC.

RADIOMENDERS LTD.
123-5-7 PARCHMORE ROAD, THORNTON HEATH, SURREY
LIVINGSTONE 2261 EST. 1933

Details of this
UNIT TELEVISION
are worth sending for!

Four completely wired, tested and reliable units give:— (1) Vision and sound, (2) Line time base, (3) Frame time base, (4) Power supply. Mounting for 9" or 12" tube optional.

These quickly assembled and adaptable units ensure successful operation at minimum cost. (The parts are *not* Government surplus, but newly made by a leading electronics company.)

Write now for further information.

UNITEL ELECTRIC 18, Avenue Road, Belmont, Surrey

RADIO HALTRON VALVES

We take pleasure in informing our overseas clients, that as and from 1st October, 1952 our address will be Haltron House, 49/51 Lisson Grove, London, N.W.1. This change of address will allow us to centralize all our warehouse and administrative offices under one roof, and thereby we hope to give even better service in the future.

HALTRON **HALL ELECTRIC LTD** HALTRON

HALTRON HOUSE, 49-51 LISSON GROVE, LONDON, N.W.1
Cables: Hallectric, London.

SOUND RECORDING?

these are your accessories

Recording Tapes

A complete range of recording tapes is available and the following can generally be supplied from stock. Simphonic Grade "A" High coercive tape, per 1,200ft. spool, 35/-. Simphonic Grade "B" Medium coercive tape, per 1,200ft. spool, 25/-. G.E.C. Grade "A" tape, per 1,200ft. spool, 30/-. E.M.I. Grade H65A Low coercive tape, per 1,200ft. spool, 35/-. E.M.I. Grade H60A High coercive tape, per 1,200ft. spool, 35/-. Scotch Boy Grade MC1-111 tape, per 1,200ft. spool, 35/-.

Spare Tape Spools

7in. Diameter standard metal spools, capacity 1,200ft., 4/-. 5in. diameter standard metal spools, capacity 600ft., 3/6. 7in. Diameter plastic spools, capacity 1,200ft., 4/-.

Microphones

The microphone illustrated is the standard one supplied with the Simphonic Model 2B Recorder. It is a crystal type hand microphone, and has a particular appeal because it is ideally suited for speech applications with small recording equipments. Chief characteristic is its high sensitivity at comparatively low cost. Complete with 9ft. screened lead and jack plug, £2/10/-.

Tape Joining Fluid

This special preparation is available to facilitate the splicing of broken plastic recording tapes. Dries firmly in a few seconds. Glass rod fixed into bottle cap for easy application. Per bottle, 4/9.

Type DML

Recommended for use where a higher standard of quality than is obtained with the crystal type is demanded. Useful as a general purpose microphone for Public Address work as well as many other applications. Sensitivity approximately the same as the crystal type, and this microphone has a substantially even frequency response up to 6,000 cycles. Complete with heavy cast base, 9ft. screened lead and jack plug and with built-in transformer and muting switch, £7/5/-.

SIMON SOUND SERVICE 48-50, GEORGE STREET, LONDON, W.1
Telephone: WELbeck 2371 (5 lines). Grams: Simsale, Wesdo, London, Cables: Simsale, London.

GOVERNMENT SURPLUS

LONDON CENTRAL RADIO STORES

DELIVERY FROM STOCK

ELECTRO MAGNETIC COUNTERS



Ex G.P.O., every one perfect, electro-magnetic, 500 ohm coil, counting to 9,999, operated from 25-v.-50-v. D.C., 4½in. long × 1½ × 1in., many industrial and domestic applications. **15/-.** **EQUAL TO NEW.** Post & pkg. 9d.

VIBRATORS, 2-volt, Type R70C. 7-pin self-rectifying. Output 200-v. at 60 mA. Made by Electronic Laboratories Inc., **7/6.** **Mallory, Type 600,** 6-volt, 4-pin American base, **7/6.** **Mallory, Type 602SC,** 12-volt, 4-pin American base, **7/6.**

UNISELECTOR SWITCHES

Full Wipers
3-bank **19/6** 4-bank **35/-**
6-bank **35/-** 8-bank **47/6**

Hall Wipers
4-bank, ... **27/6;**
6-bank, **27/6;** 8-bank, **42/6**

Have various applications, including automatic tuning circuit selection, etc. Operates on 25-50-v.

NIFE ACCUMULATORS

1.5-v., about 10 amps., size 5½ × 1½ × 1½in. Post and pkg. 9d. **6/6**
USED 3in. PM SPEAKERS **5/6**
NEW 3in. PM SPEAKERS, in good condition **8/6**

REDUCED PRICES!

PHILCO 8-VALVE Reconditioned SETS

— **UNIVERSAL MAINS** —

These superhet receivers have all been thoroughly overhauled at our works. Ready for immediate use and GUARANTEED. If in London call and see them for yourself.

TABLE MODELS

In light or dark oak or light walnut cabinet, size 19 × 14 × 10in. approx. Provision for normal or dipole aerials. Will receive British and European stations with great clarity, giving first-class reproduction.

Specially reduced price **£4**

ALL-WAVE TABLE MODEL

Incorporating two-speed tuning and provision for normal aerial or dipole. Medium or dark walnut cabinet, size 18½ × 20 × 9½in. Really excellent performance. Price **£6.10.0,** plus 10/6 per set carriage and packing. BRITISH ISLES only.

N.B.—We do not issue lists or catalogues. Carriage Charges relate to British Isles only.

HIGH SPEED TWIN COIL ELECTRO MAGNETIC COUNTERS



Excellent quality in new condition. With 50 ohm and 1,500 ohm coils. 10 pulses per sec. approx. Counts to 9,999 and automatically returns to zero. 25-50-v. D.C. Size 3½ × 1 × 1in. Post and pkg. 9d. **22/6**

FLUXMETERS Model WY0023

Calibrated in three ranges, 500-1,000, 1,000-2,000, and 2,000-4,000 Gauss. Direct reading. Complete with polarity indicator and probe for minimum gap of 1¼in. Brand new in portable wood case with carrying handle. 12 × 9 × 5½in. Less battery. Carr. and pkg. 5/- **£4.5.0**

WALKIE-TALKIE. Mk18 Transmitter and Receiver Set. 6-9 Mc/s. Size 17 × 5in., weight 19 lbs., with valves. Carr. pd. **£5.0.0**

2 only Cossor **DOUBLE BEAM OSCILLOSCOPE** No. 3339. **£37.10.0** each. Carr., etc., 20/-.

WANTED TEST EQUIPMENT • COMMUNICATIONS RECEIVERS • TELEVISION RECEIVERS, Etc.

23 LISLE ST. (GERrard 2969) LONDON, W.C.2

Closed Thursday 1 p.m. Open all day Saturday and weekdays 9 a.m. — 6 p.m.

NEW INERT CELLS

No acid or charging required. Suitable for battery sets, electric bells, etc. 1.5-v., **2/10.** Post 9d.

RELAYS AND KEY SWITCHES



LARGEST EX-GOVT. STOCK IN GT. BRITAIN

Types 600-3000 Relays — Siemens High Speed
Also A.C. 400 volts 50 cycles

Uniselector Switches, Telephone Switch-boards, Telephone Components, Plugs, Jacks, Handsets — **Government Contractors.**

JACK DAVIS (RELAYS) LTD. (Dept. W.)
36 PERCY STREET, LONDON, W.1
Phones: MUSeum 7960, LANgham 4821

NEW

SILVER PREPARATIONS
for
METALLIZING MICA and CERAMIC CONDENSERS

Full details and samples from:-

FACTICE & CHEMICAL SUPPLIES LTD.
4 Lloyd's Avenue, London, E.C.3
'Grams: Factice *Phone:* ROYal 1762

There are 8 different types of "ACRU" Neon Indicator Lamps

During the past three years over 200,000 "ACRU" Neon Indicator Lamps have been installed by hundreds of firms with not a single complaint about a failure.

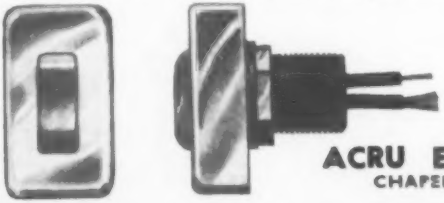

The Minimum life of "ACRU" Neon Indicator Lamps is 25,000 hours.

"ACRU" NEON INDICATOR LAMPS HAVE NO RIVALS AS REGARDS RELIABILITY.

ACRU ELECTRIC TOOL MFG. CO., LTD.,
CHAPEL STREET, LEVENSHULME, MANCHESTER, 19
Tel. RUSholme 4613

WHAT IS THE VALUE OF CONSTANT VOLTAGE?

The value of industrial processes completed without interuption? Of work in laboratories, hospitals, etc., saved from spoilage? Certainly it is more than the modest cost of the

FIELDEN SERVO A.C. VOLTAGE REGULATOR

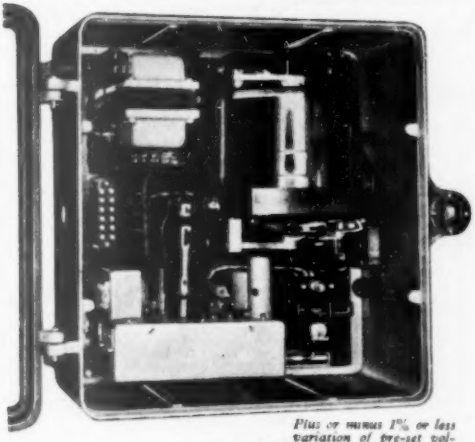

Plus or minus 1% or less variation of pre-set voltage. For single-phase 50 cycles 190/260 volts supplies. Output 500 V.A.

NO WAVE-FORM DISTORTION AND UNAFFECTED BY FREQUENCY CHANGE

Fielden
INSTRUMENTATION
COVERS MOST PHYSICAL MEASUREMENTS

Please send for Leaflet 205.
FIELDEN (ELECTRONICS) LTD,
"H" Block, Paston Road, Wythenshawe, Manchester
also at London, Philadelphia and Melbourne.

They get around!

Made by people with a conscience

COUNTRIES IN WHICH
SAVAGE TRANSFORMERS
ARE IN USE

SPAIN	PORTUGAL	PAKISTAN
CANADA	NEW ZEALAND	BRAZIL
AUSTRALIA	MALTA	SAN SALVADOR
MALAYA	RHODESIA	IRAQ
FINLAND	SWEDEN	ITALY
INDIA	SWITZERLAND	ISRAEL
CHINA	UNION OF S. AFRICA	LIBYA
U.S.A.	BELGIUM	MEXICO
IRAN	EGYPT	CYPRUS
IRELAND	GIBRALTAR	ARGENTINE
JAMAICA		SIERRA LEONE

SAVAGE TRANSFORMERS OF DEVIZES LIMITED

Nursteed Road, Devizes, Wilts. Telephone: Devizes 536.

FIRST RELEASE OF

THE "LINCOLN" TUNER



A three waveband high quality radio unit with three positions of selectivity and maximum bandwidth of 18 Kcs ; and gramophone pre-amplifier with compensation for (a) EMI 78's ; (b) DECCA 78's and (c) EMI and Decca L.P.'s.

PRICE: £15 15/-

PUR. TAX. £7/11/7.

"LINCOLN" HI-FI AMPLIFIER



A novel arrangement in this amplifier permits connection of output valves as either TRIODES or TETRODES with outputs of 3 or 10 watts. Bass and Treble lift and cut. Negative feedback.

PRICE : 18 Gns.

"Q-MAX" ABSORPTION WAVEMETER

for checking harmonics and parasitics, and oscillators, doublers and power amplifiers for correct frequencies. 35/- with one coil (extra coils 5/- each).

ALWAYS IN STOCK

LEAK & QUAD amplifiers and tuner units.
WILLIAMSON & GARNER specified components.
ARMSTRONG chassis.
GRAMOPHONE motors.
BARKER, WHARFEDALE, GOODMAN & WB Speakers.
RIBBON, CRYSTAL & M.C. Microphones.
EVERYTHING FOR THE "HAM."

CLIFTON Home Recorders, Desks and half desks; WEARITE Tape Deck and the new SCOPHONY BAIRD recorders available from stock.

"Q-MAX" RV2-A VHF CONVERTOR

Range from 18 to 200 Mcs in 6 Mono-unit plug-in coil stages. Output frequency 14.4 Mcs. PRICE : 16 Gns. with one coil unit (extra units 30/- each).

"Q-MAX" GDO-1A GRID DIP OSCILLATOR

with built-in power pack. Coil ranges from 1.5 to 300 Mcs. PRICE : 12 Gns. complete with all coils.

"Q-MAX" CHASSIS CUTTERS

Used all over the World.

The easiest and quickest way of cutting holes in sheet metal. Sizes from ⅜" to 2¼" round and 1" square.

Price list on application.

TAPE RECORDING

WE CAN NOW SUPPLY **ALL PARTS** FOR YOU TO **BUILD YOUR OWN DESK**

SEND STAMPED ADDRESSED ENVELOPE FOR SPECIAL LIST

BERRY'S (SHORT WAVE) LTD.

25 HIGH HOLBORN, LONDON, W.C.1

TEL.: HOLBORN 6231

HAVE YOU REGISTERED FOR OUR 1953 FULLY ILLUSTRATED CATALOGUE 6d POST FREE

ALL **VIEWMASTER** COMPONENTS FOR **KIRK O'SHOTTS HOLME MOSS WENVOE SUTTON COLDFIELD and LONDON**

G2AK *This Month's Bargains* **G2AK**

PARMEKO H.D. SHROUDED CHOKES. 8H at 250 mA. Weight 11 lbs. 16.6 each. Post and packing 1/6.

1,000 μF, 15 V. CONDENSERS, 2/6 ea.

TWIN RIBBON FEEDER. Heavy duty 300 ohm, 5d. per yd. Standard K25 300 ohm ribbon, 9d. per yd. Co-axial cable, ¼in. dia. 50 ohm, 8d. per yd., ⅛in. dia., 1.3 per yd. 7ft. length ¼in. dia. Co-axial with Pye plug one end, 1/6, post free. All other Co-axial and feeder, plus 1/6 post any length.

POTENTIOMETERS. Carbon Type Potentiometers, 50 k., 25 k., 1 meg., 2 meg., 1/6.

TRANSMITTING TUBES. Type 813 New and Boxed £3/10/- each. Type 866A., 17/6 each. 3E29 (829B), £4/10/- each. Few only.

METERS. 2½in. Flush mounting M.C. 100 m.a., 12/6 each ; 2in. Flush M.C. 5 m.a., 7/6 ; 0.5 amp. thermo., 5/- ; 4 amp. thermo., 5/-.

RACK MOUNTING PANELS, 19in. x 5¼in., 7in., 8¾in., or 10½in., black crackle finish, 5/9, 6/6, 7/6, 9/- respectively, postage and packing 1/6.

JONES PLUGS. 8-pin, male and female, 1/6 per pair, 12/- per dozen pairs.

SHROUDED M.C. MIKE TRANSFORMERS. M.C. mike or line to grid, 5/- each. P. & P. 1/-.
M.C. Mike, 2/-.

CARBON MIKE TRANS., 2/- each. P. & P. 6d.

COMPLETE SET (14) TUBES, for AR88 Receivers, £5/10/-.

TAPE RECORDING EQUIPMENT. Decks by Bradmatic, Tamsa, Lane and Qualtape. Ex. stock. Heads, Oscillator Coils, Tape and Reels always available.
Carriage paid on all orders over £1 except where stated. Please include small amount for orders under £1.

Please print your name and address.

CHAS. H. YOUNG, G2AK

All callers to **110 DALE END, BIRMINGHAM**
'Phone : CENTRAL 1635.

Mail Orders to **102 HOLLOWAY HEAD, BIRMINGHAM**
'Phone : MIDLAND 3254.

POLYTHENE

H. F. EQUIPMENT

(AMBYTHENE BRAND)

COIL FORMERS
CHOKES
STAND-OFFS
FEED-THROUGHS

Send for particulars and Samples

AMPLEX APPLIANCES (KENT) LTD.

19 DARTMOUTH ROAD, HAYES, BROMLEY, KENT
(RAVensbourne 5531)

All export enquiries to
ANTEX LTD., 3, TOWER HILL, LONDON, E.C.3.

THE WORLD'S GREATEST BOOKSHOP

FOYLES

FOR BOOKS

Stock of over 3 million volumes

New, secondhand and rare Books on every subject. Large Technical Dept.

Subscriptions taken for magazines.

119-125 CHARING CROSS ROAD LONDON W.C.2

Gerrard 5660 (16 lines) ★ *Open 9-6 (Thurs 9-7)*

Nearest Station : Tottenham Court Road.

Wharfedale PURCHASE TAX ON LOUDSPEAKERS

Chassis	List Price	Purchase Tax	Total
Bronze 8	48 -	21/3	69/3
Bronze 8 with Univ. Transformer	64 -	28 4	92 4
Super 8	85 -	37 8	122 8
Super 8/CS	95 -	42 1	137 1
Super 8/CS/AL	100 -	44 4	144 4
Bronze 10in.	69 6	30 10	100 4
Bronze 10 in. with "P" Type Transformer	78 -	34 7	112 7
Golden 10in.	115 -	51 -	166 -
Golden/CSB	125 -	55 5	180 5
W.10/CS or CSB	185 -	82 -	267 -
W.12	185 -	82 -	267 -
W.12/CS	195 -	86 5	281 5
Super 12/CS/AL	320 -	141 10	461 10
W.15	310 -	Nil	310/-
W.15/CS	320 -	Nil	320/-

Sand-filled Corner Assembly	List Price £ s. d.	Purchase Tax £ s. d.	Total £ s. d.
Complete with W.15/CS Separator and Super 5 Baffle	57 3 6	3 8 9	60 12 3
or with Super 8/CS Baffle	58 17 6	3 17 7	62 15 1
Super 8/CS Baffle with aluminium Speech Coil	59 2 6	3 19 10	63 2 4
or with W.10/CS Baffle	64 17 6	6 10 9	71 8 3

Wharfedale 3 Speaker System	List Price £ s. d.	Purchase Tax £ s. d.	Total £ s. d.
Twin Treble Assembly (W.10/CS and Super 5)	21 0 0	9 6 2	30 6 2
W.15/CS Sand-filled Enclosure	47 0 0	Nil	47 0 0
Three-way ⅓ Section Crossover Unit	8 10 0	Nil	8 10 0
Complete	76 10 0	9 6 2	85 16 2

Golden Corner Panel	List Price £ s. d.	Purchase Tax £ s. d.	Total £ s. d.
Complete with Top and with Golden/CSB Unit	18 10 0	8 4 9	26 14 9

SEPARATE BAFFLES, AVAILABLE TAX FREE WITHOUT LOUDSPEAKER UNITS.

	Price Tax Free
Non-resonant Sand-filled Corner Panel with ¾in. top, in Walnut, Oak, or Mahogany	£31 0 0
Sand-filled Back Panels 40in. x 24in. to match per pair	£12 0 0
W.10/CS Baffle	£5 10 0
Super 8/CS Baffle	£4 0 0
Super 5 Baffle	£2 15 0
GOLDEN Sand-filled Corner Panel, with top	£12 5 0
Sand-filled Back Panels 36in. x 19in. to match per pair	£5 10 0

WHARFEDALE WIRELESS WORKS
BRADFORD RD., IDLE, BRADFORD, YORKS
Phone: IDLE 461 Grams: WHARFDEL, IDLE, BRADFORD.

RADIO ENGINEERING OF SURPASSING EXCELLENCE

THE
EDDYSTONE
MODEL '680X'
COMMUNICATION RECEIVER
30 Mc/s to 480 Kc/s

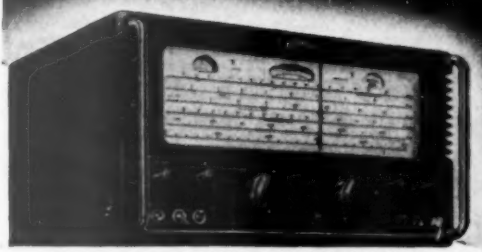

USED PROFESSIONALLY IN ALL PARTS OF THE GLOBE

Compare critically the Eddystone "680X" against world-wide production of similar equipment and you will find nothing to equal either the performance or the construction of this receiver at anywhere near its price level.

The solid diecast chassis ensures robust mechanical strength and rigidity and adds to the electrical screening. The large open dial is accurately calibrated and permits precise tuning and re-setting. The flywheel-controlled, geared tuning mechanism is a masterpiece of light engineering; its perfection can only be judged by practical experience.

The "680X" has a first-class electrical specification. Fifteen valves are used; two RF and two IF stages, separate oscillator and push-pull output. Figures for sensitivity, noise, selectivity and image ratio are excellent. Frequency drift is negligible on all ranges.

The "680X" receiver is handsomely finished in polychromatic grey and has an all-round performance of the highest order.

LIST PRICE (in U.K.) £106 - 0 - 0

Please write for full specification to the manufacturers:

STRATTON & CO. LTD., EDDYSTONE WORKS, BIRMINGHAM 31

MODERN ELECTRICS LTD.,

164, Charing Cross Road, London, W.C.2. 'phone TEMple Bar 7587.

Export enquiries welcomed. *Immediate delivery from stock.* *Prompt attention to post orders.*

TAPE RECORDERS

SOUNDMIRROR
Table Model £69 10 0
Portable £74 10 0
SCOPHONY-BAIRD
New Model Mk. 2, complete £88 5 0
SIMPHONIC
Model 2B £60 0 0
REFLECTOGRAPH
Continuously Variable From 2in.-8in. per sec., separate Record and Play back Heads, Twin Track £90 0 0

RECORDING TAPE

SOUNDMIRROR
Paper Tape £1 5 0
Spare Spool 6 6
E.M.I. H.60, 1,200ft. £1 15 0
E.M.I. H.60, 600ft. £1 1 0
E.M.I. H.65, 1,200ft. £1 15 0
E.M.I. H.50, 1,200ft. £2 8 0
SCOTCH BOY
1,200ft. £1 15 0
SCOTCH BOY, 600ft. £1 1 0
Spare Spools, 1,200ft. 4 0
Spare Spools, 600ft. 3 9
E.M.I. H.57, 3,250ft. £6 0 0
"Magnetic Recording," by S. J. Begun £1 5 0

VALVES

We are one of London's Largest Stockists — Please write for requirements.

RECORD REPRODUCING EQUIPMENT

DECCA
2-speed Motors, complete with Turntable and Rubber Mat £3 18 6
3-speed, complete £4 8 6
B.S.R.
3-spd. (Crystal T.O Hds.) £9 19 11
3 spd. (with 2 GP20 Hds.) £11 16 6
3 spd. (with 2 Decca Hds.) £13 10 6
3 spd. Auto-Mixer £17 17 0
GARRARD
RC.72A (3-spd. Auto) £16 6 6
COLLARO
3RC511 (3-spd. Auto Dual Purpose Head) £15 10 6
3RC511 (3 spd. with 2 Hds.) £18 14 0
3RC521 (Auto-Mixer) £21 2 7
CONNOISSEUR
2-spd. Motors £22 18 8

SPEAKERS IN STOCK

GOODMANS
Axiom 150, Mk. 2 .....
Audium 60 .....
WHARFEDALE
W.12.CS .....
Golden 10C.S.B. .....
Super 8CS.AL .....
Bronze 10 .....
Bronze 8 .....

TEST GEAR

AVO
Model 8 ..... £23 10 0
Model 7 (latest) £19 10 0
Uniminor Mk 1.2 ..... £10 10 0
Universal Bridge £34 0 0
Wide Band Sig. Gen. £30 0 0
Valve Characteristic Meter £60 0 0
D.C. Minor £5 5 0
10 kV. Multiplier for Model 8 ..... £2 5 0
Carrying Cases for Models 7, 8 and 40 ..... £3 0 0
ADVANCE
H.1 (Sig. Gen.) £25 0 0
E.2 (Sig. Gen.) £28 0 0
PIFCO. Radiometer £1 9 6
COSSOR
Double Beam £93 10 0
Oscilloscope Single Beam £28 0 0
TAYLOR
ALL NEW TAYLOR TEST GEAR IN STOCK AND AVAILABLE ON H.P. Send S.A.E. for Catalogue and Terms.

PICK-UPS

ACOS
G.P.20 (Std. or L.P.) £3 11 5
Spare Heads for above £2 3 4
DECCA
XL.T.O £3 19 2
XMS. Magnetic £7 0 0
CONNOISSEUR
Super Lightweight, LP.Std. £10 8 8
Spare Heads £3 11 8

LEAK PICK-UPS
Dynamic (Ruby Stylus) £12 0 0
Dynamic (Diamond Stylus) £18 8 4

MICROPHONES

ACOS
Mic 22 (Crystal) £6 6 0
Mic 22 (head only) £4 10 0
Mic Inserts for above £1 9 6
Mic 16 (Crystal) £12 12 0
Mic 30 (Crystal) £4 4 0
SOUNDMIRROR
M.C with T.F. £7 7 0
LUSTRAPHONE
M.C. with T.F.C.S1 ..... £5 15 6
M.C less T.F.C.S1 ..... £5 5 0
Heavy Table Base for above £1 1 0
Hand M.C. with T.F. CH.S1 ..... £5 6 0
Hand M.C. less T.F. CH.S1 ..... £5 15 6
RESLO M.C (Low Imp.) £6 0 0
RIBBON £7 5 0
FLOOR STAND (Microphone), 3 extensions £3 12 6

LEAK AMPLIFIERS
Point 1, TL12 ..... £38 7 0
Point 1, TL25 ..... £34 7 0
Control Unit £12 12 0

CONNOISSEUR AMPLIFIERS
Q.25, in Cabinet £48 10 0
Q.25, less Cabinet £41 5 0

TAPE DECKS
SOUNDMIRROR—With Complete Instructions for Associated Amplifier ..... £33 0 0, carriage extra.
WEARITE (limited stock), with Complete Instructions for Associated Amplifier, £35 0 0, carriage extra.

AMERICAN TRANSMITTER SPARES

We hold very large stocks of manufacturers' spares including

SWITCHES
METERS
TRANSFORMERS
COILS
CONDENSERS
VALVES, etc.

Particularly for RCA Transmitters ET 4336 and Hallicrafter BC.610.

We shall be pleased to receive your enquiries.

THIS MONTH'S SELECTED ITEMS

METERS—FERRANTI Moving Coil Meters 0-500 micro-amps, Dia. 2½", Flush mounting. 45/- each.

HALLICRAFTER SX28 & RCA AR88 S Meters, 45/- each.

We wish to purchase large or small quantities of American transmitter spares or complete equipment.

McELROY-ADAMS MFG. GROUP LTD.

(Sole concessionaires U.K. for Hallicrafter Communication Equipment)

46, GREYHOUND ROAD, LONDON, W.6

Cable: Hallicraft, London. *Phone: Fulham 1138/9*

TELEVISION

for "Fringe" and "Long distance" viewers is vastly improved with the SPENCER-WEST type AC.3 Pre-Amplifier. The specification includes a first stage neutralised triode cathode coupled to a grounded grid triode. The optimum arrangement for best "noise factor". Self-contained power supply unit complete with correctly adjusted interference filter. Price complete, 10 gns. from your dealer or direct. Leaflets, etc. on request.

WENVOE CONVERSION

Type AC.4 WL (Wenvoe London) and Type AC.4 WB (Wenvoe Birmingham) Converter units for perfect simple conversion of your receiver. Price complete with 5 valves and self-contained power supply unit, 15 gns. Descriptive leaflet on request.

SPENCER-WEST
QUAY WORKS, GT. YARMOUTH

Phone: Gt Yarmouth 3899

DECALS

THE MODERN TRANSFER FOR MARKING CONTROL PANELS ON RADIO AND ELECTRONIC EQUIPMENT

Bold white lettering ¼" high · Supplied in books of six pages totalling 500 different words, or equivalent in letters or numerals · Covers various branches of electronics · For Research Labs. · Repair Establishments · Amateurs.

CONVENIENT · EFFECTIVE · INEXPENSIVE

Price 4/9 per book. (Post 3d.)

ALEXANDER EQUIPMENT LTD.
CHILDS PLACE, EARLS COURT, S.W.5

Phone:—FRO 6762

miniature in size...

mighty in performance



Little wonder that OSMOR "Q" RANGE COILS are the "big noise"... No imitations, regardless of price, can compare with them for super selectivity and sensitivity. And you don't just have to take our word for it—the watertight guarantee makes your satisfaction certain!

Consider these points of superiority :—

★ Only 1in. high. ★ Packed in damp-proof containers.

★ Variable iron dust cores. ★ Low loss Polystyrene formers. ★ Fitted tags for easy connection.

COILPACKS. A full range is available for Superhet and T.R.F. Mains or Battery. Size only 1⅞in. high × 3¼in. wide × 2¼in. Ideal for the reliable construction of new sets, also for conversion of the 21 RECEIVER, TR 1196, TYPE 18, WARTIME UTILITY and others.

MATCHED COMPONENTS. Various types of OSMOR Dials, Chassis, I.F.S. Speakers, Transformers, etc., etc., to match our coils and coilpacks are all listed.

Send 5d. (stamps) for **FREE CIRCUITS** *and full list of coils, coilpacks and radio components.*

Aligned and tested, with full circuits, etc. Fully descriptive leaflets available.

WARNING! Avoid inferior imitations. Genuine OSMOR *Coilpacks are sold only under the name* OSMOR.

OSMOR *radio products ltd*

(Dept. W.34) BRIDGE VIEW WORKS, BOROUGH HILL, CROYDON, SURREY. *Telephone :* **Croydon 5148/9**

MIP

Manufacturers of Ammeters, Voltmeters, Ohmmeters, Watt-meters and frequency meters for switchboard or portable use.

MULTI-RANGE TEST SET SERIES 100

The Universal testing set for Service Engineers. Sensitivity 10,000 ohms per volt. Strong metal case with carrying handle, complete with leads having detachable bulldog clips and test prods. Size 9 x 5½ x 4 ins.

MEASURING INSTRUMENTS (PULLIN) LTD.
Electrin Works, Winchester Street, London, W.3
Tel.: ACOrn 4651/3 and 4995

RANGES

AC/DC VOLTS: 10, 25, 100, 250, 500, 1,000.
DC MILLIAMPS: 2.5, 10, 25, 100, 500.
AC/DC MICROAMPS: 100 Microamps 10v range.
RESISTANCE RANGES: 0/1 Meg (13,500 ohms mid-scale) 0/10,000 ohms (135 ohms mid-scale).

NEW "PRINCIPLE" RECORDER TABLE

BY QUALTAPE

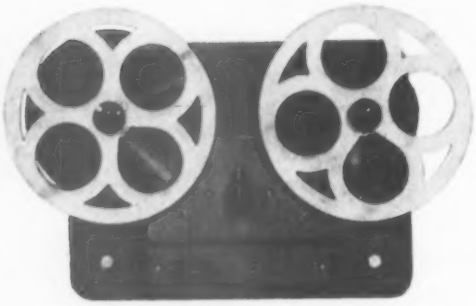

Examine these new features:-

- ★ 2-speed, giving 7½ and 15 in. per second.
- ★ Self oiling, self aligning bearings.
- ★ Fixed motors.
- ★ New "gyro" drive principle.
- ★ Rewind by turn of switch.
- ★ All spindles centreless ground.
- ★ Brake fitted.
- ★ Reels fit solid.
- ★ Operates flat, sloping or upright.

Demonstrations with pleasure.

We are proud to present this superb example of British design and workmanship.
Particulars and illustrated brochure from:-

ELECTRONIC SERVICE (HALLAMSHIRE) LTD.,

93-95, BUTTON LANE, SHEFFIELD.

TELEPHONE NUMBER:- SHEFFIELD 21690. TELEGRAPHIC ADDRESS "QUALTAPE", SHEFFIELD.

ARTHURS HAVE IT!

LARGE STOCKS OF NEW VALVES

TEST METERS IN STOCK

"AVO" "TAYLOR" TEST METERS, SIGNAL GENERATORS AND MEGGERS IN STOCK

Leak Point One Amplifiers	£28	7 0
Peak Pre-Amplifiers	9	9 0
Leak Tuning Unit	38	5 0
Chapman Tuning Units	17	6 8
Crystal and Moving Coil Microphones. Decca Replacement Heads and Pickups.		
Goodmans Axiom 150 Speakers	10	5 6
Partridge Output Transformers for Williamson Amplifiers	4	12 0
Cossor Double Beam Oscilloscope 1035	93	10 0
Cossor Double Beam Oscilloscope 1049	132	0 0
Wright & Weaire Tape Deck	35	0 0

LATEST VALVE MANUALS

MULLARD, OSRAM & BRIMAR No. 4, 5 - each.
MAZDA 2 - each.
Postage 6d. extra

TELEVISION SETS, WIRE AND TAPE RECORDERS ALWAYS IN STOCK.

Goods offered subject to price alterations and being unsold

Arthurs EST. 1919

PROPS: ARTHUR GRAY, LTD. **first**

OUR ONLY ADDRESS: **Gray House**

150-152 Charing Cross Road, London, W.C.2

TEMple Bar 5833/4 and 4765

TELEGRAMS—"TELEGRAY, WESTCENT, LONDON"
CABLES—"TELEGRAY, LONDON"

MAINS SIGNAL LAMP
LIST No. D.650

BULGIN RELIABLE RADIO & ELECTRONIC COMPONENTS ARE BACKED BY 25 YEARS, EXPERIENCE IN THE FIELD OF ELECTRONICS

BULGIN *Components*

A. F. BULGIN & CO. LTD., BARKING, ESSEX.

PRATTS RADIO

1070 Harrow Road, London, N.W.10

(Nr. SCRUBBS LANE)

Tel.: LADbroke 1734



MODEL AC10E £19/7/6

AMPLIFIERS. College general purpose units. **MODEL AC10E,** 4 valve 10 watts. Neg feedback. **£10/7/6. MODEL AC15E,** 6 valve 15½ watt P/P output. Feedback over 2 stages. **£15/5/-. MODEL AC22E,** 22 watts P/P output. Feedback over 3 stages, **£18/18/-. MODEL U10E,** for DC/AC mains,6 valve 10 watt P/P output. Feedback over 3 stages, **£12/19/6.** All are complete with cases and chrome handles. They have a separate microphone stage. Separate inputs for mike and gram., allowing individual mixing, etc. Outputs match 3, 6 or 15 ohms speakers. Max. inputs volts required for full stated output average Mike .003, Gram. .3 v. **MODEL AC8C,** 5 valve P/P 8-10 watt unit for records, radio, etc. Feedback over 2 stages. Output to 3, 6, 15 ohms. **£10/10/-. MODEL AC4C,** 3 valve record/radio amplifier, 4 watts to 3 ohms. **£5/15/-.** Ditto U4C for DC/AC mains **£5/15/-.** Stamp for list. Full range of accessories available including: Rothermel Crystal Mikes, **10/6;** Goodmans 12in. P.M. speaker, **£9/12/6;** Collaro A.C. Record Players, rim drive, magnetic model, **£6/7/6,** Crystal, **£6/15/-.** Jack plugs **2/-** each extra.

All amplifiers are complete and ready for use.

22 Years unrivalled experience and careful design has resulted in the . . .

Armstrong

CONSOLE MODEL T.V. 15

The set, incorporating a 12in. C.R.T. and 10in. Loudspeaker, operates on A.C. Mains 200/250 v., is now available in a beautifully veneered two-tone walnut cabinet 35in. high 20in. wide 20½in. deep. There are two main controls, sound volume and picture brightness, situated on the front of the cabinet and the usual pre-set controls are on the side.

PRICE 63 Gns. Tax Paid

The usual ARMSTRONG GUARANTEE "Purchase money refunded in full if dissatisfied" is in force and a Comprehensive Maintenance Scheme is available to cover replacement C.R.T. and Valves. Installation in the home is free and erection of aerial can be arranged at moderate cost.

H.P. TERMS AVAILABLE

OTHER MODELS IN THE ARMSTRONG RANGE include :

MODEL EXP. 125/3 14-valve all-wave Radio-gram chassis. A.C. Mains £36/15/-, plus P.T.

MODEL RF.104 10-valve all-wave Radio chassis. A.C. Mains, £24/-/-, plus P.T.

MODEL EXP. 73 8-stage all-wave Radio chassis. A.C. Mains £17/15/-, Plus P.T.

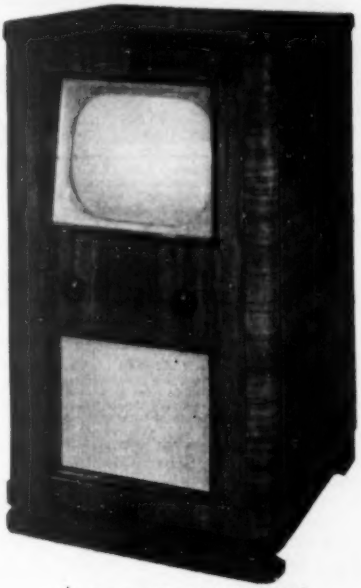

The Armstrong Console Model T.V. 15

For further details write to :

ARMSTRONG WIRELESS & TELEVISION CO. LTD.

Warlters Road, Holloway, London, N.7. :: :: :: *Telephone :* **NORTH 3213-4**

To Set Designers

We pay our several competitors the compliment of watching with close interest what they do and say. But we do *not* fear comparison with them.

On the contrary, we are proud enough of our own design technique and production methods to be willing at all times to discuss them with interested radio engineers. Will you give us the opportunity ?

R&A

Loudspeaker Manufacturers to the radio industry since 1930

REPRODUCERS AND AMPLIFIERS LIMITED

WOLVERHAMPTON . ENGLAND

Telephone : Wolverhampton 22241 (5 lines) Telegrams : Audio, Wolverhampton

BETTER RECEPTION with Aerialite AERIALS

RADIO AERIALS—The signal pick-up qualities of **Aerialite** radio aerials are well known. The "Mastatic" and "Antistatic" vertical rod aerials ensure interference-free reception on all wavebands. The "Trapeze" and "Anomast" aerials are inexpensive and very effective. For horizontal radio aerials Aerialite all-copper "Aerial Wire" is still supreme. Prices for **Aerialite** aerial wire are :—50ft. 4/-, 75ft. 6/-, 100ft. 7/6.

TELEVISION AERIALS—The **Aerialite** range covers all types from the "AERFRINGE" 3 element folded dipole aerials (illustrated) to the "AERADOOR" room or receiver mounting single dipoles. Designed to give maximum electrical performance and robust mechanical construction. Prices from 13/6. There is a model to suit all locations and all pockets.

choose your aerial as carefully as



CAR AERIALS—Whatever the make of car, there is a suitable **Aerialite** car aerial made to provide high gain trouble-free radio reception. Types available for header, scuttle, wing or under-the-car mounting. All fully weatherproofed. Model 17 (illustrated) for header-mounting, with telescopic aerial tubes, fully chromed and waterproofed. Price 32/6.

ACCESSORIES—**Aerialite** manufacture all accessories for use with aerial equipment. Including—Mains Suppressors, H.F. Coaxial and Balanced Twin Feeder Cables, Coaxial Plugs & Sockets, Connector Boxes, Gutter Brackets, Line Connectors, Earth Rods, etc.

you choose your set.

★ ***The safeguard for all receivers.*** The new **Aerialite** Neon LIGHTNING ARRESTOR

Aerialite AERIALS

AERIALITE LTD. CASTLE WORKS, STALYBRIDGE, CHES.

Have you had a copy of our "Scope" Circuit? Shows how to convert any ex-W.D. scope unit to a standard "Scope," 2/9.

Type 2—Crystal **MONITORS**. Make excellent signal generators, 12/6 each.

VALVES. 154, 10/6; 6AG5, 10/6; 117Z6, 12/6; 6SH7, 6/6; EF50, 8/6; 955, 954, 6/-; SG215, 6/6; Pen 220A, 6/6; TT11, 8/6; VR150, 10/6; 42, 10/6.

RP24 UNITS. Converted to 28 Mc/s Band. Variable tuned with 100-1 geared S.M. Dial. Complete with plug and leads for immediate use, £3/5/-.

MAINS TRANSFORMERS. Input 200/240 v. Output 350-0-350 or 250-0-250 volt, 80 mA and 4 and 6.3 v. 4 a. and 4 and 5 v. 2 a. Price 21/6. Input 200/240 v. Output tapped 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24, 30 volts, 2 amps., 21/6. All with one year's guarantee.

NEW MINIATURE VALVES. DL72, CK512AX, 9/-; 6AG5 10/6; 9001, 9002, 7/6; 9003, 7/6.

D.P.D.T. RELAYS. Operate at 200/300 volts D.C., 8/6. D.P. make and break, 8/6. We can supply any type of voltage and contacts at varying prices.

NEW SELENIUM RECTIFIERS. F.W. 12/6 volt 3 amps., 14/6; 4 amp., 25/-; 6 amp., 30/-; ½ amp., 5/6.

10HY. 120 mA BRASS SHROUDED CHOKES, 7/6.

TYPE IN34—GERMANIUM CRYSTAL DIODES, 5/6.

POLAR—TWO-GANG VARIABLE CONDENSERS. .0001S Mfd. Large quantity available. New, offers please.

B.C. 603 RECEIVER AND B.C. 604 TRANSMITTER. 20 to 28 Mc/s. Including 80 Crystals, £35, carriage extra.

U.S. MANUALS for Test Equipment 1E-56-A; SCR-729-A and SCR729AZ. Contains all the gen on Freq. Meter B.C. 906, Receiver B.C.1066 and Sig. Gen. 1-196-B. 21/-.

New and Boxed Type T.C.C. CP58QO, 1 mfd. 7 kV Condensers, 10/6 each. 1 mfd. 2.5 kV, 5/6.

VCR97 CRTs. New and crated. Picture tested, 45/-. Bases 3/6.

M.C MICROPHONES with Matched Trans., 12/6.

ARMY MORSE KEY & BUZZER PRACTICE SETS 7/6.

NEW P.M. SPEAKERS. 5in. 14/6, 6in. 16/6, 8in. 20/-, 10in. 29/6. Goodman 10in. 32/6.

All the above Post Paid from Dept. W.W.,

The RADIO & ELECTRICAL MART

253B PORTOBELLO ROAD, LONDON, W.11

Phone: PARK 6026

WILL BUY any U.S. surplus radio parts, equipment

*

APN-9, TS-67, R-89B/ARN-5, ARC-1, ARC-3, ART-13, BC-221, BC-348, SCR-522, MN-53, MN-61, RA-1, MN-31, MI-32, ARN-7, Headsets, Mikes, Cannon Amphenol plugs, 274-N, ARC-5, Dynamotors, Test sets, "TS-" or "1-" prefixes.

State condition and Best Price

Aircraft Radio Industries, Inc,

85 St. John Street, New Haven, Conn., U.S.A.

NORMAN H. FIELD 60, HURST STREET, BIRMINGHAM, 5

Mail Order Department

64-65, CHURCH LANE, WOLVERHAMPTON

CRYSTAL MONITORS. (Less valves and Crystal)..... 7 6
Ideal for Ham use. Easily modified to Mains use with our simple circuit. 1/- extra.

E.H.T. TRANSFORMERS. 2,500 v. 5 mA 4 v. 2 amps. 0. 2.4 at 4 amps. 210-250 v. 50 Cycles. Completely wax impregnated GUARANTEED..... 42 6

TRANSFORMERS MAINS. Input 230 v. A.C. Output 18 v. 26 v.-44 v. at 2 amps..... 12 0

BATTERY AMPLIFIERS A1368. Complete with VR35 and VR21 valves. For use as intercom. or with slight alteration as Gram. Amplifier. In metal case 7 x 4½ x 4½in. With carrying case 1/6 extra. Circuit 1/- extra..... 15 0

1155 LOOP AERIALS..... 8 6

500 Kc/s CRYSTALS..... 7 0

METERS. Marked Air/Oil. Moving Coil basic. 200 micro-amps. Very sensitive. 2½in. sq..... 7 6

ROTARY CONVERTORS. Approx. 6 v. input and 22.. v. at 80 mA output..... 12 6

Please add something for postage.

Send for our fully illustrated Catalogue

WODEN

THE HEART OF EVERY CIRCUIT

is to be found in its Transformer, which, like the human heart must keep the lifeblood flowing evenly and constantly under both normal and abnormal conditions.

POTTED COMPOUND FILLED TRANSFORMERS AND CHOKES

manufactured by WODEN have been designed to fulfil such a purpose, and for this reason they have been standardized by many leading Radio, Television and Electronic manufacturers and also Government Research Departments. Their choice is only made after exhaustive tests for accuracy and reliability. To merit this confidence, there is a constant need to provide components of the highest quality and our ample research and testing facilities ensure continued progress in this direction.

WODEN TRANSFORMER CO. LTD.

MOXLEY ROAD · BILSTON · STAFFS.

TELEPHONE: BILSTON · 41959

J.T.L.

SELECTIVE TRANSMISSION MEASURING SET

B.C.C. introduce another outstanding success in their development of Measuring Instruments.

This instrument is a direct reading, selective, gain and loss measuring set to be used with an external signal generator.

Four terminal networks, active and passive, balanced or unbalanced, can be measured.

Facilities are provided for use as a high impedance Selective Detector Amplifier.

Frequency Coverage : 1—68 Kc/s in 4 ranges.

Range of Measurements : Gain 0-60 db. Loss 0-80 db.

Accuracy : ± 0.5 db.

Impedance range : 75, 150 and 600 ohms., balanced or unbalanced.

Det.-Amp. Sensitivity : 10-12 μV.

Power Supplies : 100-150-200-250v. 50 c/s.

Based on Signals Research and Development Establishment design.

Manufactured for Ministry of Supply and G.P.O.

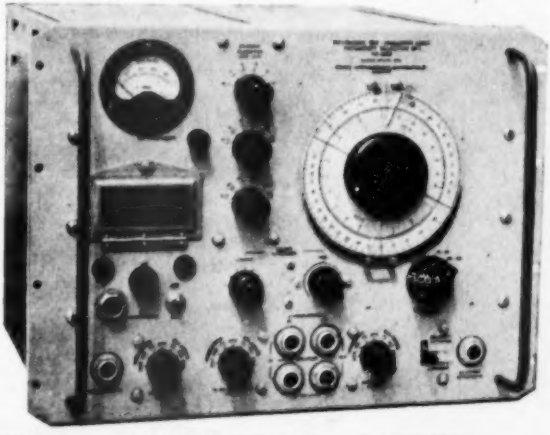

BRITISH COMMUNICATIONS CORPORATION LIMITED

31 GORDON AVENUE, STANMORE, MIDDX. GRIMSDYKE 2266 Cables : BEECEECEE, STANMORE

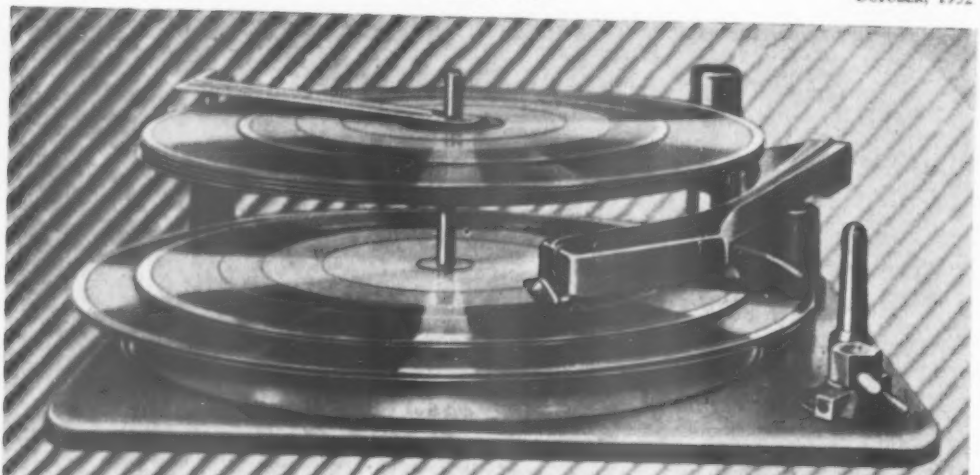

A record achievement

Discriminating listeners and manufacturers alike have acclaimed the Monarch auto-changer. Its unusual new features, its ease and simplicity of operation and its high standard of reproduction and performance have proved it a masterpiece in design and technical excellence.

Note these outstanding features.

★ Automatically selects and plays 7", 10" and 12" records, intermixed, at 33⅓, 45 or 78 r.p.m. Capacity, 10 records.
★ New record change mechanism virtually eliminates pause between records.
★ New reversible dual stylus crystal pick-up has extended frequency range to 10,000 c.p.s. Self compensated for the L.P. lower frequencies with the Turnover frequency at the correct point.
★ Pick-up automatically returned to rest position and motor switched off after last record.
★ Remarkably compact design makes it an ideal unit for the Radiogram/TV combination console.
★ Simplicity of design guarantees long life and trouble-free operation.
★ Beautiful styling and finish that will harmonize with any cabinet design.
★ Operates on 100/125-200/250 volts, 50 cycles A.C. Models also available for 60 cycles A.C.

BSR



The REGENT a beautifully styled three speed gramophone. Complete with ingenious automatic stop and light-weight high-fidelity turnover-type crystal pick-up fitted with two permanent sapphire styli.

Birmingham Sound Reproducers Ltd., Old Hill, Staffs. England. Grams. 'Electronic Old Hill, Cradley Heath.'

Wireless World

RADIO, TELEVISION AND ELECTRONICS

42nd YEAR OF PUBLICATION

Managing Editor : HUGH S. POCOCK, M.I.E.E.
Editor : H. F. SMITH

OCTOBER 1952

In This Issue

EDITORIAL COMMENT 383

RADIO EXHIBITION REVIEW 384

AIR RADIO DEVELOPMENTS 397

COMMERCIAL BROADCASTING 401

NEGATIVE-FEEDBACK TONE CONTROL. By *P. J. Baxandall* 402

" NO COMPROMISE " R.F. TUNER. By *W. Winder*. .. 406

HOW TO CHOOSE A VALVE. By *Thomas Roddam* 409

L/C RATIO. By " *Cathode Ray* " 412

WORLD OF WIRELESS 416

LETTERS TO THE EDITOR 419

ELECTRONIC SWITCHING. By *E. A. R. Peddle* 421

TELEVISION " A.G.C." CIRCUIT. By *G. F. Johnson*. .. 424

DELTA MODULATION 427

F.M. FEEDER UNIT—2. By *S. W. Amos* and *G. G. Johnstone* 428

EUROPEAN V.H.F. BROADCASTING 433

PROJECTION TELEVISION *versus* DIRECT VIEWING .. 435

RANDOM RADIATIONS. By " *Diallist* " 436

UNBIASED. By " *Free Grid* " 438

PUBLISHED MONTHLY (last Tuesday of preceding month) by ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1. *Telephone* : Waterloo 3333 (60 lines). *Telegrams* : "Ethaworld, Sedist, London." *Annual Subscription* : Home and Overseas, £1 7s. 0d. U.S.A. $4.50. Canada $4.00. BRANCH OFFICES : *Birmingham* : King Edward House, New Street, 2. *Coventry* : 8-10, Corporation Street. *Glasgow* : 26a, Renfield Street, C.2. *Manchester* : 260, Deansgate, 3.

tube economy

a very large number

of new television receivers are purchased on the recommendations of existing viewers. This is a continuing process which profoundly influences the expansion of television in this country.

The maintenance of high standards of reception is, therefore, important in more ways than one. Not only is it a source of satisfaction to the *existing* set owner but it is a definite encouragement to the *potential* set owner.

the cathode ray tube,

however, is a costly component. Prompt renewal of worn tubes is only reasonable if the average annual replacement cost is modest.

That is why Mullard have paid great attention to designing tubes which will maintain high performances over very long periods of service. The results of this policy are already apparent to setmakers, dealers and viewers alike.

Mullard

LONG-LIFE TV TUBES

MULLARD LTD · CENTURY HOUSE · SHAFTESBURY AVENUE · LONDON · W.C.2

MVM209

Wireless World

OCTOBER 1952 VOL. LVIII. No. 10

Keeping Up with the Comet

SOME months ago we claimed that radio was meeting the challenge of increasing aircraft speeds fairly satisfactorily, and that any weaknesses that might exist were brought about by organizational rather than technical shortcomings. Since then, critics have convinced us that we erred on the side of undue optimism. True, the troubles are agreed to be mainly organizational, but there is still room for technical development, and in any case we must bear some responsibility for the way our techniques are applied. We must now admit that the tempo of electrical communications and, perhaps to a lesser extent, the speed of operation and range of radio aids to navigation, have failed to keep pace with the needs of 500-m.p.h. aircraft. That can and must be remedied; after all, practical radio started before practical flying, and we still have a fundamental natural advantage in the matter of speed; radio "crashed through the sound barrier" from its inception!

Judging by an anonymous article in the normally ultra-cautious journal of the International Telecommunications Union (I.T.U.), Geneva, an unseemly wrangle is brewing between the I.T.U. and the International Civil Aviation Organization (I.C.A.O.) which clearly finds existing world communication networks inadequate for the needs of modern flying. The dispute seems at present to be on mainly legalistic questions. Should certain kinds of airline operational messages be handled by the airlines' radio or line circuits (owned or leased) or should they be passed over the systems of the national administrations comprising the I.T.U. membership? But the article also discloses that some communication administrations regard civil aviation as a competitor. The speed of transit of air mail letters is now approaching that of telegrams. Implicit in such an idea is the (unspoken) conclusion that it would be no bad thing to impose a little artificial drag or handicap on the aircraft in the form of still slower operational communications.

Such thoughts are abhorrent to *Wireless World* and we believe to most radio and communication people generally. The airline operators are our customers; they are always right, and now they are in a hurry as well. We do not agree, however, with the proposals that they should have their own world-wide networks for operational communications. That would be extremely wasteful of precious radio channels which would seldom be loaded to capacity. The economic and rational solution seems to lie in attuning the tempo of the public world communication system to the speed of jet aircraft. Of what value is it for air passengers and freight to be carried at high speed if we on the ground are not ready for them at the other end?

Reflections on the Show

BY all relevant criteria, the 19th National Radio Exhibition was a great success. Public attendance was significantly higher than last year, and the show certainly served as an attractive shop-window for British productions in the way of domestic sound and vision broadcast receivers. It would be churlish to complain that some branches of radio were not fully represented; indeed, it would probably be unreasonable to do so, as the art has now strayed into far more fields than could be covered by any single exhibition. The show at least succeeded in demonstrating to the lay visitor that there is more in radio than broadcasting.

Some of this year's innovations deserve serious consideration for the future. The technical training exhibit was, we imagine, much appreciated by younger visitors considering making their careers in radio, and might profitably be extended. We should like to see B.B.C. participation in this section, as the Corporation employs some novel and apparently highly effective instructional methods at its engineering training establishment at Wood Norton.

Television demonstrations have been well conducted for some years, and the potential viewer must have been well satisfied with the arrangements made at the present show for him to study the performance of various sets. Demonstrations of high-quality sound reproduction have generally been far less satisfactory, but this year the few efforts made to improve matters in this direction were very well received. In fact, the G.E.C. demonstration of stereophonic sound was widely acclaimed as one of the highlights of the exhibition.

Radio Exhibition Review

Trends in Television and Sound Receiver Design—and Some Highlights

In the following pages the technical staff of "Wireless World" report on tendencies in design in those branches of radio best represented at the 19th National Radio Exhibition. A description follows of aviation radio equipment as shown at the Farnborough Exhibition

TELEVISION RECEIVERS

THE straight t.r.f. television receiver, at one time the usual thing in this country, has almost disappeared, and nearly all makers now prefer the superheterodyne. This has come about through the increase in the number of television transmitters, for the superheterodyne lends itself to station selection much better than the t.r.f. set. Alterations to three or four circuits only are needed to change from one television channel to another.

This trend away from the straight set was obvious last year and has continued since then. In doing so, television has only followed in the footsteps of the sound-broadcast receiver, where for many years the straight set has been virtually dead. The fact that most television sets are now superheterodynes does not mean that they are all alike, however. In the detail of their circuitry, and often in its general form, they differ surprisingly.

Nearly every set has one stage of amplification at signal frequency. A few sets—notably those of Murphy Radio—have two such stages, but not one set without an s.f. amplifier was noted. Signal-frequency amplification is, of course, necessary to obtain a good signal-to-noise ratio; and the stage is also very desirable in order to minimize oscillator radiation. Almost invariably an r.f. pentode is used with single-tuned couplings, but some sets have a coupled pair between the s.f. valve and the mixer.

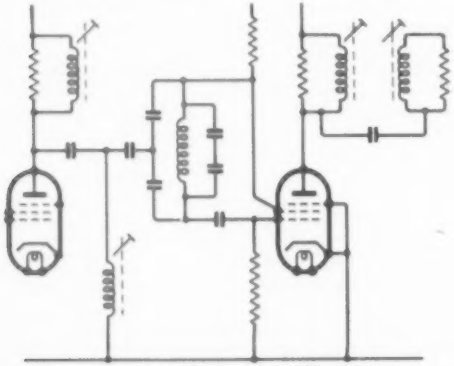

Fig. 1. Frequency-changer circuit of Ekco TC 185 television receiver.

The frequency-changer shows more variation. On the whole two-valve (or double-valve) types seem commoner than the single-valve, but the latter are well represented. Bush, for instance, still use the single-valve type with an r.f. pentode having the oscillator tuned circuit connected between the control and screen grids. The signal input is fed to a tapping at the null point on the oscillator coil. This form of circuit is also used in the Ekco receivers, as shown in Fig. 1. The oscillator is of the Colpitt's form with a capacitive tap at the null point. This is one set in which a coupled pair of s.f. circuits is used, the coupling being of the top-end capacitance type.

Pye adhere to the two-valve type of circuit, using a triode-pentode, in which the pentode acts as a mixer and the triode as an oscillator, control-grid injection being used. Quite a few sets, however, have a double-triode; notably, English Electric, Dynatron and Baird. Grid injection is usually employed, the two grids being joined through a small capacitance.

In so far as there can be said to be any general practice at intermediate frequency, it is to use two or three stages in the vision channel and two in the sound. On the sound side coupled pairs of tuned circuits are used for the intervalve couplings. On the vision side a similar arrangement is quite often used, but supplemented by sound-channel rejector circuits. However, stagger-tuned single-circuit couplings are quite common.

Pye adhere to the arrangement which they introduced last year of using four coupled circuits in cascade for each intervalve coupling. With three vision i.f. stages, there are sixteen tuned circuits in the four couplings and the selectivity is high enough to enable sound-channel rejectors to be dispensed with. This set, the FV2C, is also unusual in having three stages in the sound channel.

The cathode-trap form of sound rejector is much less often used than at one time and most rejectors are now simple wavetraps coupled in various ways to the main circuits of the intervalve couplings. The sound channel pick-out circuit can, and usually does, act as a rejector in the main video channel, but most sets have one or two rejectors in addition.

In the different designs the separation of the vision and sound signals takes place at various places. Sometimes it is immediately after the frequency-changer, sometimes one i.f. stage is common to both channels.

Reverting to the signal side, the methods adopted for station selection still vary considerably and are, in fact, much the same as last year. Bush still retain continuous tuning and Pye still use an arrangement

of tapped coils. Some other makers prefer a replaceable sub-chassis or plug-in coils, and there is still no uniformity of method, but there is a somewhat slow trend towards arrangements in which provision for every channel is built into the set. The dealer, and in some cases the user, can then adjust the set to the required channel without having to replace any parts.

All this variety of tuning methods suggests that the perfect arrangement has yet to be found, but on the video-frequency side of the sets there is much more uniformity. A diode detector is invariably used and is directly coupled to a pentode v.f. stage. This is usually directly coupled to the cathode of the c.r. tube but not invariably so. English Electric, for instance, feed the signal to the grid and have a clamp circuit to establish the black level.

The use of inductance to maintain the high-frequency response of the video stage is less universal than it used to be. It is now nearly always supplemented by a small capacitance across the cathode-bias resistor which gives compensation by reducing feedback at the higher frequencies. In some sets this is the only form of compensation used, but in many it is supplementary to inductance loading. In some it is a trimmer and is adjusted for optimum results in the factory.

Most sets have a simple shunt diode noise limiter, which is sometimes a germanium crystal, with a bias control to set the limiting level. Some makers fit it to the video stage input, others to its output. On the sound side a series diode limiter is commonly used and requires no adjustment.

The modern tendency is all towards large cathode-ray tubes with large deflection angles—nominally 70°. The large screen area demands high-voltage operation if an adequately bright picture is to be obtained and this, together with the large deflection angle, puts heavy power demands on the scanning circuits of the receiver.

For the line scan, last year's trend towards high-efficiency circuits with h.t. boost has now become almost universal practice. The basis of the circuit is now nearly always a heavy-duty pentode feeding

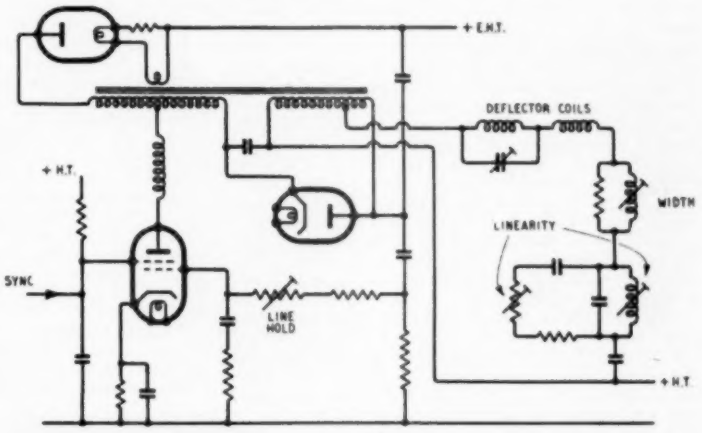

Fig. 2. Line-scan circuit of Baird P.1815 receiver.

Fig. 3. Fly-wheel sync circuit and saw-tooth generator of Pye FV2C.

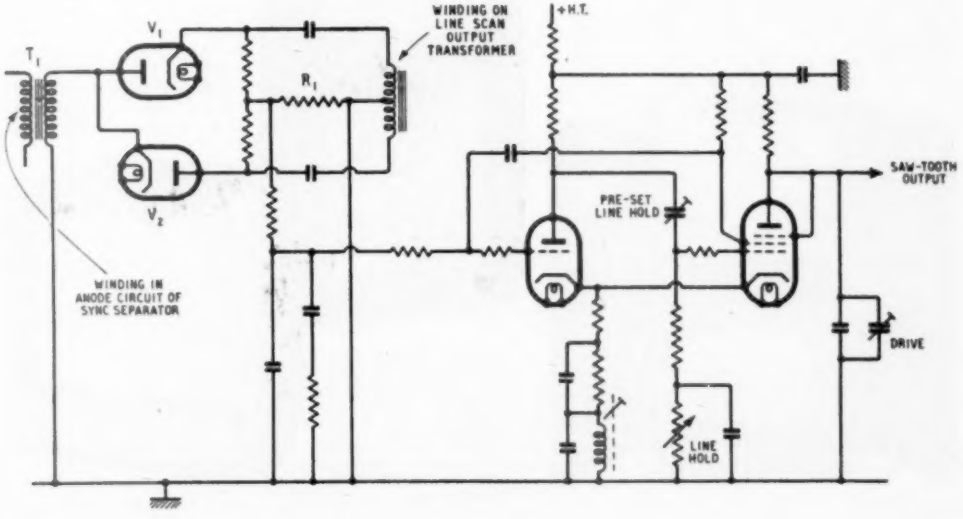

the deflector coils through an auto-transformer to which an efficiency diode is connected. The e.h.t. supply is derived from a valve rectifier fed from an an overwinding on the scan transformer and up to 14 kV is obtained. Sets with tubes above 12 inches usually have 12-14 kV, whereas those with the 12-in type operate at around 10 kV.

The details of the circuits vary somewhat and, in particular, the arrangement for obtaining linearity of scan. The driving methods vary considerably, however. Self-oscillators are used quite often. Here a favourite arrangement is to utilize the control and screen grids for the regenerative action, but Ferranti employ the control grid and anode, the grid being joined to a winding on the output transformer. Baird also adopt this type of circuit and Fig. 2 shows the arrangement in their P1815 receiver. The synchronizing pulses are fed to the screen grid.

One noticeable change is a big reduction in the number of sets using a blocking-oscillator as a saw-tooth voltage generator for the line scan. Instead, there is a tendency to use a pair of valves in a multivibrator circuit. One example of this is in the Pye FV2C and is shown in Fig. 3. Here V_3 and V_4 (a triode-pentode) form a multivibrator; the grids and anodes (screen-grid in the case of the pentode) are cross-connected by RC couplings and in addition there is a cathode coupling which includes a resonant circuit tuned to 8 kc/s. This is for the purpose of stabilizing the frequency of the circuit.

This receiver is unusual in having a form of fly-wheel synchronizing. Such circuits are standard practice in the U.S.A., where conditions are different. In this country direct pulse locking has been almost universal up to now. English Electric have used, and still use, a fly-wheel system, but only in the form of a plug-in unit for fringe areas.

In the Pye set fly-wheel sync is always in use. Referring to Fig. 3, the pulse waveform developed in the line-scan transformer is applied to a pair of series-connected diodes V_1 and V_2 so that they conduct during the fly-back. The sync pulses are applied to the same diodes effectively in opposite phase since, viewed from T_1, the diodes are the opposite way round. The circuit is a discriminator in which the phases of the sync pulses and the time-base pulses are compared and in which a steady voltage of magnitude and polarity depending on the phase difference is developed across R_1. This is applied through an RC circuit of long time constant to the grid of V_2, where it controls the multivibrator. The synchronizing thus depends on the average effect of a large number of sync pulses rather than upon any individual one, with the result that it is relatively immune to the effects of interference.

Ferguson also use fly-wheel sync, but of a somewhat different form. The saw-tooth is developed by a form of LC oscillator which is controlled by a reactance valve. The control voltage for this is produced by a duo-diode discriminator in which the sync pulses are compared with the time-base voltage.

For the frame scan two valves are usually employed and the deflector coils are nearly always fed through a transformer or auto-transformer. The latter is becoming increasingly common. There is, however, very little uniformity in frame time-base circuits; some sets use pentode output valves, others have a triode; some use the Blumlein linearity circuit, others have a simple corrector without feedback, and still others rely mainly on the curvature of the valve characteristic; some have a blocking oscillator, others a multivibrator. There is variety, too, in the synchronizing means; some still use an integrator, but probably most have a more elaborate arrangement with one or two diodes so arranged that the line pulses are completely removed from the wave.

There is little obvious development in this part of the equipment and from the performance point of view the results obtained in all the various ways seem much the same. The choice of a particular arrangement is often the result of economic factors which are far from obvious. Double-valves are now quite commonly employed and the design of the rest of the set may be such that, if the usual blocking oscillator were used for the frame saw-tooth generator, there would be a spare electrode assembly. It is then cheaper to utilize this as part of a multivibrator and to dispense with the blocking oscillator transformer.

The straight-sided mask is illustrated by the Ferguson 984T (above) and the curved-sided by the Regentone Big 15 S (right). The "double-D" picture format is used in the Peto-Scott TV168 (left).

(Left) *Philips 1427U with 14-in rectangular tube.*

(Right) *McMichael table model, showing the unusual position of the controls.*

(Below) *Stella S. 9212U with 12-in tube.*

G.E.C. table model with 16-in tube (BT 6145).

In modern equipment it is often impossible for anyone outside the organization concerned to say just why a particular arrangement is used.

The so-called transformerless set has now become standard and exists in two forms. The a.c./d.c. type is one and this is truly transformerless on its power-supply side. The valve and tube heaters are connected in series and the h.t. supply comes from a half-wave rectifier. Reservoir and smoothing capacitors are of the order of 50-100 μF and an h.t. line of about 180 V is secure. In some sets the smoothing choke can be short-circuited on a d.c. supply, where it is not needed and where its voltage drop is important.

The other category of set is for a.c. supplies only and does actually include a mains transformer. As a transformer it may supply only one or two valve heaters, the rest being series operated, or it may supply all the heaters. In both cases the primary is used as an auto-transformer so that the input to the h.t. rectifier (and the series chain of heaters, if any) can be kept at a reasonably high level on all mains voltages. The rectifier is still a half-wave type and, as in the a.c./d.c. set, the chassis is in direct connection with the supply mains. This requires that the chassis be well protected by the cabinet so that accidental contact with it cannot be made. Considerable attention is now paid to safety. Ventilation and other holes are so placed that no contact with any dangerous part can be made and the grub-screws in knobs are not overlooked.

Fire risks, too, are considered and fuses are used much more than they used to be. They are not always merely a pair in the mains leads, but in addition, subsidiary circuits sometimes have additional fuses. The h.t. supply may have its own fuses, for instance. In some cases, it happens that it is impossible to give a complete safeguard by a fuse; a breakdown in a capacitor, for instance, may result in a resistor being heavily overloaded, but the use of a protecting fuse or cut-out may be impracticable. The trend in such cases is so to place the resistor in the set that damage is confined to the resistor itself.

The permanent magnet retains its position for focusing, electromagnets being now decidedly rare. A recent development, which was shown by Mullard, is the use of Ferroxdur magnets. Two ring-type magnets are mounted with their fields in opposition and the focus field is adjusted by sliding one in relation to the other, so varying the gap between them. This Ferroxdur magnet has already found its way into receivers and is used by Ferguson.

Cathode-ray tubes nearly always have aluminized screens and/or ion traps, so that ion burn should now be a thing of the past. The metal tube is fairly common in the larger sizes and, since the metal cone is live to e.h.t., it requires careful insulation. The tube mounting often includes insulators several inches long and the front end is sometimes held in a moulded polythene ring.

The rectangular tube is also now quite widely used, especially in the table models, since it undoubtedly reduces the cabinet size for a given picture area. With such tubes the quoted size is for the diagonal and a 17-in diagonal rectangular tube gives the same size picture as a 17-in diameter round one.

In spite of the general increase of picture size, therefore, there are few external changes in the appearance of television sets and there is very little alteration in their dimensions. The chief styles are the table model and the console and, for both, the usual material for the cabinet is wood. Moulded-plastic cases are still to be found but appear less prominent than in previous years. The use of a transparent plastic as an implosion guard, however, is very common and is probably more often used now than glass. It is moulded to the contour of the tube face and it very often tinted.

The tinted screen or filter seems to be increasing

(1)

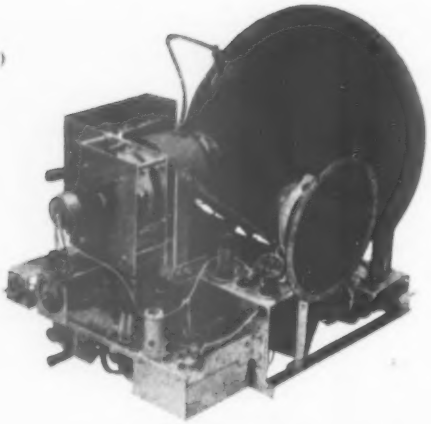

(2)

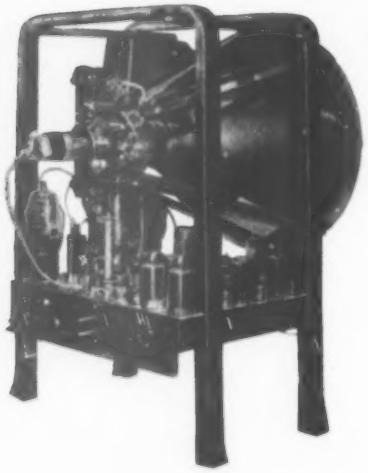

(3)

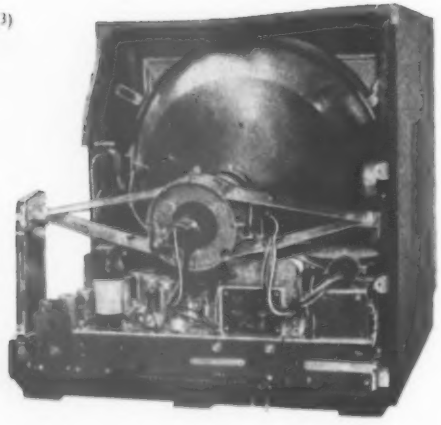

in popularity. There is no doubt that it improves picture contrast when there is a good deal of ambient lighting, but it undoubtedly requires an initially brighter picture. It would, therefore, appear to be detrimental to both tube life and to focus. In view of this it is rather surprising that there are few sets in which the filter is removable, so that the user need employ it only when it is really necessary. Murphy do so in the V204, but they are one of the few who do and the trend is certainly away from this. In some cases the filter is a part of the c.r. tube itself, the tube face itself being tinted, which precludes any possibility of its being removable. The present practice is to use rather lighter screens than hitherto. The majority are of a lightish grey colour, but the dark greys and deep purples, which were common when the filter was first introduced, are still used in some sets. There are still plenty of sets without such filters. About 45 per cent have clear viewing screens, 36 per cent light grey screens and 19 per cent dark grey or purple; 55 per cent have tinted screens.

The shape of the viewing mask is usually a "rectangle" with slightly curved sides and rounded corners. In some sets the sides are straight and only the corners are rounded. A few sets have the so-called double-D mask in which the top and bottom are straight but the two vertical sides are semi-circular. This was introduced about two years ago, but only six sets with it were noted this year.

The two important changes which are obvious are the general increase in picture size and the flatter tube faces. Only two models with 9-in tubes were at the exhibition this year! Nearly 60 per cent of the sets had 12-in tubes and 30 per cent had 14-in or 15-in. The remaining 10 per cent had tubes in the 16-in, and 17-in sizes and there was one, the H.M.V. model 1820, with a 21-in tube. Of sets sold during June 1952, the 9-in tube accounted for 7 per cent and the 12-in for 68 per cent.

The increase in size is so general that the 9-in screens now look tiny and the 12-in seem a bit small. The comparison that one makes at an exhibition is, of course, a very artificial one and under average domestic conditions the 12-in screen is about right. The larger screens are best suited to those having rather bigger than average rooms.

No-one can yet say what picture size will eventually become standard for direct viewing. Apart from technicalities, the economic factor is very important. One may guess that it will settle down at something like 12–15 inches.

The impression given by the receivers in operation at the exhibition is of a general improvement in performance. It is hard to judge the advances that have been made without direct comparison, but one got the impression of an appreciable improvement in definition and in tonal range. These are things which come about through improved design and mainly through closer attention to detail both in design and

(1) Chassis of Ferranti television receiver. The framework holding the focus magnet is of non-magnetic material.

(2) Ekco T161 chassis and tube mounted on special display stand. The way in which the focus magnet and deflector coils are carried on struts from the front mounting of the tube is clearly shown.

(3) Murphy V204 with part of the cabinet cut away to show the interior. The tube is clamped at the front and the focus and deflection assembly is carried by brackets attached to the side of the cabinet.

manufacture. They are not things which are evident on inspection of the apparatus or its circuitry.

This improvement in performance is also evident in the mechanical form of many receivers. There is much evidence that sets are now being well "engineered." The rigidity of the chassis and the tube mounting has been generally increased and the accessibility for maintenance has been improved. There is a noticeable tendency to keep the c.r tube separate from the chassis and to mount it, with the deflecting and focusing arrangements, in the cabinet as a separate unit.

Ekco, for instance, clamp the tube at its large end between a support ring and the implosion guard. Four light, but stiff, struts from this meet on a ring around the neck, which ring supports the deflector coils on one side and the focus magnet on the other. The whole forms a compact and rigid assembly which is mounted as a unit in the cabinet.

A good many firms showed projection television receivers. They are basically the same as those which have been available now for some years and employ the Mullard optical system and c.r. tube. Detail improvements, particularly in the e.h.t. supply and in viewing screens, have resulted in a noteworthy improvement in performance. Although most sets are of the back-projection type with everything inside the cabinet, there are quite a few front-projection sets. In these the viewing screen is hung on the wall and the picture projected on to it. For the best results viewing must take place in almost complete darkness, whereas the back-projection sets are but little affected by ambient lighting. Generally speaking, the back-projection sets are for domestic use, whereas the front-projection are more suitable for clubs and large assemblies where viewing can take place under more cinema-like conditions. The pictures, too, are bigger with a diagonal up to 5 ft.

Projection receivers are, of course, no different in their basic form from direct-viewing types. About the only differences are in the video stage, where rather greater output is needed, in the e.h.t. circuits and in the need for simple tube protection circuits. The 25-kV e.h.t. supply is invariably obtained from a special unit operating on the ringing-choke principle.

Whatever set is used it needs some form of aerial and feeder. Opinions are still divided about the relative merits of twin-wire and coaxial feeder and both are still used.

Occupiers of rented premises sometimes find it a little inconvenient to bring a television feeder through the walls or window frames of the building. As a solution Wolsey have evolved a window aerial coupler consisting of two small cylindrical-shaped units attached to opposite sides of a window pane by suction cups. The coaxial feeder is connected to one and the lead from the receiver to the other. Each unit contains a tuned coil and the two are coupled together through the glass of the window pane. They thus form an r.f. transformer giving a signal transfer by inductive coupling. There is no direct connection between the two, so that the sheath of the outdoor feeder can be earthed to reduce any risks from lightning.

Television aerials themselves are in the main unchanged. There are simplified types for areas of very high field strength, but development is largely in fringe-area types. Signal-to-noise ratio is here a major factor and various means are being adopted to improve it. Belling and Lee have produced a very

Pye FV2C with 16-in tube, dark screen, and flywheel sync circuit.

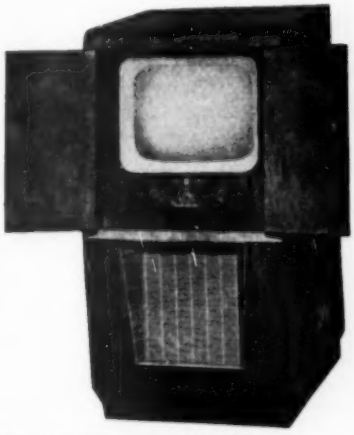

H.M.V. 12-in tube console. Model 1816.

Ferranti T1625 projection model with 15-in by 11½-in picture

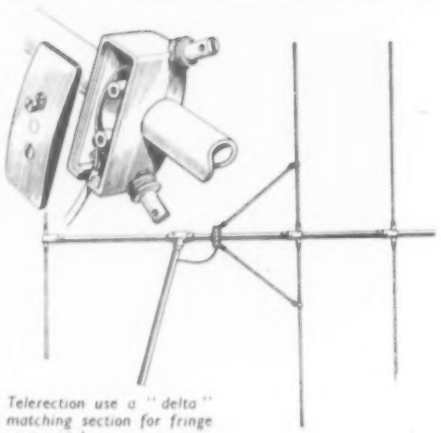

Telerection use a "delta" matching section for fringe area aerials.



Aerialite Dublex television aerial uses crossed folded dipoles.

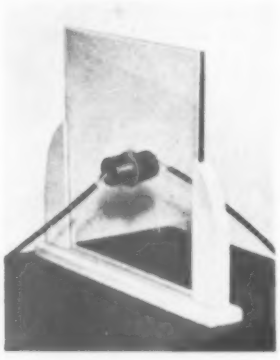

Left: Walsey Window Aerial Coupler is fixed to the window pane by suction cups, no holes are required.

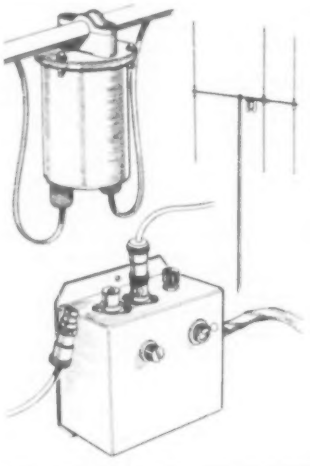

Right: Belling-Lee head amplifier and power unit. Inset: Mounting of amplifier on aerial.

compact pre-amplifier, appropriately named a head amplifier, since it is mounted at the top of the mast supporting the aerial array. A single-stage push-pull earthed-grid amplifier, giving a gain of 8 db, is employed and power for the amplifier is fed along the coaxial feeder in the form of 33 volts a.c. so that no additional cables are required. In the head amplifier is a small rectifier and a.c./d.c. technique is adopted.

Another way by which a better signal is achieved, again by improving the signal-noise ratio, is by paying particular attention to the matching of feeder to aerial. Telerection have adopted the "delta" match in place of a "T" match employed hitherto as it is said that more satisfactory matching is possible and consequently the overall gain of the system is improved.

Development work on aerials for normal service area use has not stood still and an entirely new aerial has been introduced by Aerialite. This is known as the "Dublex" and consists of a pair of folded dipoles arranged in "X" formation. In this model the dipoles are interconnected and both joined to the feeder for anti-phase operation. A forward gain of 6 db with a back-to-front ratio of 25 db are claimed for it.

Aerial makers are supporting their claims by means of polar diagrams showing the measured responses of the various aerial systems and it is interesting to note that in the case of the Aerialite "Dublex" the response to both sound and vision signals is sensibly the same. It is clear, therefore, that the type of construction adopted provides a satisfactorily wideband system.

SOUND RECEIVERS: HOME AND EXPORT

NUMERICALLY the table model superheterodyne is still the most important sound receiver, and of the hundred-odd models shown, fully 25 per cent are new this year. Many of these have been produced to an economical specification which omits non-essentials without sacrificing the quality of vital components, and are priced between £20 and £25, including tax. Typical of this trend are the Bush AC31 and K.B. Type H30.

Another marked trend is towards the use of shallow cabinets with a large frontal area to give the best

Set Makers!
EXPORT is important to you...
fit BRIMAR
—the complete range of British made American Type Valves for Export Receivers

- COMPETITIVE PRICES
- AVAILABLE FROM STOCK
- SPARES IN ALL PARTS OF THE WORLD
- TECHNICAL AIDS — The BRIMAR Manual and BRIMAR Application Reports give valuable technical information, measured performance data in typical circuits and comprehensive curves for the convenience of the circuit designer.

AC RECEIVERS
6BE6 6BA6 6AT6
6AQ5 6X4
(6X4 permits operation from common heater winding.)

AC/DC RECEIVERS
12BE6 12BA6 12AT6
35L6GT 35W4
For operation on 110v-250v supplies.

VIBRATOR & CAR RADIO RECEIVERS
Type 6AK6 economy output Valve with heater consumption of 0.15 amp. at 6.3v may be used in place of type 6AQ5.

BATTERY RECEIVERS
1S5 or 1U5 3S4 or 3V4
1R5 1T4
Type 1U5 features improved construction and low microphony compared with type 1S5.
Other American type BRIMAR valves include a full range of Octal and Loctal based types.

GEAR YOUR EXPORT DRIVE TO BRITISH BRIMAR VALVES
Noted for reliability and used in Telecommunication and Radio Equipment for governments and industries throughout the world.

BRIMAR VALVES
MADE IN ENGLAND

Standard Telephones and Cables Limited Radio Receiver Valve Division,
FOOTSCRAY, SIDCUP, KENT. Footscray 3333.

"The incomparable GP 20 crystal pick-up is generally available again..."

THAT'S GOOD TO HEAR!

THE GP-20
HAS TWO INTERCHANGEABLE HEADS:

GP-19 HEAD: Output ½ v. at 1,000 cps. 5-20 times greater than comparable magnetic types. Range 30-10,000 cps. Low needle pressure—14 grms.—virtually eliminates record wear.

GP-19 LP HEAD: Output ½ v. at 10,000 cps. Response is flat from 30 cps. to 3,000 cps. with a rising characteristic above this frequency. Needle pressure 7 grms.

BOTH HEADS: Automatic bass boost. Can be fitted to most domestic radios without additional equalisers. Needle talk and motor rumble negligible. Unbreakable and non-hygroscopic crystal element. Permanent sapphire stylus eliminates needle change.

MODEL NUMBERS & PRICES

GP-20	*Complete Pick-up with Standard Head*	**£2 10 -** (plus 21/5 P.T.)
GP-20 LP	*Complete Pick-up with Long-playing Head*	**£2 10 -** (plus 21/5 P.T.)
GP-19	*Standard Head as fitted to GP-20*	**£1/10/-** (plus 13/4 P.T.)
GP-19 LP	*Long-playing Head as fitted to GP-20 LP*	**£1 10 -** (plus 13/4 P.T.)

always well ahead

COSMOCORD LIMITED ENFIELD, MIDDX.

possible quality of reproduction at the lower frequencies. New receivers in the category include the Ferranti 225, the G.E.C. type BC583, Philips 411A, Pilot 75, Pye PE60, the Sobell 553 and the Stella type ST151A.

In the Ferranti 225 the internal frame aerials are switched out when the set is used with an outdoor aerial. Many sets use either frame or plate aerials which take the place of the outdoor aerial when circumstances permit.

There are signs that manufacturers are giving more attention to selectivity, which is assuming increasing importance, particularly in the south of England, on account of the overpowering strength of some medium-wave Continental stations after dark. In the new Murphy A182 the i.f. response has been adjusted to give a steep-sided characteristic, with reasonable bandwidth and a sharp cut-off.

Push-button selection of a limited number of stations (usually three) is a feature of several of the table models. In the new G.E.C. BC5839, calibrated slides at the back of the set are provided for setting up the selected stations.

Table model receivers for export follow the broad lines of home models so far as their basic circuits are concerned, but employ components with extended temperature rating and are treated to resist corrosion and be less palatable to insects. Extra short-wave ranges, usually bandspread, are provided and the long-wave range is omitted. Calibration if often in frequency rather than in wavelength and cabinet styles are more colourful than is deemed "safe" for the home market. Many sets are available for operation from a 6-V accumulator through a vibrator, or from "all-dry" batteries as well as from mains. The new Masteradio D133, for example, is available in alternative versions for all three of these methods of power supply. The Pye P60, which, incidentally, is now available for the home market, has an export version for 6-V operation and has a liberal specification with no fewer than 11 wave ranges. Another outstanding export receiver, in this case for "all-dry" battery operation, is the new Vidor "Bandspread 8" (Type CN423). The frequency changer is a heptode working in conjunction with a separate high-stability oscillator. Feedback is applied over the output stage.

Designed for operation from a.c. mains or batteries, the Pye P65MBQ has an 8in loudspeaker.

Alba "7-0-7" portable radio-gramophone for battery as well as mains operation.

The demand for full-sized table models working from dry batteries only is by no means confined to overseas buyers, and a new high-quality receiver (Model 258B) made by Ferguson has a 1-watt q.p.p. output stage

Where low first cost is a consideration and running expenses must be kept to a minimum, the battery set can again supply the answer, as has been demonstrated by Ever Ready in their two-valve Type "H" receiver. This costs only £7 13s 1d (complete with aerial and earth wires, which are considered essential) and gives 500 hours service from a B103 combined l.t. and h.t. battery.

In households where television is the main interest, the sound receiver is often a portable maid-of-all-work which can be used on mains at home and on batteries out of doors. Between 30 and 40 models are available in manufacturers' current lists and roughly a quarter of these are new at the Show. The new Murphy BU183 is compact and incorporates an interesting battery economy circuit which is continuously in operation. In series with the bias resistor, which is of a higher value than normal, is a small metal rectifier to which a portion of the a.f. output is applied from the anode of the last valve. The rectified voltage is smoothed and opposed to the standing bias, so that the net bias is

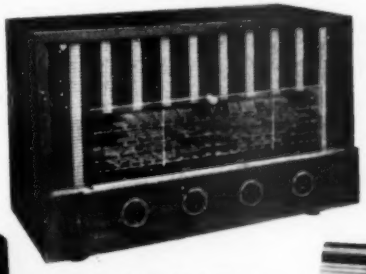

Vidor "Bandspread 8" (Type CN423) "all-dry" export receiver.

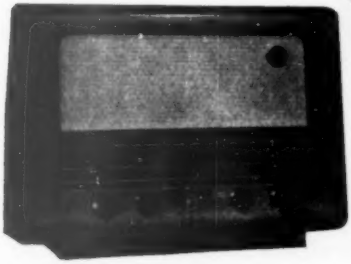

(Left) Philips Model 411A with shallow cabinet.

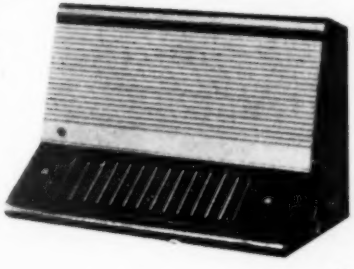

(Right) Pye Model PE60, now available for home as well as export.

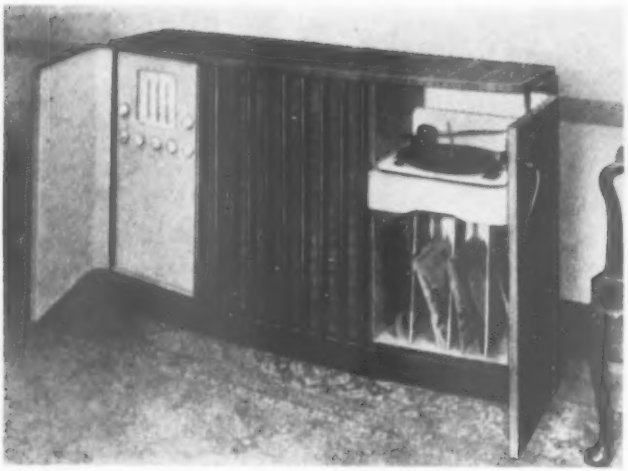

Ever Ready two-valve "all-dry" battery receiver (Type "H") and (left) A new high-quality radio-gramophone, the Ferguson "500."

reduced towards optimum as the power output increases. The Pye P65MBQ, which is designed for battery or a.c. mains operation, is notable for the fact that an 8-in loudspeaker is used in a plastic cabinet which does not give the impression of undue size. G.E.C., in their new BC4444 mains/battery portable, favour the attaché case form in which the battery switch is interlocked with the lid; the weight is 8 lb. Another new portable of this type is the Pamphonic 903 which is for battery operation only. In the latest version of the Ferranti 825 it is interesting to note that aerial and earth terminals have been provided specifically to meet the needs of those who wish to work the set inside a metal-panelled caravan! A mains-battery portable which invites comparison with communication-type receivers is the Champion 781, for which a sensitivity of better than 6μV is claimed. This 7-valve receiver, designed primarily for export, has r.f. amplification on all wavebands and uses a telescopic rod aerial on short waves. When operated from mains the back automatically opens to provide adequate ventilation. A switched battery economy circuit is provided and there is also a switched dial light.

Three portable radio-gramophones were shown; the Pye P32QTG (introduced last year), the Decca "Portrola" with 3-speed turntable, and the Alba "7-0-7." The latter is designed for operation from batteries as well as from a.c. or d.c. mains and has a Garrard spring motor. The motor board is hinged and a half-turn on two screw catches gives easy access to the batteries and the 4-valve radio chassis. An export version is available with medium and one short-wave band in place of the standard medium and long waves.

The sustained public interest in high-quality reproduction is reflected in the large number of new console radio-gramophones which have made their début at the Show. Of the 70-odd models shown nearly 20 were new designs. All the new H.M.V. and Marconiphone models make use of a new three-speed record changer with interchangeable centre spindle to play 45-r.p.m. 7-in as well as 78- and 33⅓-r.p.m. 10-in and 12-in records. In the most expensive H.M.V. radio-gram (Model

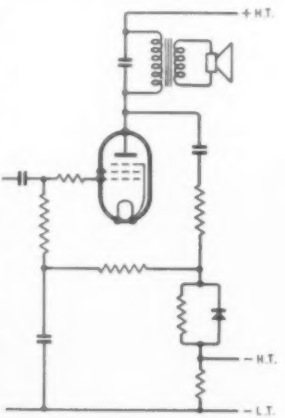

Champion 781 mains battery export portable with r.f. amplification on all wavebands.

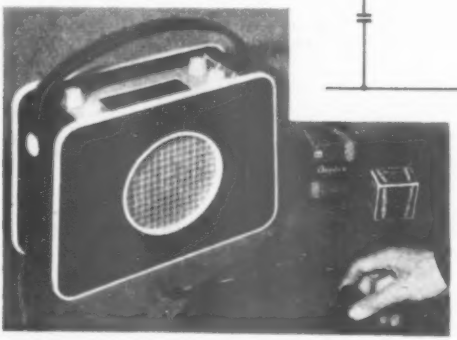

An automatic battery economy circuit is a feature of the Murphy BU183 mains/battery portable.

1612A) a total of 15 valves is used and two special 13½-in elliptical loudspeakers are used to give effective distribution of the acoustic output.

Two important alterations have been made in the acoustic specification of the Dynatron radio-gramophone; the bass chamber has been modified to give forward radiation from the vent, and the extreme top can be optionally extended when circumstances permit, by switching in a special treble loudspeaker unit. The "Ether Conqueror" radio chassis (which can be purchased separately for £136 6s) has an overall gain which has proved excessive in some applications, and a pre-set i.f. gain control is now fitted as standard. This is not the usual bias control, but is a feedback arrangement which avoids disturbance of the response characteristic. Another new refinement is a bi-metal-controlled, temperature-compensating capacitor in the oscillator circuit. Ferguson can justly claim to have entered the front rank of radio-gramophone manufacturers with their new "500." This employs the cathode-coupled output stage used in the "300" model described last year, but with larger valves (EL37) and the total harmonic distortion is now 0.1 per cent at 6 watts, 0.35 per cent at 10 watts and 1 per cent at 14 watts. A combination of 12-in and 5-in loudspeakers handles the output and the cross-over is at 1,000 c/s. An extended bass response is ensured, without coloration, by a large frontal area and a two-section acoustic chamber. The cross-over network is loaded to equalize variations of the loudspeaker impedances with frequency and the circuit is claimed to minimize the effects of phase shift commonly experienced with conventional cross-over circuits. Steep- and gradual-cut filters are associated with the tone control to give the optimum performance on records which cannot be played with the full frequency range. The pickup is a special crystal with a flat response up to at least 12 kc/s.

Only two new table-model radio-gramophones made their appearance, the Sobell 513TG and the Invicta 58. The latter must be unique in having a trawler band (75-200 metres) in addition to short, medium and long-wave ranges. An unusual loudspeaker arrangement was noted in the Sobell 613AG console radio-gramophone which has twin 8-in units mounted in the corners at the front with the record storage compartment in the centre.

Most firms include in their catalogue which might be termed "production high-quality" console radio-gramophones at prices in the region of £60-£70. These give a standard of performance which is in keeping with recent advances in recording techniques and will appeal to those whose listening experience has reached the stage where the average table model receiver with record-player has apparent limitations.

VALVES AND CATHODE RAY TUBES

IT is not exactly surprising to find that practically all the new receiving valves being produced nowadays are either designed specifically for television or with a very wide-open eye to their possible use in such circuits. Indeed, with manufacturers describing them glibly as "video pentodes," "line-scan output valves," "booster diodes," "e.h.t. rectifiers" and so forth, one almost tends to forget that they are, when all's said and done, just ordinary valves. But apart from the question of terminology there is no doubt that these valves all reflect in their electrical and physical charac-

Right: Ediswan 17-in rectangular cathode ray tube, type CRM171.



Below: Electrode structure of Mullard cathode ray tube (large-size demonstration model).

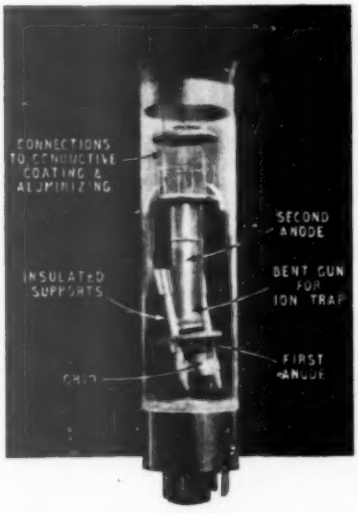

Above: Size comparison between Brimar 6V6 beam tetrode and its modern miniature equivalent the 6BW6 shown on the right.

Left: Cossor ICP1 miniature cathode ray tube for waveform monitoring.

teristics the trend of design of the modern television receiver.

At the moment the prevailing trends are towards a.c./d.c. circuits, to give receivers that are small, light and cheap, and wide-angle cathode ray tubes to satisfy the continual demand for bigger pictures. Consequently the newer valves are all miniature types, with 0.3-amp heaters designed for series running, with characteristics that make the most of the necessarily low h.t. supply, and with outputs capable of driving the wide-angle c.r. tubes. Most of them are on the B9A base rather than the B7G. This is partly because the extra pins are needed for multi-electrode and double valves and partly because the slightly larger envelope allows of greater power ratings—it is the glass alone which sets a limit to the dissipation.

One new valve at the Show which typified this trend was the Osram N339 power pentode, intended mainly for use as a line time-base output valve in a.c./d.c. television receivers. It is on the B9A base and has a 0.3-amp 20-volt heater, and in spite of its small size (2¼in high and ⅝in diameter) it will deliver a peak anode current of about 300 mA at an anode voltage of only 85. The mutual conductance is 9 mA/V and the maximum power dissipation just under 15 watts. This valve, like many of its contemporaries, has been designed with the "knee" of its anode characteristic at a very low voltage, so that a large anode current swing can be obtained with a low anode voltage—and also with a small power dissipation.

In the realm of the r.f. amplifying valve, however, the impact of modern television technique has not produced any startling developments, for there were plenty of types in existence already that satisfied all the requirements of wide-band amplification. Even the necessity of operating these valves at low anode voltages in a.c./d.c. sets does not have any really detrimental effect on their characteristics. The general trend, then, is quite a normal one towards higher mutual conductance, higher input impedance, lower inter-electrode capacitances and lower noise levels. A typical example at the Show was the new Brimar 6BW7 pentode, suitable for r.f., i.f. and video amplification. Again it is a miniature all-glass valve on the B9A base and has a 6.3-V, 0.3-A heater. With an anode voltage of 180 volts the mutual conductance is 9 mA/V while the input impedance at 50 Mc/s is 14kΩ. The input capacitance is 10 pF and the output capacitance 3.5 pF.

Considering the miniature valve generally, there is evidence of some very great improvements in all-round performance and reliability in the last year or so. No longer is it the precocious problem-child of the industry, and no longer do cautious engineers regard it with suspicion. Indeed, a study of some of the latest types reveals that they are now considerably better than the old normal-sized valves from which they were originally derived. Undoubtedly, the reason for this has been the large demands of the television set-making industry, which have forced manufacturers to pay special attention to the design and mass-production of these valves—and made such attention well worth while.

Developments in television cathode ray tubes are still largely controlled by the simple human failings of Mrs. X of Acacia Grove, who, when she goes to buy a television set, is determined to have a bigger picture than Mrs. Y next door. The thing of the moment seems to be the rectangular tube with a 17-in diagonal, and most of the well-known manufacturers had their own versions on show at the Exhibition,

Garrard 3-speed gramophone unit (Model T) with turntable removed.

Goodmans Type B 600 vibration generator delivering an r.m.s. force of 250 lb.

H.M.V. 3-speed record changer (Model 2125) with special centre post for 7-in, 45-r.p.m. discs.

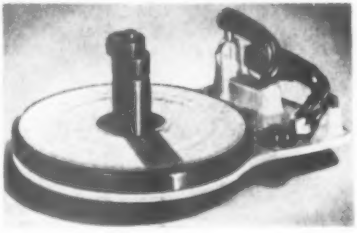

although not all of them were actually in production. These were all wide-angle tubes with anode voltages in the region of 15 kV.

The next size down is the 16-in tube with an anode voltage of about 12 kV, and at the Show it was represented by one new all-glass type and two steel-cone types. In spite of the metal shortage the steel cathode-ray tube still seems to be keeping its foot in the door, so to speak, and undoubtedly it deserves recognition for the very attractive feature of its light weight. The 16-in type, for example, weighs only 14 lb as against the 20 lb of its all-glass counterpart. But the steel tube is more expensive at the moment, and only when Mrs. X drives the screen diameters up to about 20in and all-glass tubes become difficult to make, will it begin to show an advantage in price. (The solitary 21-in tube at the Show was a steel-cone type.)

Coming down to the more familiar 15-in tube, one of the latest models at the Show was the Ediswan CRM152B. This was interesting by virtue of the fact that the glass face of the screen was tinted grey to give the same effect as an anti-halation filter placed in front of the tube. (The idea may have sprung from a recent suggestion that grey-tinted phosphors might be used.) But, of course, although this scheme undoubtedly improves the picture in the same way as a separate filter, it still suffers from the inherent disadvantage of reducing the light output of the screen.

The smallest of the new wide-angle tubes on which

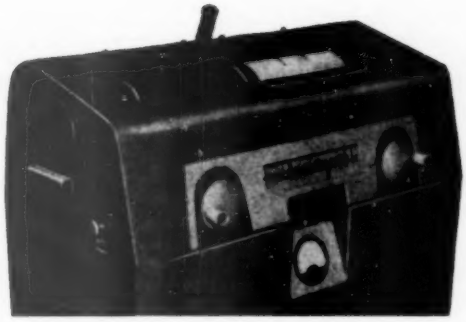

Above : Roneo electronic stencil cutter showing the cylinders carrying the stencil (left) and the original (right).

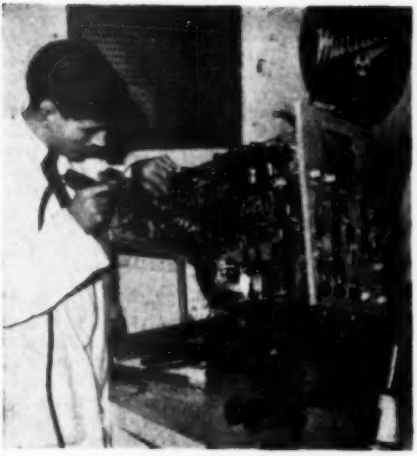

Demonstration of soldering on a Pye television camera at the Multicore stand.

Above : Collaro "Orthodynamic" magnetic pickup with twin osmium-alloy stylus tips.

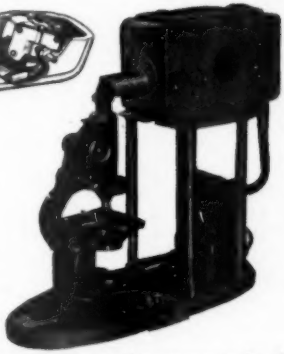

Right : Pye miniature television camera used as a 625-line television microscope.



Right : Fully automatic push-button controls are a feature of the new Truvox tape deck.

manufacturers are now concentrating seems to be the rectangular type with a 14-in diagonal. It gives an effective picture area nearly 40 per cent greater than that of a 12-in circular tube, and the cubic space it occupies in the cabinet is about 40 per cent less. The latest versions at the Show were the Ferranti TR14, with an octal base and 4-V heater, and the Mullard MW36-22, with a B12A base and 6.3-V heater. Both are operated with about 10 kV on the anode and require a modulating signal of the order of 30 V. The TR14 carries on the tradition of all previous Ferranti tubes of doing without an ion trap, which, the makers say, is not necessary if the tube is properly de-gassed to prevent the formation of ions in the first place. Nevertheless, the screen has an aluminized backing which would serve as a protection against ion burns if by some mischance the tube were not properly de-gassed.

With all the attention that is being focused on the cathode ray tube as a means of displaying television pictures, one almost tends to forget that it is also a useful device for observing waveforms. However, oscilloscope tubes were quite well represented at the Show. Two of the latest were the 1608CCHE double-gun tube made by G.E.C. and the 1CP1 miniature tube by Cossor. The last-mentioned is remarkable for its small size (1-in diameter screen) and for the fact that the focusing of the beam is automatic and only one anode potential is required (about 500-800 volts).

OTHER EXHIBITS

ALTHOUGH the Radio Show this year gave rather less than an adequate picture of the scope of British activities in electro-acoustics, such exhibits as were to be seen—and heard—were of more than usual interest. G.E.C. gave one of the best demonstrations of two-channel stereophonic, or, as they prefer to call it, three-dimensional sound reproduction so far heard. Intended primarily to demonstrate G.E.C. resources and skill in high-quality reproduction, the equipment comprised G.E.C. "Quality" 30-W amplifiers (using KT66 valves) and moving-coil loudspeakers of radically new design developed by the Research Laboratories, Wembley. The cone diaphragms are of metal terminated by a corrugated surround of plastic damping material and are pierced and pressed up to form louvres at strategic points on the diaphragm. There is also what appears to be a form of high-note diffuser in the apex of the cone. It is claimed that the metal diaphragm causes less intermodulation than paper types and that the difficulty of obtaining a smooth response at high frequencies has been solved. The demonstrations certainly support these claims. Each loudspeaker consists of three units mounted in a vented cabinet, which seems to be remarkably free from coloration in the bass.

Another well-attended demonstration was that of Goodmans Industries who showed the relative merits

of all their principal units and baffles. Two new high-quality 8-in cone loudspeakers have been introduced by this firm. They are the Axiom 101 and 102, the former with 13,500 gauss and the latter with 16,000 gauss flux density in the permanent magnet gap. A convex centre cone radiates the higher frequencies, and the frequency range quoted is 50-10,000 c/s. Goodmans also specialize in moving-coil generators for vibration tests and in addition to the small instruments for valve electrode testing, and intermediate types for light engineering components, they have now developed a Model 8/600 capable of an r.m.s force equivalent to 250lb for exciting aircraft frames and similar structures. Two impedances, suitable for excitation from an alternator at low frequencies, and a valve amplifier at higher frequencies, may be selected by a changeover switch. The field is provided by a permament magnet and the moving coil is air-cooled by a built-in blower. A pickup unit mounted at the "delivery" end of the driving spindle is provided for monitoring the waveform of the motion.

V.H.F. portable radio-telephone made by G.E.C.



Right: Waveforms television c.r. tube tester and reactivator.



Above: Belling-Lee overload cut-out, 250 mA type.

Above: Internal view of Valradio lightweight vibrator power pack used in the Comet jet airliner.

Left: Cossor miniature portable oscilloscope with tube protecting cap.

Among new record-playing mechanisms a compact new 3-speed turntable unit (Model T) by Garrard was notable for the single-ball tone arm bearing giving free lateral movement and for the independent stylus pressure adjustment which supplements the automatic change of pressure as the pickup head is rotated for standard or long-playing records. The new H.M.V. 2125 plays up to eight 10-in or 12-in 78-r.p.m. records mixed, up to ten 10-in or 12-in mixed 33⅓-r.p.m. or 45 single records. Up to eight 7-in 45-r.p.m. discs can be played by using a special centre post. The wide range of Collaro players and record changers remains substantially as before, but it is interesting to note that the "Orthodynamic" (magnetic) lightweight pickup for 78- and 33⅓-r.p.m. records is now fitted with twin styli of hard osmium alloy which is immune from fracture and is stated to have self-polishing properties when used on modern record materials.

A three-motor drive is a feature of the new Truvox tape deck, shown by the associated Rola-Celestion Company. The tape loading does not involve threading, and controls for record, playback and fast forward or rewind are by push button. An additional feature is a separate push-button "instantaneous" brake. The half-track recording head is wound for a high-impedance signal source with a low-impedance tap for bias and the erase head has a low-impedance winding.

Undoubtedly the most original exhibit on the R.I.C. electronics stand was a machine, made by Roneo, Ltd., by means of which it is possible to reproduce pictorial matter on duplicating stencils. This means that the well-known Roneo duplicating process is no longer restricted to the sort of thing that can be cut directly into the stencil by a typewriter or stylus, but can be used for reproducing photographs, newspaper and magazine pictures, typeset matter, pencil and water-colour drawings—in fact almost any kind of original.

The general principle of the machine is reminiscent of phototelegraphy. A pattern of tiny holes is cut in the stencil by an electric spark which is controlled by a photocell scanning the variations of light and shade of the original. The intensity of the spark, and consequently the size of the hole which allows the ink through, varies in proportion to the darkness of the original. As in phototelegraphy, the original is fixed to a revolving horizontal cylinder and is scanned in a spiral by the photocell tracking slowly across from one side to the other. Rotating on another cylinder on the same shaft is the stencil, with a tungsten wire electrode moving across it in synchronism with the photocell—the spark jumps from this electrode through the stencil (made of a carbon material) to the metal surface of the cylinder underneath. The fluctuating output of the photocell is used to amplitude-modulate a 20-kc/s carrier frequency, which is amplified and applied to the spark gap from a 30-watt push-pull output stage. Thus there is a spark at each half-cycle peak of the carrier, and its intensity depends on the peak level produced by the modulation from the photocell. Scanning is done at 500 lines to the inch, which is a good deal finer than in phototelegraphy, so it is possible to reproduce the most subtle variations of light and shade by this process.

In the way of soldering materials, there were some useful new products to be seen this year on the Multi-

THE "BELLING-LEE" PAGE

Providing technical information, service and advice in relation to our products and the suppression of electrical interference

The weight of a "Multirod"

A few days ago we had occasion to refer to the weight of a "Multirod" aerial. The mast, elements and crossarm, i.e. everything except lashing and brackets weighed 26lbs., that is 1¼lbs. less than the weight

of an average chimney pot which we had by us. All "Belling-Lee" aerials, in spite of their light weight take terrific punishment without coming to harm.

Wenvoe and the West

Another transmitter is on the air. Wenvoe started up on low power during the forenoon of July 15th. Already we know of "Doorods" installed in situations where the sensitivity of the receiver has had to be increased. When Wenvoe goes on full power some pictures will be too white. This will necessitate the readjustment of many receivers. Someone is going to be very busy.

We hear from Bristol and Bath that there are "ghosts". We also hear of surprisingly good results in both places. We had a look at some of the "ghosts" of Bristol. This town is like the Phœnix, rising out of its own ashes. It is in the process of rebuilding. Giant cranes tower over steel girders. An experienced man can pick out most of the causes but he can no more stop a steel structure from reflecting a television signal than Canute could keep back the sea. There are certainly reflections from some of the sharp hills in the town, but from first impressions these are not serious. It is interesting to note that Wenvoe is almost due west of Bristol. The strength of signal varies tremendously. A measured 10 db. becomes 45 db on a site one mile away.

Good News for Scottish Viewers

Many Scottish landlords are determined to make things difficult for prospective owners of television receivers. On their side let it be admitted that they must protect their property or that of their principals. These high tenement properties do present a problem. Many English manufacturers just do not appreciate a situation where several families may actually own their flat in a block of flats, without any rights of access to the common roof.



Many of these Scottish roofs are steep and high and very old, and apparently slight damage may well have far reaching results. It is for these reasons that our designers were sent up to Scotland to investigate the problem. The result is the "H" type aerial illustrated here. There is a support arm "B" which lies on the window-sill secured at A. It is held from movement by stays F & H. This support takes the rotatable crossarm which holds the elements. The whole can be erected by a handyman without the aid of steps, and without leaving the room.

A new Crossarm and Casting

This is a very real advance. The two reflector elements are securely clamped *and locked* in the casting, which at the same time is secured to the crossarm by an internally expanding device. The whole operation being carried out by tightening one ¼" high tensile steel bolt. This ingenious time saving device is covered by U.K. Patent No. 519883. In appearance, when erected, the whole assembly presents a tidy symmetrical job, and one that will be welcomed by all who may be interested in aerial erection. The design takes special care to minimise vibration fatigue of the reflector elements.

Reprints of "Wireless World" pages

Readers are constantly writing for reprints of articles which have appeared in these pages. Recently we have gone over all the many pages, cut out repetition and have reprinted them in the form of an eight page newspaper entitled "Belling-Lee" Bulletin. Seeing it altogether, suitably illustrated, we think it makes very interesting and informative reading.

"Polar Diagram"

The writer does not know when this term first became associated with the directional response of an aerial. Certainly the term polar diagram indicates something in relation to either the north or south and is just not applicable. In future we intend to refer to the "Directional Response" of an aerial (in the horizontal plane).

Suppression of Mains Borne Interference

In cases where interference is partly or entirely mains borne, the fitting of "Belling-Lee" mains filter at the affected receiver is a good method of curing this annoyance. Our set lead suppressor L.300/3 has



a current carrying capacity of 1 amp, is effective between 10-2000 metres, and can be used with most domestic receivers. This filter is suitable at broadcast frequencies only.

Written 30th August, 1952

BELLING & LEE LTD
CAMBRIDGE ARTERIAL RD. ENFIELD, MIDDX. ENGLAND

Will those in coastal towns, fishing ports, yachting centres etc., bear in mind that "Belling-Lee" are specialising in suppression on board ship.
We have done such work on ships of all sizes from the "Queen" class to travelers, driftors and yachts.

40 MARCONI RADIO BEACONS

will ring the British Isles

From the Channel Islands to the Shetlands, from the Thames to the West Coast of Ireland . . . 40 lighthouses and lightships around the coasts of Great Britain and Ireland are to be equipped with Marconi Marine Beacons by the Lighthouse Authorities. These M.F. Beacons will be fully duplicated with changeover switching, indicating and alarm facilities; in addition specially selected stations in the vicinity of the main ports will provide 'request' transmissions.

MARCONI marine beacons

MARCONI'S WIRELESS TELEGRAPH COMPANY LTD · CHELMSFORD · ESSEX

core stand. Notable amongst them was a range of exceptionally fine wire solders extending from 24 s.w.g. down as far as 34 s.w.g. All of them, even the 34-gauge, contain three separate cores of flux and the proportion of flux to solder is the same as in the larger-sized wires. Then there was a soldering wire composed of tin, lead and cadmium with the low melting point of 145° C, and another one, made of pure tin, with the high melting point of 232° C. Suitable for soldering flat pieces of metal together was a "liquid" solder consisting of powdered alloy and flux. The idea is to paint it on and then heat the work until the solder flows. Also shown on this stand were examples of joints made with coloured-core solder (which Multicore claim to have introduced many years ago); slugs, pellets and pre-forms for mass-production soldering; and various fluxes dissolved in alchohol.

Worthy of mention were the pin-protectors for miniature valves shown by Brimar. The valve pins wedge into a circular groove cut in a small pellet of flexible plastic material.

The idea of revivifying a valve that has lost its emission by over-running, or "cooking," the filament is not new but so far as we know it has not hitherto been applied to television tubes. The high cost of a replacement makes any scheme that might give the tube a new lease of life worth while trying, especially as nothing is lost if the tube fails to respond to treatment.

A piece of apparatus for this purpose has been developed by Waveforms. It is a little more than a reactivator as it contains a sensitive micro-ammeter which records the actual emission of the tube and shows what progress is being made to restore the emission to a usable value; about 80 to 100 μA is said to give acceptable picture brightness. Tests can also be made of heater-cathode insulation, of heater continuity and for short-circuits on any electrode. Described as the "C.R. Tube Tester-Reactivator" it is intended mainly for dealers' use. The tube can be tested without taking it out of the set.

A genuinely portable miniature oscilloscope has been introduced by Cossor for general-purpose use. Known as the Model 1039, it contains a 2½-in c.r. tube, a single stage work amplifier switchable for high gain at narrow bandwidth or low gain at wide bandwidth (3.5 Mc/s), a time base covering 10 c/s to 50 kc/s and provision for an external time base if required. The total weight is 9¼ lb and the size 5½ × 4½ × 11½ in. It is a.c. operated and entirely self-contained.

A new television waveform generator has made its appearance, the makers are Telequipment and it provides both sound and vision signals. The test pattern is the usual series of vertical and horizontal bars but accompanied by gradations in intensity of the horizontal bars. A variety of waveforms can be produced and the receiver checked for line and frame hold, interlacing, possibility of ringing, linearity and most of the tests needed on a television receiver in the absence of a signal. Models are available for British, Continental and American systems.

Communications equipment was almost non-existent this year but G.E.C. had a few new items. Some minor modifications have been made to their communications receiver and in its new form, which incidentally is not changed outwardly, it is known as the Model BRT400D. They have also introduced a small pack-type radio telephone for operation as a walkie-talkie in the 70- to 100-Mc/s band. It gives an output of 0.25 W into a telescopic integral vertical aerial, uses frequency modulation and is operated from a 6-volt accumulator using a vibrator for h.t. supply.

A new device for protecting equipment subject to surges has been evolved by Belling and Lee. It is an overload cut-out and operates on the principle that heat generated in a resistance expands a bi-metal hairpin strip causing it to open and release a spring-tensioned contact. Several of these small cut-outs can be distributed throughout a set, or grouped for accessibility, so giving local protection to components in the event of a short circuit, or a damaging fault arising. They can be wound for nominal current ratings of 100 mA to 1 A and cut out at 100 per cent overload of the rated current.

Air Radio Developments

Trends in Design as Shown by Equipment Exhibited at Farnborough

DURING the period of the National Radio Show at Earls Court another display of radio equipment was being held at Farnborough where the annual flying exhibition organized by the Society of British Aircraft Constructors was in progress. As might be expected this display was of a specialized kind, being devoted to radio apparatus for use in aircraft or directly connected with flying in one way or another.

Radio aids to navigation figured prominently among these exhibits and a number of quite different systems are being experimentally tried, but so far no one particular type stands out ahead of the others. Sooner, rather than later, a decision must be reached as to the best type for general use, since it is not economical for aircraft to carry equipment which merely duplicates the functions provided for by some other piece of apparatus.

An aid that has certain merits and which has made considerable headway in the United States and is now coming into use on the continent of Europe is a system known as VOR (v.h.f. omni-directional radio range). It enables an aircraft to fly on a definite course or obtain a bearing on one or more ground beacons without having to carry complicated or bulky equipment.

In the VOR ground beacon developed by Marconi's Wireless Telegraph Company two signals are radiated on a common carrier in the band 112 to 118 Mc/s. One, known as the reference signal has a constant phase throughout 360 degrees of azimuth but the other, which is the variable signal, has a phase which,

relative to the reference signal, varies with azimuth. At one point of the compass only are both signals in phase and this is generally magnetic north, or zero degrees, on the compass.

The two signals are combined in a simple phase-shifting network in the aircraft receiver and the amount of correction needed to bring both exactly in phase gives the angular displacement in relation to the datum line. This is translated into a meter reading of bearing in degrees.

Identification signals are superimposed on the omni-directional carrier and a v.h.f. radio-telephone communication service can also be included. An aircraft receiver for use with this beacon is under development by Standard Telephones and a prototype set is now available for operation in the band 108 to 118 Mc/s. It is similar in many respects to the STR12D v.h.f. equipment and operating ranges can be expected to be about the same. The accuracy of bearing provided is better than ±2 degrees and even smaller tolerances may be achieved when the set is in full production.

Last year DME (distance measuring equipment) operating in the 1,000-Mc/s band was shown. This year the frequencies in use seem to have fallen to about 200 Mc/s, but this may be only a temporary change. Be this as it may, two new lightweight DMEs are now available. Incidentally, this equipment operates on the interrogator-responder principle and is a development of the well-known Rebecca-Eureka used largely by the Royal Air Force during the recent war and subsequently in modified form by certain civil air services. The latest versions are considerably smaller and much lighter.

One equipment, shown by Marconi's and developed by their associated company Amalgamated Wireless (Australasia), uses two frequencies in the band 200-235 Mc/s and employs double pulses for air-to-ground interrogation and single pulses for the ground response. Pulse width and double pulse spacing serve as a means of coding and any one of 12 different beacons can be selected. The ground responses are displayed on a pointer meter in the aircraft as a measurement of distance in nautical miles and there are two ranges 0-10 and 0-100, also a subsidiary indicator (in the one unit) giving homing facilities

Plessey International teleprinter receiving terminal, Type PVR80 and (right) Redifon dual-diversity radio terminal teleprinter equipment.

in the form of a centre heading line. It is proposed to include a further indicator for orbiting a beacon and this will be adjustable for orbiting ranges of from 1 to 19 miles.

Somewhat similar in operation and in the facilities provided in the aircraft, is the new lightweight DME developed by Murphy. It is very flexible in its method of operation and either single- or double-pulse interrogation can be provided although the equipment shown at Farnborough was the single-pulse kind. Ranges are presented on a meter scaled in nautical miles with two ranges 0-20 and 0-200 miles, respectively, but the equivalent in kilometres or other units of distance can be provided.

The effective range of these beacons, which are of comparatively low power for pulsed systems (about 400 watts output from the Marconi airborne set and

Standard Telephones VOR aircraft receiver and associated units and (right) Cossor Radar lightweight Mark III Gee aircraft receiver.

800 watts for the Murphy) have yet to be determined, but between 100 and 200 miles seems likely with high-flying aircraft.

A simplified form of Gee for use in the vicinity of airports as a means of locating the runway in poor visibility, or as a guide to an air lane, has been devised by Cossor Radar. Known as the Gee Track-guide System it employs only two ground stations spaced between 6 and 10 miles apart and if these are arranged to straddle the airfield, or air lane, aircraft can navigate straight in by normal Gee homing technique. This firm has also produced a new lightweight airborne Gee receiver suitable for civil and Service use in which the operation has been very considerably simplified. It is known as the Mark III Gee receiver.

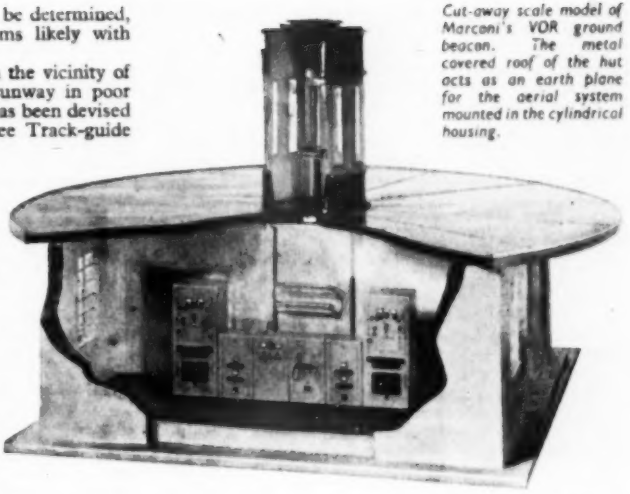

Cut-away scale model of Marconi's VOR ground beacon. The metal covered roof of the hut acts as an earth plane for the aerial system mounted in the cylindrical housing.

Flying aids as distinct from navigational aids, installed and operated from the ground and requiring no action on the part of the pilot of the aircraft except to follow ground instructions, are being developed in the 3-cm (9,000 to 10,000-Mc/s) band; they are exclusively radar aids. The very high frequency enables quite narrow beams to be radiated from small and easily controlled scanners. The latest version of the Ekco Simplified Airfield Approach aid uses a small dish-shaped scanner producing a pencil-like beam, is manually controlled in the vertical plane but linked with the v.h.f. direction finder for azimuth scanning. Range and bearing are recorded and the controller can talk the aircraft down by v.h.f. radio-telephone to within visual range of the runway. Cossor showed the comprehensive installation for large airports in the form it was described in our September last issue.

The expected time of arrival at transit airports and at the destination is an essential requirement for a safe and sure air passage and also for the smooth and efficient running of the airports concerned. It is in this connection that point-to-point radio communications play their part in present-day aviation. Some equipment of this kind was shown at Farnborough and consisted of the receiving ends, or terminals as they are now generally known, of high-speed teleprinter communication systems.

Ordinary communications receivers are rarely adaptable for this purpose as the system of radio signalling employed—frequency shift keying; FSK for short—requires special receivers of high precision and extremely good frequency stability.

A radio teleprinter terminal of this kind was shown on the stand of Plessey International; it provides for FSK operation, rapid channel changing, dual-diversity reception and temperature control of all oscillator crystals.

A similar receiving assembly was seen on the Redifon stand which likewise provides for FSK, diversity reception using spaced aerials and the very good frequency stability demanded for this service.

Under certain conditions v.h.f. may provide a more convenient point-to-point service than h.f. and a case in point is a recent installation put in by Pye as part of an aerodrome radio control scheme in New Zealand, which involved communications with a remotely placed v.h.f. transmitting station. Land lines were impracticable and a multi-channel v.h.f. radio telephone designed by Pye and Ericsson Telephones in collaboration was used. One or more radio transmitters may be used and each operates six carrier-frequency sub-channels for control and operation of the remote transmitters. Frequency modulation is used for the speech channel.

There is a tendency for the radio-telephone to replace telegraphy in all communications to and from aircraft, even on the h.f. bands. It is quicker and does not require skilled telegraphists in the crew. One example of this type of equipment is the Standard Telephones ST18B 120-watt telephony transmitter which covers 2.8 to 18.1 Mc/s and provides 24 crystal-controlled remotely-selected channels. The transmitter weighs 70 lb complete and the companion receiver, the SR18B, 29 lb. Provision is made for c.w. and m.c.w. operation.

The idea of suppressed or "buried" aerials has been carried a stage further by Standard Telephones and instead of merely sinking the aerial below the surface of the aircraft the metal skin of a part or the whole is made to behave as an aerial. Developed for the ST18/SR18 equipment it consists of a capacitor-inductor unit sunk in the wing structure and tuned by remote control. It is so arranged that the metal skin of the wing is excited by this unit and behaves as

RADIO EXHIBITORS AT THE S.B.A.C. SHOW

Burndept, Ltd., West Street, Erith, **Kent.**
E. K. Cole, Ltd., Southend-on-Sea, **Essex.**
Cossor Radar, Ltd., Highbury Grove, **London**, N.5.
The Decca Navigator Co., Ltd., 1-3, Brixton Road, London, S.W.9
Ferranti, Ltd., Ferry Road, Crewe Toll, Edinburgh.
General Electric Co., Ltd., Kingsway, London, W.C.2.
Marconi's Wireless Telegraph Co., Ltd., Chelmsford, Essex.
McMichael Radio, Ltd., Wexham Road, Slough, Bucks.
M.L. Aviation Co., Ltd. White Waltham Aerodrome, Maidenhead, Berks.
Murphy Radio, Ltd., Welwyn Garden City, Herts.
Plessey International, Ltd., Ilford, Essex.
Pye, Ltd., Cambridge.
Redifon, Ltd., Broomhill Road, Wandsworth, London, S.W.18.
Salford Electrical Instruments, Ltd., Silk Street, Salford, Lancs.
Sangamo Weston, Ltd., Gt. Cambridge Road, Enfield, Middlesex.
Standard Telephones & Cables, Ltd., Connaught House, Aldwych, London, W.C.2.
Ultra Electric, Ltd., Western Avenue, Acton, London, W.3.
Westinghouse Brake & Signal Co., Ltd., 82, York Way, Kings Cross, London, N.1.

radiator for the transmitter, or conversely as a receiving system.

Some quite interesting lightweight v.h.f. radio telephone sets designed primarily for use in privately owned aircraft have made their appearance this year. Marconi have a very small set appropriately called the "Air-Mite"; it is crystal controlled using overtone crystals and provides also inter-communication facilities between pilot and passenger. Complete, it weighs 10 lb, gives 750 mW output on any frequency in the band 111.5 to 122.5 Mc/s.

Another lightweight set made by Burdept weighs 8 lb, consumes 55 watts only and gives 1.5 W output on a single crystal-controlled frequency in the band 117 to 128 Mc/s.

Concurrently with the Farnborough display of aircraft radio equipment was another exhibition held at Bovingdon and organized by International Aeradio. Here the equipment for use in control towers at large and small airports was shown. It consisted largely of apparatus made by well-known firms in the radio industry, the part International Aeradio play being the engineering or assembly of different types of equipment into one coherent and easily controllable unit.

Technical Training

"APART from the rapid and continuous expansion of broadcasting and television, radar and communications, the vast possibilities of radio-frequency enginering or electronics applied to industrial, medical and other uses, secure a continuity of employment well beyond the foreseeable future." In these words, the Radio Industry Council sums up in the pamphlet "Radio as a Career"* the possibilities of employment in the industry.

Under the ægis of the R.I.C. a Technical Training display, which included an information bureau, was equipped and manned throughout the Radio Show by a number of colleges. Although the number of enquiries was not large compared with those received on the "popular" stands, the display met a need which has often been expressed in these pages. It is thought, therefore, that a summary of the questions asked and the answers given might be of interest. Incidentally, it was not realized by a number of enquiring parents that *radio* courses were suitable for their sons who wanted to "take up electronics."

The majority of enquiries were from parents asking what subjects their sons, who had received their General Certificate of Education, should take when studying for their "Higher." The answer generally given was physics preparatory to studying for a degree or taking a full-time course in electronics or telecommunications at a Technical College.

Parents, who for one reason or another, did not want their sons to continue at school after 16 were told to apply to a nearby radio manufacturer for details of apprenticeship schemes, most of which come within the scope of the code laid down by the R.I.C. (see *W.W.* August, page 311). These schemes provide for a sandwich or part-time release course (usually one day a week at a technical school) at the end of which the trainee takes the ordinary National Certificate exam. in electrical engineering. This is followed by a further two years' preparation for the Higher N.C.

*Available from the R.I. Council, 59, Russell Square, London, W.C.1, and local Youth Employment Bureaux.

WIRELESS BEST-SELLERS

WHEN the foundations of *Wireless World* were laid over 40 years ago, those responsible for this journal could hardly have foreseen that publications issued by their successors would rival novels, thrillers and political scandal-books as best-sellers. In 1911 the potential readership of any kind of technical wireless book could hardly have reached 5,000 throughout the whole of the world.

Things have changed. According to a recent issue of W. H. Smith's bookstall and bookshop *Trade Circular*, W. T. Cocking's "Television Receiving Equipment" is "considerably easier to sell than any novel, including 'The Cruel Sea.'" Another *Wireless World* publication "The Williamson Amplifier" is surprisingly popular, considering its specialized appeal; a bookshop manager, writing in the *Trade Circular*, said "There is no knowing how many copies I have sold."

But the record for sales is held by our humblest booklet "Learning Morse," which during the war ran to 11 editions and over a third of a million sales. It served as a textbook for the majority of entrants to the radio communication branches of the Services, and its sales probably exceeded those of the famous non-specialist "best sellers" of the period. That in spite of the fact that it offers no easy road to the acquisition of skill and knowledge. All the stress is on correct methods, but the booklet does give one short cut to proficiency in manipulation of a morse key that had not, we believe, been described elsewhere before it appeared in the later editions.

"Learning Morse," which has just reached the 12th edition (345th thousand, with minor revisions) is issued by our Publishers at 1s (postage 1½d).

Club News

Birmingham.—The Slade Radio Society, in collaboration with the Midland Amateur Radio Society, is participating in the exhibition organized by the Sutton Coldfield and North Birmingham Model Engineering Society at Church House, High Street, Erdington, on October 2nd, 3rd and 4th, where a transmitter will be installed. The two clubs will also be uniting for a jubilee dinner at the Imperial Hotel, Birmingham, on October 25th, celebrating Slade's 25th anniversary and M.A.R.S's "coming of age." Sec.: (Slade) C. N. Smart, 110, Woolmore Road, Erdington; (M.A.R.S.) H. B. Bligh, 52, Norman Road, Birmingham, 31.

Brighton.—Dr. F. W. Alexander, of the B.B.C. Operations and Maintenance Department, will talk to members of the Brighton and District Radio Club on October 14th about studio acoustics, microphones and related problems. On October 28th a representative of Thermionic Products will demonstrate the Soundmirror tape recorder. Meetings are held at 7.30 each Tuesday at the Eagle Inn, 125, Gloucester Road, Brighton. Sec.: R. T. Parsons, 14, Carlyle Avenue, Brighton, 7.

Cleckheaton.—At the meeting of the Spen Valley and District Radio and Television Society at the Temperance Hall, Cleckheaton, at 7.30 on October 8th, J. Rose will speak on the optics of projection television. On October 5th and 16th members will visit the Holme Moss television station. The club meets on alternate Wednesdays at 7.30 at the Temperance Hall. Sec.: N. Pride, 100, Raikes Lane, Birstall, Nr. Leeds.

Leicester.—A demonstrated lecture on cinema sound-recording equipment will be given to the Leicester Radio Society by H. Turner (G8VN) at 7.30 on October 6th at the Holly Bush Hotel, Belgrave Gate, Leicester. Meetings are held on the first and third Mondays of each month at 7.30. Sec.: A. L. Milnethorpe, 3, Winster Drive, Thurmaston, Nr. Leicester.

Commercial Broadcasting

Reactions in this Country and Experiences Overseas

"DO you approve or disapprove of the plan for television to be sponsored by advertisers?" This question was asked in a recent Gallup Poll survey of a representative cross-section of the population and the result of the investigation, quoted in the *News Chronicle*, shows that the reactions of the public fall into three groups of almost equal size—those approving of the idea, those opposed to it and those who are undecided. The *News Chronicle* states that 50 per cent of the present owners of television sets welcome the government proposals.

In view of this investigation it may be of interest to quote the opinions of Lord Simon of Wythenshaw, who during the past five years has been chairman of the B.B.C. Contributing to *The Times* recently he stressed the need for consulting the experience of other countries before embarking on the proposed scheme of introducing commercial television stations in competition with the B.B.C.

After summarizing the present situation in the United States he instances the experience, so far as sound broadcasting is concerned, of our older dominions, which is perhaps "more relevant to British conditions."

The four dominions concerned (Australia, Canada, New Zealand and South Africa) all have large areas which are expensive to cover. All of these have been forced to seek additional revenue from advertising. Australia and Canada have national services, similar to the B.B.C., and also a large number of competitive commercial stations, but both South Africa and New Zealand have a dual system of public service and commercial broadcasting under the single control of the national broadcasting organization.

In Lord Simon's opinion the example from which most can be learnt by Britain is that of South Africa. Up to 1947 South Africa had a public service monopoly of broadcasting similar to that of the B.B.C. In that year the Government decided that in order to increase the revenue it was desirable to introduce commercial broadcasting. "They wisely," says Lord Simon, "decided to send the director-general of the South African Broadcasting Corporation, Gideon Roos (a Rhodes Scholar), to investigate public service and sponsored broadcasting in the United States, Canada, Britain, Australia and New Zealand. He reported that independent commercial radio competing with a national public service system would cause very serious damage to that system, but that a commercial network under the control of the national system would provide large additional revenue and could be so managed as not to cause serious damage to public service broadcasting."

This policy, adds the writer, was adopted, and is regarded in South Africa as an outstanding success. There has been a great increase in revenue and in the total amount of listening and it is understood that standards of public service broadcasting have been maintained.

Since the publication of Lord Simon's article, the director-general of Radio Ceylon has pointed out in a letter to *The Times* that a dual system of public service and commercial broadcasting has operated under the single control of the Island's national broadcasting organization for the past two years. This, he says, has proved most successful, engendering healthy competition between the two services with a resulting improvement in the standards of presentation and programme content.

The facts quoted by Lord Simon as regards the Dominions are all concerned with sound broadcasting, because there is no experience of television. But, as he says, there is no reason to suppose that the effects of commercial broadcasting in television would be in any way different from those in sound. He adds, "while I entirely agree with the view that the South African system of mixed public service and commercial broadcasting under a single board of governors would be much less harmful than the proposal of the Charter, yet I hold strongly that the present system of public service broadcasting is by a long way the best for this country."

Short-wave Conditions

Predictions for October

THE full-line curves given here indicate the highest frequencies likely to be usable at any time of the day or night for reliable communications over four long-distance paths from this country during October.

Broken-line curves give the highest frequencies that will sustain a partial service throughout the same period.

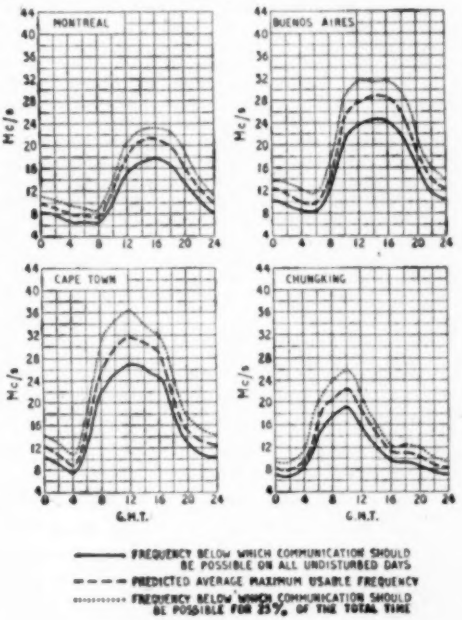
MONTREAL
BUENOS AIRES
CAPE TOWN
CHUNGKING
Mc/s
G.M.T.
FREQUENCY BELOW WHICH COMMUNICATION SHOULD BE POSSIBLE ON ALL UNDISTURBED DAYS
PREDICTED AVERAGE MAXIMUM USABLE FREQUENCY
FREQUENCY BELOW WHICH COMMUNICATION SHOULD BE POSSIBLE FOR 25% OF THE TOTAL TIME

Negative-Feedback Tone Control

By P. J. BAXANDALL
B.Sc.(Eng.)

Independent Variation of Bass and Treble Without Switches

THE circuit to be described is the outcome of a prolonged investigation of tone-control circuits of the continuously-adjustable type, and provides independent control of bass and treble response by means of two potentiometers, without the need for switches to change over from "lift" to "cut." Unusual features are the wide range of control available, and the fact that a level response is obtained with both potentiometers at mid-setting. The treble-response curves are of almost constant shape, being shifted along the frequency axis when the control is operated, and there is practically no tendency for the curves to "flatten off" towards the upper limit of the audio range. The shape of the bass-response curves, though not constant, varies less than with most continuously-adjustable circuits.

The "Virtual-Earth" Concept.—The performance outlined above has been achieved by the use of a negative-feedback circuit instead of the more usual passive type of network[1,2] and it is desirable that the reader should become familiar with the "virtual-earth" concept[3] as applied to feedback amplifiers, before the operation of the tone-control circuit is considered in detail. The idea behind this concept is quite simple, and may be explained with reference to Fig. 1, in which all irrelevant details such as blocking capacitors, grid bias, etc., have been omitted, and in which V_{in} and V_{out} refer to a.c. components only. If the input resistor, R_{in}, is made equal to the feedback resistor, R_{fb}, then the circuit becomes the well-known "see-saw" or "anode-follower" phase-splitter,[4,5] and gives an output voltage which is 180 degrees out of phase with the input voltage and of slightly smaller magnitude. Now the a.c. voltage at the grid is equal to the output voltage divided by the valve gain, which may be 100 or more if the valve is a pentode, so that for many purposes the grid voltage is negligibly small in comparison with V_{in} and V_{out}. By thus neglecting the grid voltage, the following approximate relationships may be immediately deduced :—

$$I_{in} \doteq V_{in}/R_{in} \qquad (1)$$

$$I_{fb} \doteq V_{out}/R_{fb} \qquad (2)$$

where I_{in} and I_{fb} are as shown in Fig. 1.

If grid current in the valve is also negligible, which is normally the case, the application of Kirchhoff's first law (or just common sense!) to the junction of R_{in} and R_{fb} gives $I_{in} + I_{fb} = 0$, so that, from (1) and (2) :—

$$V_{in}/R_{in} + V_{out}/R_{fb} \doteq 0$$

$$\text{i.e., } V_{out}/V_{in} \doteq -R_{fb}/R_{in} \qquad (3)$$

When the grid voltage is neglected in this way, the grid is often called a "virtual-earth" point, and the use of this concept, though not necessary for dealing with a simple circuit such as Fig. 1, is found to be very helpful when dealing with more elaborate arrangements, and frequently gives one a far clearer physical picture of what is going on than does a straightforward mathematical analysis. The great practical value of this method of approach appears to have been first fully appreciated by Professor F. C. Williams, who also introduced the name "virtual earth."

Treble-Lift Circuit.—The basic circuit used for obtaining treble lift is shown in Fig. 2, in which the potentiometer P is made of sufficiently low resistance to ensure that the voltage at its slider, when the latter is at the middle of the element, is not appreciably affected by the current supplied to C even at the top end of the audio range. Let k be the fraction of the total potentiometer resistance lying between the slider and earth; then the total input current, I_{in}, flowing towards the virtual earth, is $I_1 + I_2$, where I_1 is approximately V_{in}/R_{in} and I_2 is approximately $jkV_{in}\omega C$. The feedback current, I_{fb}, is approximately V_{out}/R_{fb} and the application of Kirchhoff's first law to the virtual-earth junction gives $I_1 + I_2 + I_{fb} = 0$ and hence the relationship :—

$$V_{in}/R_{in} + jkV_{in}\omega C + V_{out}/R_{fb} \doteq 0$$

which may be rearranged in the form :—

$$V_{out} \doteq -V_{in}(R_{fb}/R_{in} + jk\omega CR_{fb}) \qquad (4)$$

It will be seen later that in order to combine this treble-lift circuit in a satisfactory manner with the treble-cut circuit, R_{fb} should be made equal to R_{in}; then, using R in place of these symbols, equation (4) becomes :—

$$V_{out} \doteq -V_{in}(1 + jk\omega CR) \qquad (4a)$$

The output voltage may thus be regarded as having two components, one of which is independent of frequency (for a constant value of V_{in}), whereas the other one, leading in phase by 90 degrees as indicated by the operator "j," has its magnitude proportional

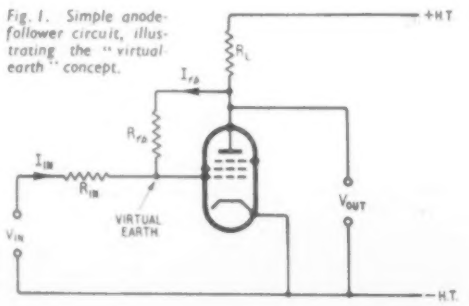

Fig. 1. Simple anode-follower circuit, illustrating the "virtual-earth" concept.

[1] "Getting the Best from Records—Part III" by P. G. A. H. Voigt, *Wireless World*, April 1940.
[2] "Simple Tone Control Circuit" by E. J. James, *Wireless World*, Feb. 1949.
[3] Section 2.5 of "Waveforms," Book 19 of Radiation Laboratory Series, published by McGraw-Hill.
[4] "The See-saw Circuit" by M. G. Scroggie, *Wireless World*, July 1945.
[5] "The Anode-Follower," by B. H. Briggs, *R.S.G.B. Bulletin*, March 1947.

to freq ency and proportional to the potentiometer setting k.

Plotting $\left|\frac{V_{out}}{V_{in}}\right|$ in decibels, with the usual logarithmic frequency scale, as shown in Fig. 3, and letting 0 db correspond to $|V_{out}| = |V_{in}|$, the constant term in equation (4a) is represented by a horizontal dotted line through 0 db and the term proportional to frequency is represented by a line such as one of the chain-dotted sloping lines, the position of the line depending on the potentiometer setting k. The full-line curves represent the manner in which the actual total output varies, and it will be noticed that at low frequencies the total output curve is very close to the I_1 curve, whereas at high frequencies, where I_2 is much greater than I_1, the total curve almost follows the I_2 curve. The effect of varying the potentiometer setting k will be seen to be that of shifting the response curve along the frequency axis. At a point such as "P" the two output components are of equal magnitude, and because of the 90-degree phase angle between I_1 and I_2, the total output voltage will be $\sqrt{2}$ times that of each output component, or, in other words, the response will be 3db up.

Treble-Cut Circuit.—For treble cut the basic circuit is as shown in Fig. 4. The same method of analysis as was used for the treble-lift circuit gives :—

$$V_{in}/R_{in} + V_{out}/R_{fb} + jkV_{out}\omega C \doteq 0$$

$$\text{Hence } V_{out} \doteq \frac{-V_{in}}{R_{in}/R_{fb} + jk\omega CR_{in}} \quad \ldots \quad \ldots \quad (5)$$

Making R_{fb} equal to R_{in}, as mentioned previously, and using R in place of these symbols, equation (5) becomes :—

$$V_{out} \doteq \frac{-V_{in}}{1 + jk\omega CR} \quad \ldots \quad \ldots \quad \ldots \quad \ldots \quad (5a)$$

Comparing equation (5a) with equation (4a), it will be seen that, for the treble-lift circuit, V_{out} is approximately equal to V_{in} *multiplied* by $-(1 + jk\omega CR)$, whereas for the treble-cut circuit V_{out} is approximately equal to V_{in} *divided* by $-(1 + jk\omega CR)$. Hence at any particular frequency and potentiometer setting the response of the Fig. 4 circuit will be "down" by the same number of decibels as that of Fig. 2 is "up," so that the response curves of the two circuits, for each potentiometer setting k, will be "mirror images" in the 0 db line.

Combined Treble-Control Circuit.—In order to obtain treble lift or cut with single-knob control, the two circuits just described may be combined by using a centre-tapped potentiometer, which is available commercially in carbon-track form at a price only slightly in excess of that for an ordinary potentiometer. The centre-tap is earthed, one end of the element is connected to the input terminal, the other end is connected to the valve anode (via a coupling capacitor in practice), and the slider is connected to the capacitor C. Then, when the slider is on the input side of the centre-tap, the circuit becomes that of Fig. 2, and gives treble lift, whilst moving the slider to the anode side of the centre-tap gives the Fig. 4 circuit and provides treble cut. When the slider is at the centre-tap, the capacitor C is joined between virtual earth and actual earth, but the voltage between these two points is so small, when a high-gain valve is used, that the current taken by the capacitor has a negligible effect on the frequency response within the working frequency range.

Bass-Control Circuit.—Fig. 5 shows the circuit

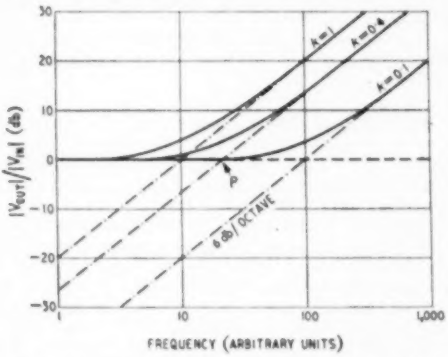

Fig. 3. Diagram showing how the Fig. 2 circuit gives a curve of constant shape but variable position. 0 db represents $V_{out} = V_{in}$. Dotted line—output due to I_1 ; chain dotted lines—output due to I_2 ; solid curves—total output.

Fig. 4. Basic circuit used for treble cut. R_{in} is made equal to R_{fb}.

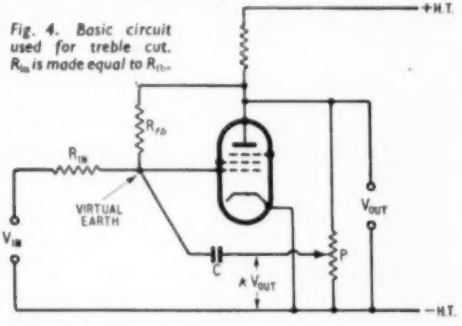

Fig. 2. Basic circuit used for treble lift. R_{in} is made equal to R_{fb}.

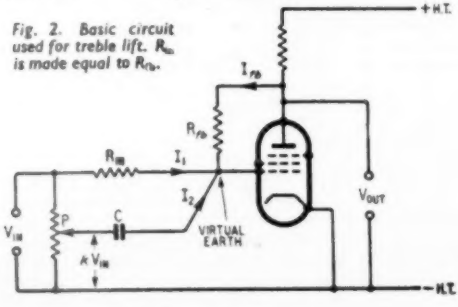

Fig. 5. Basic circuit used for bass lift and cut. $R_1 = R_2$ and $C_1 = C_2$.

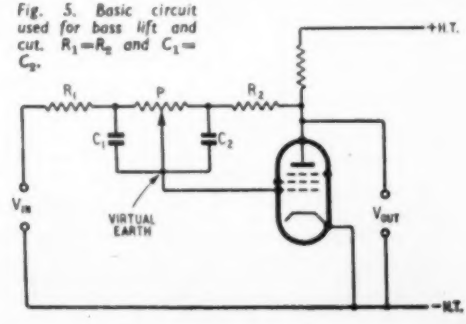

used for bass lift and cut, omitting irrelevant details as before.[1] In order to give level response with the potentiometer at mid-setting, and to allow the circuit to be easily combined with the treble-control circuit, R_1 and C_1 are made equal to R_2 and C_2. At middle and high frequencies the potentiometer is almost "shorted out" by the low reactances of C_1 and C_2, so that the circuit becomes almost the same as Fig. 1 with $R_{1a} = R_{1b}$ and a gain of approximately unity is obtained. As the frequency is lowered, the gain gradually rises or falls towards an asymptotic level determined by the potentiometer setting; and, as with the treble-control circuit, the response curves are approximately mirror images in the 0 db line for equal potentiometer displacements either side of the level-response setting.

The amount, in decibels, by which the gain of the Fig. 5 circuit departs from unity, is given approximately by:—

$$\text{Lift, in db} = 20 \log \frac{|Z_{1b}|}{|Z_{1a}|} \qquad \ldots \quad \ldots \quad (6)$$

where $|Z_{1a}|$ and $|Z_{1b}|$ are the moduli of the impedances between input terminal and grid and between anode and grid respectively. (Note, if an impedance calculated by means of the "j" notation comes out to $R + jX$, the modulus, or magnitude, is $\sqrt{R^2 + X^2}$; see reference (6).) Equation (6) may be used to calculate the response curves, point by point, for various potentiometer settings—a straightforward though time-consuming process! The "cross-over" effect noticeable with some of the measured bass curves shown in Fig. 8 may seem surprising at first, but it is quite genuine and equation (6) gives just the same result.

Complete Tone Control.—Fig. 6 shows the final circuit evolved, which is, effectively, a combination of the treble and bass circuits described above. There is, however, one point about the relation between Fig. 6 and the previous circuits which may need some explanation. At middle and high frequencies, where C_1 and C_2 in Fig. 6 may be regarded as short-circuiting the potentiometer P_1, the relevant part of the circuit becomes as shown in Fig. 7(a). It will be seen that the three resistors R_1, R_2 and R_3 are connected in "star" between the three points A, B and C. Now it is well known that, as far as the external circuit is concerned, three resistors in "star" are exactly equivalent to three resistors, of suitably different values, connected in "delta"[7] so that Fig. 7(a) is equivalent to Fig. 7(b). In Fig. 7(b), the presence of R_4 cannot appreciably affect the frequency response, because the resistance is between two points A and B both of which have a relatively low impedance to earth (point A, since the source of input voltage is assumed to be of low impedance; and point B, because it is the output terminal of an amplifier having voltage negative feedback). Hence, ignoring R_4 for the above reason, Fig. 7 (b) is equivalent to a combination of the treble lift and cut circuits of Figs. 2 and 4, and therefore Fig. 7 (a) is also equivalent to this combination. The relation between star and delta networks is such that if R_1 is made equal to R_2 in Fig. 6, which is essential for giving "mirror image" lift and cut curves, then R_a and R_b in Fig. 7 (b) are each equal to $R_1 + 2R_2$. The important practical result of this reasoning is that the treble response will be 3 db up or down, at full-lift or full-cut settings respectively, at the frequency for which the reactance of C_2 in Fig. 6 is numerically equal to $R_1 + 2R_2$.

The values of the main components in Fig. 6 were decided as follows. P_1 was fixed at 1 MΩ, this being considered the highest really desirable value for a carbon potentiometer. To give about 20 db asymptotic bass lift and cut, the nearest standard value for R_1 and R_2 was 100 kΩ. A suitable compromise for C_2 was 100 pF, on the grounds that, to obtain a result in accordance with calculation, the value should be large in relation to likely wiring strays, but that too large a value would result in an undesirably low impedance being thrown across the source of V_{in}. The value of P_2 then had to be chosen so that, with the slider half way between the centre-tap and one end the effective internal resistance of the potentiometer, regarding it as a generator feeding C_3 should be not more than, say, half the reactance of C_3 at 10 kc/s. Now the reactance of 100 pF at 10 kc/s is

[1] "'Tone': What it is and How to Use it," by Cathode Ray, *Wireless World*, February 1948.

[7] "Electric Circuits and Wave Filters," by A. T. Starr, p. 80 published by Pitman.

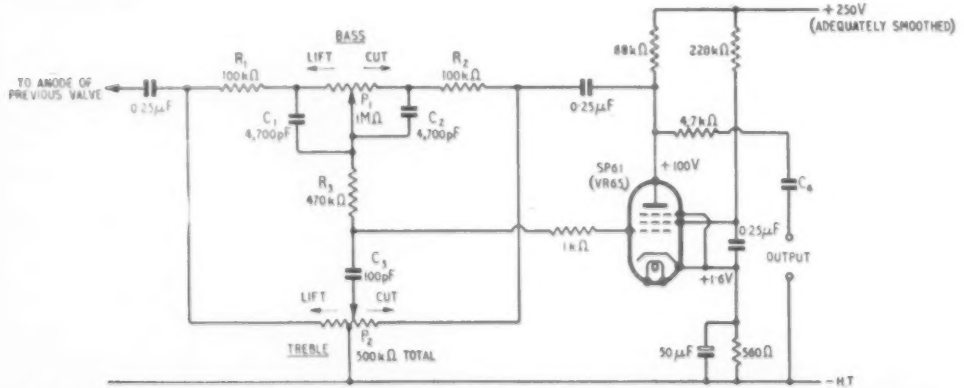

Fig. 6. The complete tone-control circuit. R_1, R_2, C_1, C_2, R_3 and C_3 should preferably be within 5 per cent of marked values. P_1 and P_2 is Dubilier Type 'C' control, 500kΩ, with fixed tapping at 50 per cent rotation. C_4 should normally be 0.05μF if following stage has 250-kΩ grid-leak.

approximately 160 kΩ, and using a total value of 500 kΩ for P_2, each half is 250 kΩ and the internal generator resistance referred to is thus 250/4, i.e., 62.5 kΩ, which, being less than half the capacitor reactance, was regarded as satisfactory. The values of C_1 and C_2, which must always be equal, were then chosen to position the bass curves at an appropriate part of the frequency scale, and R_3 was selected to do the same for the treble curves.

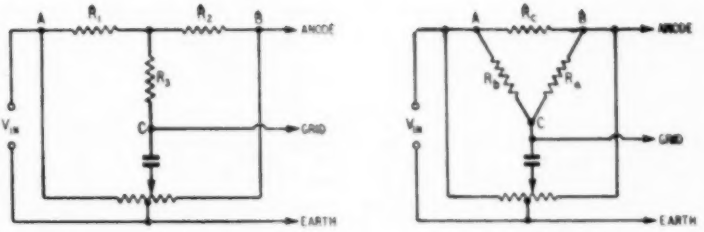

Fig. 7. (a) At middle and high frequencies, the resistors R_1, R_2, and R_3 of Fig. 6 are effectively connected in "star"; (b) shows the equivalent "delta" network.

A high-slope pentode valve was employed in order to obtain a high gain between grid and anode, thereby ensuring close agreement between the measured results and those given by the approximate analysis presented above. A further reason for using a high-slope pentode was that, in a feedback circuit such as this one, where the gain with feedback is almost independent of the actual valve gain, the non-linearity distortion would have been greater if a low-slope pentode or a triode had been used—an important fact which does not seem to be sufficiently widely known.

The circuit as shown in Fig. 6 will deliver an output of 4V r.m.s. without introducing more than 0.1 per cent total harmonic distortion, for any signal frequency up to 5 kc/s and at any setting of the potentiometers.

The full-line curves in Fig. 8 show the measured performance obtained with the circuit of Fig. 6. The dotted curves were obtained with the same circuit, except that the centre-tap of P_2 was disconnected from earth. The writer does not regard the dotted curves as being, for normal purposes, of so desirable a shape as the full-line curves, but since this is a very controversial matter, it may reasonably be claimed as an advantage of the circuit that the alternative curve shapes may be made available merely by adding a single-pole on-off switch.

Fig. 8. Measured response curves for circuit of Fig. 6 (all components within 5 per cent of marked values; C_4 = 0.25μF with 250-kΩ output load). Labels on curves are resistance values between potentiometer slider and centre of element. Dotted curves are with P_2 centre-tap disconnected from earth.

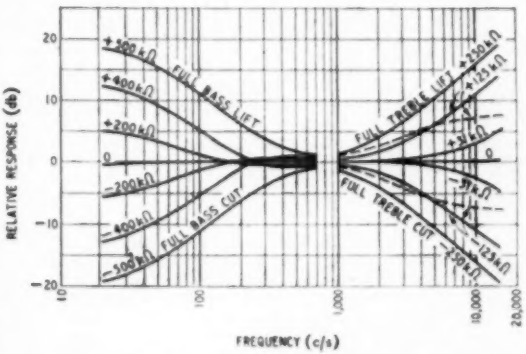

Associated Circuits.—In conclusion, a few comments on how to incorporate the tone control in pre-amplifier circuits may be useful. These comments will be of a very general nature, because it is intended, in later articles, to describe the design of suitable pre-amplifier circuits in detail. The main points are:—

(a) The middle-frequency voltage gain of the tone-control circuit being approximately unity, it may be inserted in a pre-amplifier without appreciably altering the available gain.

(b) The output impedance of the circuit feeding the tone-control circuit should be reasonably low, preferably not more than about 10 kΩ if the tone-control elements have the values given in Fig. 6. With sources having resistive internal impedances considerably greater than 10 kΩ, R_1 in Fig. 6 may be reduced by an amount equal to the internal resistance of the source; this will give bass-lift, bass-cut and treble-cut curves as published, but less than the published treble-lift will be available.

(c) The output impedance of the tone-control circuit is quite low, because of the voltage negative feedback, and capacitance up to about 500 pF may be shunted across the output without seriously affecting the performance. This property may be employed usefully if the tone-control stage comes at the output end of the pre-amplifier, since it will then be possible to use a fairly long coaxial cable to feed the main amplifier, without the need for a cathode-follower output valve in the pre-amplifier. The feedback loop of the Fig. 6 circuit includes two phase lags at high frequencies, giving rise to a peak in the response at a frequency much above the top of the audio band; the cable capacity on the output lowers the frequency of the peak and greatly increases its magnitude, but the magnitude may be kept small by the addition of a 4.7-kΩ resistor in series with the pre-amplifier output, as shown in Fig. 6.

(d) The choice of valve is not critical, and for the less exacting kind of application quite satisfactory results may be obtained using half a double triode, e.g., 6SN7 or BCC40. The anode-to-grid capacity will cause the treble-lift curves to depart by several db from the published ones, but this is unlikely to be of much consequence in practice.

Because of the high impedance in the grid circuit, it is preferable, when very good signal-to-hum ratio is required, to use a top-grid type of valve. When the signal input level at the input to the tone-control is much less than 1 volt r.m.s., a Mullard EF37A is recommended.

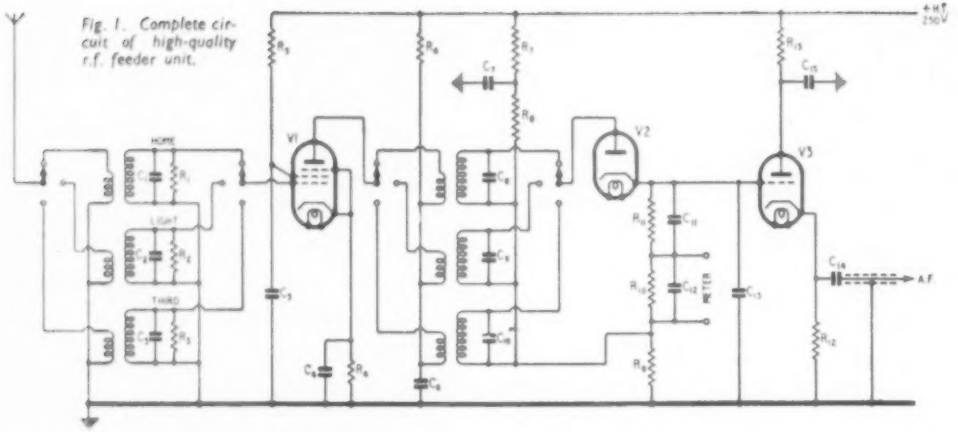

Fig. 1. Complete circuit of high-quality r.f. feeder unit.

"No Compromise" R.F. Tuner

Unit with Minimum Distortion for Use in Favourable Reception Areas

By W. WINDER, A.M.I.E.E.

AMONGST high fidelity enthusiasts the origins of distortion are generally appreciated, but most receivers, however ambitiously conceived, usually admit some compromise between conflicting factors. In the old days, when 5 per cent harmonic distortion in the output stage was thought to be acceptable, there was no future in chasing smaller traces of non-linearity in the detector and r.f. amplifier, but now that modern design has produced negative-feedback audio-frequency amplifiers of extremely low distortion, there seems to be some point in attacking these residual troubles. At any rate, the writer decided to build a "no compromise" tuner just to see what improvement could be made, and the results are sufficiently encouraging to pass along details to other enthusiasts. Compared with various r.f. tuners of conventional design the audible results are distinctly cleaner and crisper.

There is nothing special to say about frequency distortion; it is just a matter of the number and Q of the tuned circuits. In the present case, two damped circuits are used, giving good high-note response, and in the Midlands allowing interference-free reception of Third and Light programmes. London Home station is received there free from interference in the daytime, but sometimes has an audible neighbour after dark. Departure from normal practice is with the detector circuit and r.f. amplifier.

The main requirements for minimum diode detector distortion are (1) that the diode load shall be high compared with the internal resistance of the diode, (2) that the a.c./d.c. load ratio shall be as nearly as possible unity, (3) that the input r.f. voltage to the diode shall be ample—4 volts r.m.s. is usually thought to be adequate, but 6 volts is better.

With the normal circuit, where the diode feeds directly into an a.f. amplifier (and volume control), requirements (1) and (2) are mutually contradictory, and even with non-optimum values of diode load and volume control, a.c./d.c. load ratios are apt to be far from unity. Since "no compromise" was the motto in this case a different arrangement had to be found. Several methods were tried, and the final answer was to follow the diode with a directly coupled cathode follower. Except for the input capacitance of the cathode follower (about 10 pF) the a.c. load and the d.c. load are identical, thus achieving the desired unity

Component Values in Fig. 1

R_1	See text	R_8	100 kΩ
R_2		R_9	47 kΩ
R_3		R_{10}	10 kΩ
R_4	220Ω	R_{11}	220 kΩ
R_5	33 kΩ	R_{12}	10 kΩ
R_6	4.7 kΩ	R_{13}	33 kΩ
R_7	220 kΩ		
C_1	See text	C_8	See text
C_2		C_9	
C_3		C_{10}	
C_4	0.1μF	C_{11}	30pF
C_5	0.1μF	C_{12}	0.1μF
C_6	0.1μF	C_{13}	50pF
C_7	1.0μF	C_{14}	0.1μF
		C_{15}	1.0μF
V_1	EF50	(not critical)	
V_2	VR92, EA50, 6D1	(not critical)	
V_3	Any medium triode or r.f. pentode strapped as triode.		

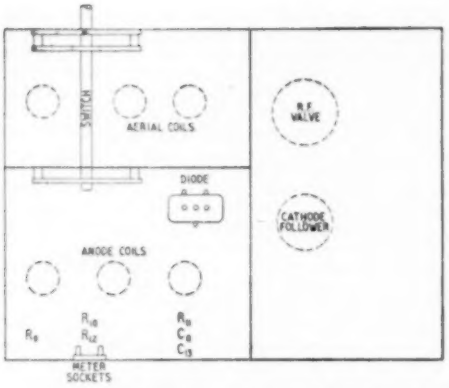

Fig. 2. Suggested layout for the principal components

ratio without any compromise in the value of the diode load.

The cathode follower provides a secondary advantage. Normally any tuning unit will be joined to its a.f. amplifier by a longish screened lead, which, in spite of its screening, may pick up hum, and because of its screening will introduce undesirable capacitance effects. The low output impedance of the cathode follower reduces both of these troubles.

Turning to the r.f. amplifier, it is as well to remind ourselves of the variety of working conditions under which such an amplifier usually operates, varying from optimum bias with a weak signal to a condition of near cut-off on a strong local station. Here, where we are concerned at any suspicion of non-linearity, there is a case for working always at optimum bias, for it must be remembered that we are asking our r.f. amplifier to feed the detector with 6 volts r.m.s. signal. This is equivalent to 8½ volts peak, or 17 volts peak-to-peak. On 100 per cent modulation this becomes 34 volts peak-to-peak, and to provide this output with a suitable factor of safety it was decided to dispense with any form of r.f. gain control and operate the valve under conditions of maximum undistorted output. With this condition of fixed gain the input signal has to be controlled, and this is best done by a damping resistance across the tuned aerial circuit, a method which conveniently flattens the tuning where a strong signal is available and selectivity therefore least required. This calls for a separately damped aerial circuit for each wanted station. Because of this, and because the directly coupled cathode follower prevents the intervalve tuned circuit from being earthed, the use of a ganged capacitor and variable tuning has not been adopted. There is a separately tuned circuit for each station.

Fig. 1 shows the complete circuit. The values of C_1, C_2, C_3, C_4, C_9 and C_{10} are found by trial and error, and are such that they bring the tuned circuits to resonance at the required frequencies somewhere within the range of the coil inductance tuning slugs. They will depend on which stations are required in any particular district. Similarly R_1, R_2 and R_3 must also be found by trial and error. They should be so adjusted in value that in each case the diode current

Fig. 3. Switched two-channel feeder unit incorporating the low-distorton r.f. unit for local stations

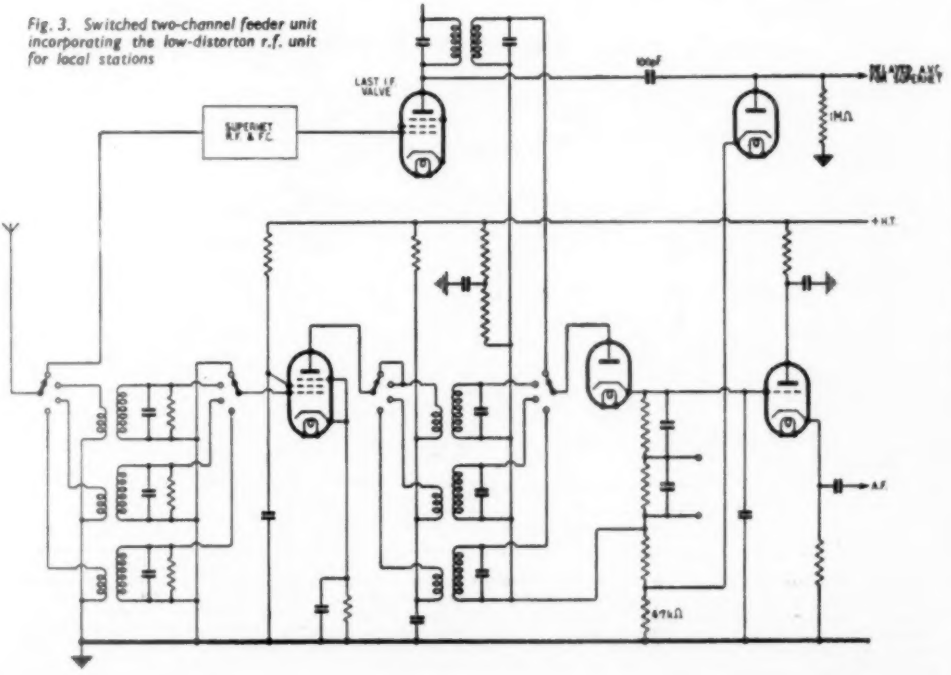

is limited to 25-30 microamps. No attempt should be made to increase the diode current beyond 40 microamps, as soon after this the EF50 shows signs of overloading. R_{11} and C_{12} have been included merely to provide a simple means of plugging in a meter for reading diode current—they contribute nothing to the circuit proper.

The only other points needing clarification are the direct coupling arrangements to the cathode follower. R_8 has a dual purpose. In conjunction with C_{11} it forms an r.f. filter following the detector. Also it is fed with current from the h.t. line, so that the voltage drop across it, plus the d.c. component of the rectified signal, bring the grid of the cathode follower to the correct working potential in relation to its cathode, the latter being some 35 volts above earth. The circuit is remarkably self-adjusting, and works quite happily without change of component values when fed from a 400-volt or a 250-volt h.t. line, and it will cheerfully accommodate a wide range of input signals without departing far from optimum bias. No trouble need be anticipated in the balancing arrangements due to change of valve characteristics with age. R_7 and R_8 also serve dual purposes. In total they regulate the balancing voltage across R_9. Also R_{11} together with C_{13} prevents 100-c/s ripple from the h.t. line from getting to the a.f. circuits. Without R_8 interposed between R_9 and C_7 the filtering effect of R_8 would be short-circuited.

As mentioned previously, no values have been given for the tuned circuits, for their frequencies will depend on choice of stations, and the damping resistances will depend on local field strengths and aerial efficiency. As a guide, in Leicester, using an indoor aerial, both Third programme and long-wave Light programme called for 100 kΩ across the aerial secondary, whilst London Home station needed no damping at all. In the same district, on a more efficient aerial, the damping resistances for Third and Light had to be reduced to 50 kΩ.

On the constructional side the chief point is to see that the aerial circuits are well screened from the anode coils (Denco "Maxi Q" coils were used in the original design). In view of the high gain of the EF50 sketchy screening will not do, and it is safest to use separately screened compartments, each containing its own switch wafer. Fig. 2 shows a satisfactory layout of the main components.

For the purely local station listener in certain localities such a tuner as described would provide all that is necessary. For listeners who do not wish to be restricted to three stations, or who live in districts which call for occasional stringent selectivity requirements, and who at the same time would like to use a high-quality tuner when occasion allowed, a two-channel receiver is suggested. One channel would be the receiver as described, and the other would be a normal superheterodyne built on the same chassis. Fig. 3 shows more or less schematically how simply this could be arranged. The station selector switch would be four-way instead of three-way, but no extra wafers would be required. The only other change in the circuit is to introduce a 4.7-kΩ resistance between R_9 and earth, to provide a delay for the a.v.c. diode.

AMERICAN IDEAS FOR TRANSATLANTIC TELEVISION

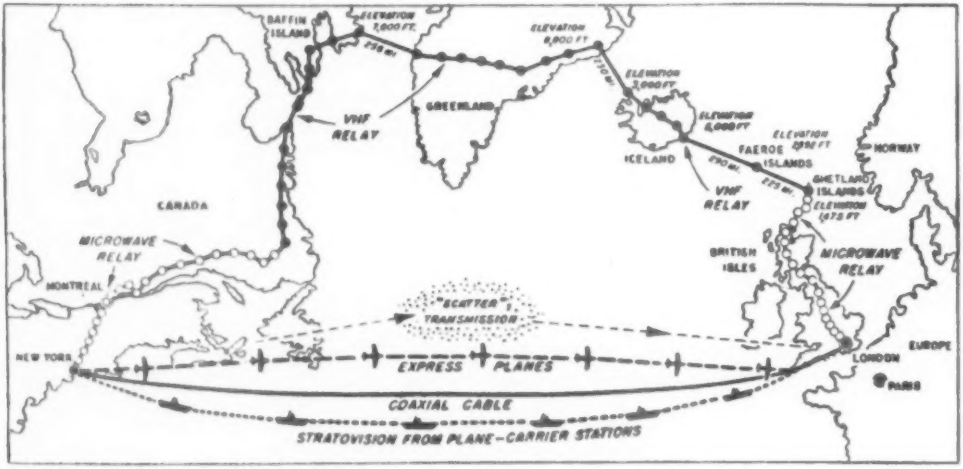

This map, taken from "Tele-Tech" for August, 1952, illustrates some of the methods which, our American contemporary urges, should be investigated in an attempt to provide, as a matter of urgency, the means for transatlantic exchanges of television programmes. The methods mentioned are: (1) Aircraft relay, with a dozen or more fast planes. (2) Radio "stratovision" relay between aircraft based on suitably spaced carriers. (3) Radio relay chain via Labrador, Greenland, Iceland and the Faeroes. (4) Submarine cable with transistor repeaters. (5) Radio "scatter transmission" (see "Wireless World," p. 273, July, 1952). (6) Miscellaneous marginal proposals, including moon reflection of radio signals.

12kV

with a rectifier only 10·25" long

STANDARD engineers have achieved considerable progress in miniaturisation with their high voltage SenTerCel Tubular Selenium rectifiers. Take for example Type K3/180; only 10¼" long and $\frac{5}{16}$" in diameter, it will provide a rectified output up to 12 kV at 100 μA across a capacitor of 0.005 μF in a pulse input half-wave arrangement.

Please ask for bulletin F/SRT.11

SELENIUM
SenTerCel
RECTIFIERS

Two ranges of tubular rectifiers are available having rated current outputs of 1mA or 5mA in ambient temperatures up to 55°C. Each range includes stacks capable of withstanding a peak inverse voltage of 68V to 13.6kV per stack with a sinusoidal input. Due to their low cost, they are ideal for use in television receivers and are eminently suitable for all other types of low current E.H.T. supplies.

Standard Telephones and Cables Limited RECTIFIER DIVISION

Registered Office: Connaught House, Aldwych, London, W.C.2.

Warwick Road, Boreham Wood, Herts. *Telephone: Elstree 2401 Telegrams: SenTerCel, Borehamwood*

The Cossor double beam oscillograph, Model 1049, *is used by* **Messrs. C. A. Parsons & Co. Ltd.**, *of Newcastle-on-Tyne, in their Industrial Electronics Laboratory, for checking over operating conditions in the prototype of a newly developed electronic supervising instrument.*

Photo by courtesy of Messrs. C. A. Parsons & Co. Ltd.

In displaying the mutual effect of two related and variable quantities simultaneously the Cossor Double Beam Oscillograph is solving many of the fundamental problems with which the Research and Development scientist is constantly beset. In the Production field, too, there are innumerable problems capable of complete solution by this versatile instrument and every branch of industry is realising the enormous potential of this apparatus in the detection and analysis of faults and the accurate monitoring of manufacturing processes.
The technical advisory staff of the Instrument Division is always at your service to help with your particular problem.

In Models 1035 and 1049 the two traces are presented on a flat screen of 90 mm. diameter and the amplifiers and time base are so calibrated that measurement of the voltage input as well as the time interval between various significant portions of the oscillogram is made possible. Permanent records of these traces for subsequent analysis may conveniently be made by attachment of the Cossor Model 1428 Camera.

Specify
COSSOR
VALVES
AND TUBES

COSSOR

ELECTRONIC INSTRUMENTS

Please address enquiries:
A. C. COSSOR LTD., INSTRUMENT DIVISION (DEPT. 1), HIGHBURY, LONDON, N.5
Telephone: CANonbury 1234 (30 lines)

FURTHER NOTES ON How to Choose a Valve

Grid-Volts/Mutual-Conductance Characteristic Applied to Detectors and Modulators

By THOMAS RODDAM

IN the June, 1951, issue of this journal I discussed the way in which the single valve curve, mutual conductance as a function of grid voltage, could be used to decide which of several similar valve types should be used in an amplifier. The article contained no mention of the effect of local feedback, because it was based on the premise that overall negative feedback would be used in any amplifier that any reader is likely to design, and it did not consider any of the other applications of valves, of which the modulator is the most important. These topics will be discussed in this article.

It may be convenient to recapitulate some of the results derived in the first article, and correct some of the formulæ. We took in equation (1) the anode current I_a as a function of the steady current with no signal applied I_o, the grid voltage e_g and parameters of the valve A, B, C.

$$I_a = I_o + Ae_g + Be_g^2 + Ce_g^3 + \ldots \quad \ldots \quad (1)$$

and

$$\frac{dI_a}{de_g} = A + 2Be_g + 3Ce_g^2 + \ldots \quad (2)$$

Here, then, A is the mutual conductance of the valve, and at any voltage e_g we have

$$g = g_o + 2Be_g + 3Ce_g^2 + \ldots \quad \ldots \quad (3)$$

Differentiating again, $\frac{dg}{de_g} = 2B + 6Ce_g + \ldots$

Referring now to Figs. 1 and 2 in the earlier paper $2B = g/2e$ and thus $B = g/4e$.

The 2nd-harmonic distortion is thus $(g/8g_o)$ 100%. This was incorrectly given as $(g/4g_o)$. 100 per cent. in the previous article. In consequence, when third harmonic distortion is considered we will have more third than second if δ, the deviation from linearity (Fig. 2), is greater than $g/24$. Fig. 1 shows a $g_m - e_g$ characteristic which is a straight line in the working region, so that C and higher terms of e_g vanish: the $I_a - e_g$ curve is then a parabola.

The characteristic shown in Fig. 2 is quite common, especially among the small pentodes. This, in addition to producing second harmonic, which can be calculated by the expression above, also produces third harmonic, at a level $3\delta/g_o$. 100 per cent of the fundamental. For the curve shown this harmonic is phased so that it increases the peaks of the wave, while if the curve is concave downwards the third harmonic is of the right phase to make the peak value less and thus has a squaring effect.

Let us now consider what happens when we leave the cathode bias resistor of the valve unbypassed, so that there is a certain amount of negative feedback in the stage. The most useful characteristic will be a graph of mutal conductance against grid-earh voltage, which is what we should measure if to cathode resistor were built into the bulb. We des in fact, measure just this quantity on old valve which have built up a barrier layer at the cathod surface.

The effect of the bias resistor is to make $e_g = e_o - I_aR_k$ and we can rearrange this equation as:

$$(e_o - e_g) = R_kI_a$$

Differentiating, we have

$$\frac{de_o}{dI_a} - \frac{de_g}{dI_a} = R_k \quad \text{or} \quad \frac{de_o}{dI_a} = \frac{de_g}{dI_a} + R_k$$

Now $\frac{de_o}{dI_a}$ is just the reciprocal of the mutual conductance with the cathode resistor in circuit, g_k, so that $\frac{1}{g_k} = \frac{1}{g_m} + R_k$

For any particular grid-cathode voltage, therefore, we obtain the effective mutual conductance by adding the cathode resistance to the reciprocal of the valve mutual conductance. In Fig. 3 this has been done, using a cathode resistance of $1/g_o$ where g_o is the mutual conductance at the working point. This is a fairly common value, and corresponds to 6 db of feedback. It will immediately be observed that the value of g is



Fig. 1. The simplest type of valve g_m-e_g characteristic has a relatively long linear section.



Fig. 2. A curved g_m-e_g characteristic causes third-order products proportional to the "sag," δ.

halved for small grid excursions, so that, as we expect, the distortion is halved, but that if the valve is driven at all hard there is a substantial third harmonic component present. For the example shown, indeed, the condition $\delta > g/24$ is rapidly reached, so that there is more third harmonic than second. This third harmonic component is of the phase which tends to square the waveform, a result which will surprise no one who has examined the overload effects in an amplifier with a large amount of negative feedback.

It will not be without interest to notice how, in Fig. 4, a third-order characteristic has been straightened out to almost the straight line we associate with a second-order characteristic. A very careful examination would show the appearance here of higher-order wobbles in the curve, but the accuracy with which we can determine valve characteristics does not justify too critical an examination. The general results can be summarized by saying that a cathode resistor tends to bow the curve upwards, with particularly beneficial effects on characteristics like that of Fig. 2, and at the same time introduces harmonics of higher order.

For some special applications it is desirable to produce a very linear amplifier without using overall negative feedback. It will be clear that by adjusting the stage gains by choice of anode load, and the stage distortion by choice of cathode resistor, a fair amount of distortion balancing can be achieved, since alternate stages tend to balance the second harmonic, and "concave upwards" stages tend to balance the third harmonic from concave downwards stages.

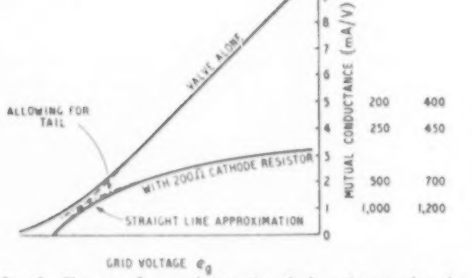

Fig. 3. The use of an unbypassed cathode resistor makes the effective mutual conductance more constant, but adds higher-order terms to the valve characteristic.

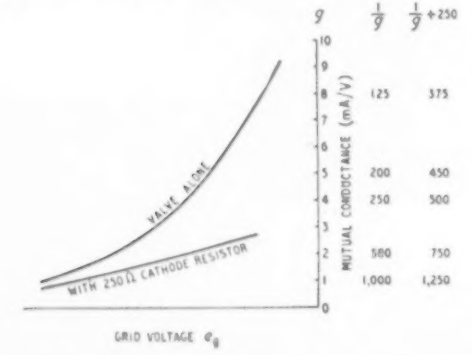

Fig. 4. A curved g_m-e_g characteristic may be straightened by a cathode resistor. This is important in modulator design.

The appearance of the third harmonic when we add negative feedback to the parabolic characteristic, or straight $g_m - e_g$ curve, which alone produces only second harmonic, is easily explained. A single frequency input between grid and cathode produces a second harmonic term at the cathode, owing to the current in the cathode resistor. We now have between grid and earth both fundamental and second harmonic: conversely, with a single frequency input between grid and earth, both fundamental and second harmonic appear between grid and cathode. The valve is not linear, and acts as a modulator, producing terms $2f \pm f$ from the terms f and $2f$ which are present between grid and cathode, and there is your third harmonic.

We must now go on to discuss the choice of a valve for use as a modulator or a detector. If we take the parabolic pentode, with a straight line $g_m - e_g$ characteristic, we have $I_a = I_s + g_m(e \sin \omega t) + \frac{Be^2}{2}(1 - \cos 2\omega t)$ where $2B = dg_m/de_g$. This equation is given at the top of p. 222 of the June 1951 issue. The direct-current component produced in the anode circuit by the application of the signal is thus

$$I_{a'} = \tfrac{1}{4}Be^2.$$

It is not difficult to show that if signals $e_1 \sin \omega_1 t$, $e_2 \sin \omega_2 t \ldots e_n \sin \omega_n t$ are applied simultaneously to the grid, the anode current increment is

$$I_{a'} = \tfrac{1}{4}B(e_1^2 + e_2^2 + \ldots e_n^2)$$

provided that $e_1 + e_2 \ldots e_n$ does not exceed the voltage for which the linear relationship between g_m and e_g holds. The valve thus provides an anode current change proportional to the square of the r.m.s. input, and the anode current meter can be calibrated directly in true r.m.s. volts. The maximum current which can be obtained is $\frac{1}{4}ge$ and this, for a perfect valve having a cut-off at e_c volts and an average mutual conductance of g_o will be 1/16 $g_o e_c$. The standing current, in the absence of any signal, will be $\frac{1}{4}g_o e_c$, so that we cannot have more than 25 per cent rise in anode current.

For a detector, the criterion is clearly a linear $g_m - e_g$ characteristic, and a maximum area under it. If the characteristic is not fully linear, we must compare the area under the linear portion with the area under the whole curve. Fig. 5 shows the two areas to be compared. The waste area, resulting from the tail on the characteristic, increases the standing current which must be balanced out if a meter reading from zero is to be used. The larger this standing current is for a given value of $I_{a'}$ the more difficult it will be to keep the system in the balanced condition. To compare two valves, therefore, we should use the ratio of these areas as an efficiency figure, and choose the valve which gives the best ratio.

An examination of the equation given above shows that the second harmonic current is equal to the rectified current, so that in a frequency doubler the change of anode current when drive is applied is a direct measure of the second harmonic term. For both these cases the use of a cathode resistor may be of assistance if a third harmonic component of the concave upwards type is present.



Fig. 5. The efficiency of a square-law detector depends on the length of the tail of the characteristic.

When the valve is to be used as a modulator, we shall apply a composite signal $e_1 \sin \omega_1 t + e_2 \sin \omega_2 t$ to the grid, giving $I_a = I_o + g_m(e_1 \sin \omega_1 t + e_2 \sin \omega_2 t) + B(e_1 \sin \omega_1 t + e_2 \sin \omega_2 t)^2 = I_o + g_m(e_1 \sin \omega_1 t + e_2 \sin \omega_2 t) + B(e_1^2 \sin^2 \omega_1 t + e_2^2 \sin^2 \omega_2 t) + 2Be_1e_2 \sin \omega_1 t \sin \omega_2 t$.

The first two terms in this expression can be neglected, as they are the standing current and the separately amplified signals. The third term reduces to $\frac{B}{2}(e_1^2 + e_2^2 - [e_1^2 \cos 2\omega_1 t + e_2^2 \cos 2\omega_2 t])$ a direct current term and a term containing the two second harmonics. The fourth term is the important modulation term: $2Be_1e_2 \sin \omega_1 t \sin \omega_2 t$

$= Be_1e_2[\cos \omega_1 - \omega_2 t - \cos \omega_1 + \omega_2 t]$

Each modulation term is therefore of amplitude Be_1e_2. If e_1 is very much larger than e_2 we can take $e_1 = e$ giving $I_{a_2} = \frac{g}{4} e_2$ where I_{a_2} is the anode current component of one sideband. The conversion conductance is $g/4$ which is certainly less than $g_m/8$. The term in the anode current corresponding to the signal e_2 is equal to $g_m e_2$ so that the filter which separates sideband from signal must deal with a signal $4g_m/g$ above the sideband. We must make g/g_m as large as possible. The anode current also contains the carrier term, $g_m e_1 = g_m e$ so that here we must filter out a term $4g_m e/g$ times as large as the wanted sideband.

Since $(e_1 + e_2)$ must not exceed e, we can see how to get maximum output. The sideband output depends on the product e_1e_2, so that a very simple manipulation reveals that maximum sideband output is obtained for $e_1 = e_2 = e/2$. We then have $I_{a_2} = Be^2/4 = ge/16$.

This is the maximum output which we can get from a mixer in a device like a beat-frequency oscillator, which has ample supplies of both oscillator voltages available. Each of the sources will produce an anode current component equal to $g_m e/2$ and a second harmonic term of $ge/16$. This enables us to estimate the filtering which must be provided. When operating in frequency generating equipment it is often desirable to keep the ratio of sideband to a fundamental maximum. In this case we want g/g_m to be as large as possible. Otherwise, for maximum sideband output it is the product ge, the area under the straight part of the curve, which must be large.

A radio-frequency amplifier must not introduce cross-modulation: the modulator analysis is therefore applicable, and since we are only interested in third-order products, or higher odd terms, we see that the coefficient δ is the determining one. The second-order terms $f_1 \pm f_2$ are not important, because they fall far away from the frequency range in use. In theory, then, we need not worry about the value of g, provided δ/g_m is very small. In practice it is advantageous to choose a valve with a small value of g/g_m because any second order terms which reach a later stage will then mix under second-order conditions to provide third-order terms.

I do not propose to consider what happens to modulators with higher-order characteristics, because for almost every purpose the choice lies between using the simple parabolic characteristic, even if a cathode resistor must be added to smooth out a third-order concavity, or using a discontinuous characteristic to provide a high-order term.

Analysis of triode performance is less easily carried out in this simple way, unless the anode load is very small. If the anode load is large, a separate $g_m - e_g$ characteristic must be constructed for each possible anode load. An example is given in Fig. 6, in which the mutual conductance for an anode load of 12,500 ohms is obtained by taking the change of anode current for each 1-volt step. Travelling down the load line from $E_g = 0$ to $E_g = -1$ gives a change of 2.3 mA in the anode current, which is plotted as a mutual conductance of 2.3 mA/volt at $Eg = -0.5$. This is actually a synthetic example, which is why the excellent linearity of the $g_m - e_g$ characteristic is observed. Any triode can be studied quite critically by plotting a set of these $g_m - e_g$ characteristics with different values of anode load. The effect of cathode-resistor feedback can be analysed either by plotting the modified plate characteristics or, perhaps more easily, by operating on the $g_m - e_g$ characteristics.

This survey of the use of a single valve curve is by no means comprehensive: to make it so we should need to consider high-order terms and carry out much more complete mathematical analyses. And then we should be faced by the problem of obtaining sufficiently accurate experimental data to insert in our formulæ. The only way in which such data could be obtained would be by measurement of the high-order products in the anode current, which we could then use, in the long run, to calculate these products. All we need in practice is a knowledge of the slope and sag, g and δ, and a knowledge of how these are affected by cathode-resistor feedback. We are then in a position to understand what is happening in any particular case.

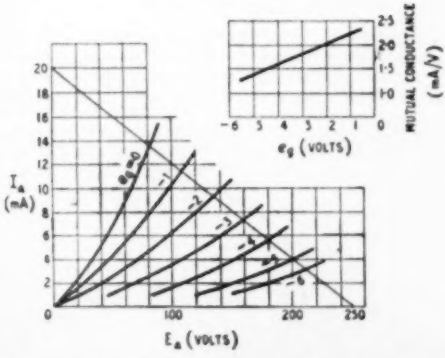

Fig. 6. For a triode it is necessary to fix the load line before plotting the g_m-e_g characteristic. This typical example shows a linear g_m-e_g characteristic for $R_L = 12,500$ ohms.

L/C RATIO

How Does it Affect Sharpness of Resonance?

By "CATHODE RAY"

ONE of the most familiar facts in all radio is that to tune a circuit to a certain frequency (or wavelength) you have to choose or adjust its inductance (L) and its capacitance (C) so that $LC = 1/(2\pi f_r)^2$. This formula comes in various versions, depending on which units are used and whether reckoned in terms of frequency or wavelength; but they all amount to the same thing. The quantity that decides the resonance frequency is neither L nor C alone but their product—the result of multiplying them together. And just as an acre of ground can be long and narrow or short and wide, a given frequency can be tuned to by using a lot of inductance and little capacitance, or vice versa. In other words, frequency (or wavelength) concerns only LC; in choosing the separate values of L and C the question of L/C ratio arises. If LC decides frequency, what does L/C decide?

This matter seems to be very much less generally understood than the first. Some readers have written to say that information they have on it is contradictory. In the design of stable-frequency oscillators for transmitters or signal generators, for example, some authorities recommend a high L/C ratio and others a low. It seems that both contentions can be proved.

Well, anybody who has read the discussion of oscillator circuits in the August issue may have noticed at least one possible source of such confusion. The types of stable-frequency circuits we discussed then could be regarded as either high or low L/C, according to one's point of view. But as you will probably not want me to seek refuge in a Joadian evasion, or merely refer back to the article, I will try to make the matter clear from the beginning.

Medium-Wave Tuning Circuit

You probably know already that a high L/C circuit is one having a higher impedance than a low L/C circuit; but so as not to take this too much for granted let us consider some actual figures. Take an ordinary medium-wave tuning circuit. A usual inductance for a capacitance-tuned circuit is 160μH, and employing any version of the tuning formula (or, to save time, any of the special abacs or nomograms or slide rules devised for the purpose) we find that the C required to tune it to 1 Mc/s (300 metres) is 158pF. L/C in these units is therefore 160/158 or just over 1. This could be called a medium L/C circuit. In absolute units (henries and farads) it is just over 1 million, so for convenience let's stick to μH and pF (or alternatively H and μF.)

If by taking out all the capacitance possible, leaving only stray, we managed to reduce C to 15.8pF—one tenth of the original figure—we would have to increase the inductance in the inverse proportion—ten times—making it 1,600μH to keep the resonance frequency the same. Although LC is as before, tuning to 1 Mc/s, L/C is 1,600/15.8 or just over 100; that is to say, 10^2 times as much as before. This would be a decidedly high L/C circuit. At the other extreme one could tune to the same frequency with a circuit consisting of 16μH and 1,580pF, its L/C being only about 0.01.

The condition for resonance, as we know, is that capacitive and inductive reactances are equal in magnitude. They are always opposite in sign, so at resonance they cancel out, leaving resistance as the only net impedance of the combination. But whereas all three of the pairs of reactances just specified cancel out at a frequency of 1 Mc/s, the reactances of the pairs are of course widely different. At 1 Mc/s 160μH and 158pF are both 1,000Ω; 1,600μH and 15.8pF are 10,000Ω; and 16μH and 1,580pF are 100Ω. Remembering the L/C figures in each case, we see that X is proportional to the square root of L/C. In fact, if we use absolute units we can go further and say that X is *equal* to $\sqrt{L/C}$. This is quite easy to prove. X_L, the inductive reactance $= 2\pi fL$; and X_C, the capacitive reactance $= 1/2\pi fC$. So $L = X_L/2\pi f$ and $C = 1/2\pi f X_C$. So $L/C = X_L X_C$, and as at resonance $X_L = X_C$ (call them both X) we have $L/C = X^2$ or $X = \sqrt{L/C}$.

Anybody who knows about the characteristic impedance (Z_0) of transmission lines will remember that this also $= \sqrt{L/C}$, if L and C are the inductance and capacitance of a sample of the line. This suggests impedance matching. But it may not be a very helpful suggestion to follow up, because with transmission lines one uses impedance matching with the object of obtaining a non-resonant condition, which is hardly what we're after just now. In any case, one doesn't have to know anything about transmission-line theory to see that a high L/C circuit is a high-impedance circuit, and vice versa. At a given power level, a high L/C circuit has more voltage and less current than a low L/C circuit.

But how about the practical implications of all this? What are the most important characteristics of tuned circuits, apart from frequency?

Chiefly three, I think. In those used for oscillators, frequency stability; and in those used for receiving, selectivity and voltage magnification. The first was disposed of in the August issue but as it involved one of the apparent contradictions perhaps I had better recapitulate slightly.

The frequency is determined by LC, and this is provided by an inductor and a capacitor, which are designed so that their L and C are as little affected as possible by such things as temperature, vibration, and general wear and tear. To exclude any variations due to things near them, they can be enclosed in a firmly fixed screen. But oscillations cannot be kept going in them without some connection with the outer world, usually a valve. The thing is to see that this connection doesn't ruin all the care bestowed on the tuning circuit, by introducing varying capacitance or inductance.



Fig. 1. When the external connections are tapped across only part of the tuned circuit, there may be difference of opinion about how the L/C ratio is reckoned.

There is bound to be some resistance associated with L and C, but the less there is the easier it is to keep oscillation going and the less the coupling need be to the maintaining valve. So, as we saw in the August article, the first rule is to have the least possible series resistance in relation to reactance ; and since the ratio of reactance to resistance is commonly called Q this rule means making Q as large as possible.

Deciding the Ratio

Next we come to the L/C ratio. If this is large, C is small, so any extra capacitance brought in by the valve connection has a relatively large effect. On the other hand, if L/C is small the effect of stray inductance is accentuated. On the whole it is easier to deal with stray inductance than stray capacitance, so it is a good general rule to make L/C fairly low. If the valve system had to be connected across the whole tuned circuit, the best L/C ratio would probably be the lowest that would allow the valve to oscillate at all ; but this might lead to practical difficulties with the capacitor. For constancy, low resistance, and ability to vary C, air is the best dielectric ; but a variable air capacitor of much more than 500pF, or 1,000pF at most, is not usually very convenient. So for most purposes one uses a medium L/C and taps the valve across as little of the tuned circuit as possible, as in Fig. 1. The part of the tuned circuit across which it is not tapped then includes both inductance and capacitance, and may even include most of them that there is ; so much so that it looks to some people like a series-tuned circuit. If so, they may be surprised to see that the supposed L/C ratio in a very constant-frequency oscillator is extremely high. A typical quartz crystal for 1 Mc/s might have L = 840,000μH and C = 0.03pF, making L/C = 28,200,000 compared with 1 for a typical receiver circuit ! But if you regard the tuned circuit as the one that is in resonance, you will think of Fig. 1 as a parallel-tuned circuit, L in the formula being the portion of inductance across which the valve is connected and C the rest of the inductance in series with the tuning capacitance. The latter combination must work sufficiently off resonance to make its net reactance equal to the right C to tune L. Since L is very small, this C equivalent must be quite large, and the L/C ratio (in this view) is small. In the crystal-controlled and so-called Clapp circuits, the valve is tapped down on the capacitance side, and again the parallel L/C ratio is small, although the L/C of the series portion by itself (especially if it consists of a crystal) is extremely large. You see now how easy it is to get at cross purposes about L/C ratio !

But since this matter of oscillator circuits was gone into at length in the August issue, the main subject this time ought to be selector circuits, such as one uses in receivers. The need to avoid undesired detuning applies to these also, of course ; but there is the additional need to obtain a desired standard of selectivity. And about this too there is sometimes confusion of thought.

Here is one argument I have heard about our parallel LC tuning circuit. Since L and C are in parallel, it is appropriate to represent them by a susceptance sketch, as explained three months ago. (Susceptance, you remember, is 1/X.) Adding together the separate susceptances of L and C gives the susceptance of their parallel combination. If the L/C ratio is large, the reactances are large and the susceptances therefore small, which is represented in the sketch, Fig. 2(a), by drawing the curves close to the frequency axis. A lower L/C circuit is represented by the steeper curves in Fig. 2(b). In both cases the susceptance at f_r, the resonance frequency, is zero ; which means that the reactance is infinitely large, so provides no path for current. So far everything is perfectly sound. But the argument then runs off the rails by saying that because the curves show that the susceptance of a low L/C circuit changes more steeply with frequency than that of the high L/C circuit, the low L/C circuit must have a sharper resonance peak. That is to say, the lower L/C the greater the selectivity. Every parallel LC circuit is also, from another point of view, a series LC circuit ; and if one were to sketch the *reactance* curves for the same circuit from the series point of view, and use the same argument, one would arrive at the conclusion that to sharpen the resonance peak one should *increase* L/C ! Now a sharp series and a sharp parallel resonance go together, so clearly there is something wrong with the argument.

You have probably spotted it already. It is forgetting that a reactance or susceptance sketch, useful though it is when treated intelligently, is only part of the whole picture. When considering selectivity the missing part, which is resistance, just mustn't be ignored. As I explained in the July issue, a reactance sketch is just a plan view of a three-dimensional curve, which stands above the paper at a distance representing the resistance of the circuit ; a susceptance sketch similarly fails to show its third dimension —conductance. At frequencies far from resonance the resistance (or conductance) of any reasonably

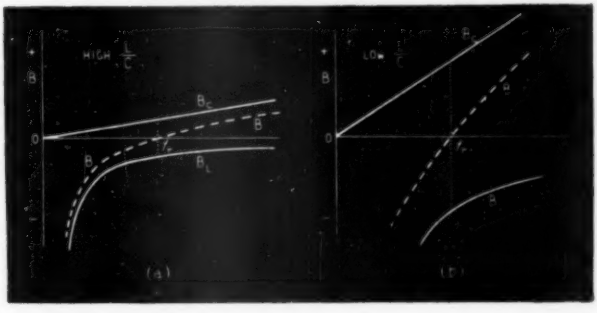

Fig. 2. Susceptance sketches for (a) high-L/C and (b) low-L/C tuned circuits. Which would one say was the more selective?

low-loss tuning circuit is so much smaller than the reactance (or susceptance) as to be unimportant; but at resonance, where reactance (or susceptance) is zero, resistance (or conductance) is all-important. If the X curve of a series circuit, for example, stood high off the paper, meaning that the resistance was large, the impedance (represented by the distance from the curve to the f axis) would change quite slowly with frequency, regardless of what X was doing.

Effect on Selectivity

Again, attempts are sometimes made to demonstrate the influence of L/C ratio on selectivity by quoting various formulae. And again it is very easy to arrive at conflicting conclusions. It is advisable, to say the least, to begin by agreeing on what is meant by selectivity. Part of the confusion, I suspect, is due to not doing this. If one is using coupled tuned circuits, the question is complicated by the degree of coupling; but just now we are considering selectivity in terms of the simple tuned circuit, in which the variables are L, C, R, and f. The proportions and position of the resonance curve can be varied, but not its basic shape. So all that one needs to know is the width of the resonance curve at an agreed distance down its slopes. Calculation is simplified if it is agreed to measure the width where the power due to a given series input voltage is reduced to half of what it is at resonance. This level is 3db down, and is the same as 70.7% ($= 1/\sqrt{2}$) of peak voltage or current, as in Fig. 3. Curves for any number of tuned circuits in successive stages of amplification (provided that there is negligible direct coupling between the circuits) can be derived by adding their individual db levels relative to peak.

Even when all this has been agreed, there are still two different ways of reckoning the width. Which to use depends on what the tuning is wanted for. Since the vertical dimension—the response—is reckoned relative to the response at resonance, the natural thing is to reckon width in frequency relative to the frequency at resonance. In Fig. 3 this would be $(f_2-f_1)/f_r$. Since this represents bluntness of resonance, sharpness of resonance would naturally be $f_r/(f_2-f_1)$. Its relationship to the circuit is delightfully simple; it depends on Q and on nothing else—$f_r/(f_2-f_1) = Q$. So this way of reckoning selectivity by sharpness of resonance ties up very nicely with sensitivity, or circuit magnification, which is also equal to Q (subject to the reservations I mentioned in the July, 1949, issue).

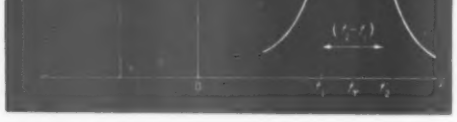

Fig. 3. Standard method of reckoning sharpness of resonance.



Fig. 4. Typical environment of a tuned circuit, loaded by a diode detector, which is equivalent to a certain resistance.

And for some exceptional purposes it is the natural thing to want. But not in receivers. Receivers are normally required to accept a specified frequency band and keep out all else. This bandwidth is decided by the modulation, and the carrier frequency doesn't come into it at all. Assuming that voice frequencies up to 5kc/s are wanted, and a double-sideband a.m. system is in use, the requirement is an acceptance band of 10kc/s, regardless of whether it is centred on Droitwich ($f_r = 200$kc/s) or London Home Service ($f_r = 908$kc/s) or London television sound ($f_r = 41{,}500$kc/s). So for purposes of receiver design the appropriate way to reckon sharpness of resonance is simply $1/(f_2-f_1)$, which is the reciprocal of bandwidth at the half-power level. Rearranging the "natural" formula accordingly, it is equal to Q/f_r.

Confusion over Q

Now if two people are arguing about tuning circuits, and one takes for granted the natural definition of sharpness of resonance, which makes it equal to Q, and the other, more practically minded, reckons it is Q/f_r, or more probably one of its equivalents that doesn't reveal the discrepancy so plainly, it is not surprising if they get at loggerheads.

It is these equivalents that usually cause the muddle, because there are quite a lot of them. Let us start from Q/f_r. Q itself contains f_r, because it is X_r/r, where X_r is the reactance of either L or C at resonance, and r is the resistance which, placed in series with L and C, would cause as much power loss as actually takes place. Since $X_r = 2\pi f_r L$, then $Q = 2\pi f_r L/r$, and $Q f_r = 2\pi L/r$. Of this, 2π is just a simple constant, so for comparative purposes could be left off, giving a measure of sharpness in units 6.28 times bigger. (The larger the units used for specifying a measurement the smaller the number of those units. A distance equal to 3 in inches is only 0.25 in feet.)

The rearrangement just made brings L into the picture; can C be made to appear at the same time? Yes, it can. $X_r = X_L = X_C = \sqrt{X_L X_C}$; and substituting the full details of X_L and X_C we get $\sqrt{L/C}$, which is just what we have been looking for. So our sharpness of resonance, Q/f_r (let us call it S for short) is equal to $\frac{1}{f_r r}\sqrt{\frac{L}{C}}$. In other words, it looks as if it is proportional to the square root of the L/C ratio, and a high L/C ratio should be chosen for getting high selectivity.

But alas! If we approach the same point from a different direction, using a parallel resistance R to represent the cause of all power loss in the circuit (as it is quite legitimate to do) the appropriate expression for Q is R/X, and S is therefore $R/f_r X$. Perform-

ng exactly the same operation on X as before we get the result $S = \frac{R}{f_r}\sqrt{\frac{C}{L}}$, which makes it look as if what one must do to obtain sharp tuning is aim for *low* L/C. So even starting from the same definition of sharpness, there seems to be no guarantee of results that make sense! Which of these apparently contradictory instructions is one to accept?

Well, of course, the contradiction is only apparent. The mistake is in assuming that r or R will remain calmly constant while we are playing about with L/C. In practice nearly all the power loss is associated with the coil. So when, following the first equation, we increase L, the series resistance goes up too, and in doing so more or less neutralizes the advantage of the higher L/C ratio. Or if we choose the second equation and reduce L, R falls too, and again works contrariwise. So in spite of appearances the two equations actually come to precisely the same thing.

It is nearly closing time and we seem to be as far away as ever from an answer to the question, how does L/C ratio affect sharpness of resonance? Not to keep anyone in suspense any longer, I will give my answer for what it is worth, which is that any effect of the L/C ratio on sharpness of tuning is purely coincidental. There is no simple proof of this. S, you remember = Q/f_r. Now f_r doesn't involve L/C; as we said at the start, f_r depends only on LC, and L/C can be varied quite independently. So, with either method of reckoning sharpness of resonance, all depends on Q. The Q of any normal tuned circuit really means the Q of the coil, for the capacitor losses ought to be negligible in comparison. How does Q vary with L? Since $Q = 2\pi f_r L/r$, it might seem that it is directly proportional to L; but we are not likely to be caught by that one again. What does r do?

That is really the crux of the whole matter, and the difficult thing to prove, because r, the quantity that represents the cause of the total coil losses, depends on dozens of things—every dimension of the coil, every material used in its construction, the number of turns, their gauge and spacing, and so on. This subject has been investigated for many years, and a fairly recent specialist book on it (Dr. V. G. Welsby's "Theory and Design of Inductance Coils") confirms that if you vary only the inductance of a given type of coil—by varying the number and gauge of turns but keeping everything else as much as possible the same—it makes no difference to Q. In practice, Q might be a little more or a little less, depending on the precise details of construction; hence my conclusion that any effect on sharpness of resonance of varying the L/C ratio is purely coincidental.

Just to make sure there is no misunderstanding, however, I must point out that this conclusion takes no account of special circumstances—in particular any external loading of the tuned circuit. Suppose this loading takes the form of a resistance in parallel, as in Fig. 4 where the voltage developed across the tuned circuit is applied to a diode detector, which might be equivalent to a resistance of, say, 100kΩ. Suppose the tuned circuit is our medium-L/C 1-Mc/s example, with its X_r of 1kΩ. If its Q were 100, then its equivalent parallel resistance R ("dynamic resistance") at resonance, = QX_r, would be 100kΩ; and the 100-kΩ loading across it would reduce the net parallel resistance to 50kΩ and the overall Q would be 50. Substituting the high-L/C circuit, with its 10-kΩ reactance, we would have an unloaded dynamic resistance of 100 × 10 = 1,000kΩ; and obviously this would be far more heavily loaded by the 100-kΩ detector. The resistance of circuit and load in parallel would be 91kΩ, and with X_r = 10kΩ the overall Q would be 91/10 = only 9.1. The low-L/C circuit would be less heavily loaded, the overall Q being 91. Here they all are in a table, with reactances and resistances in kΩ:



Fig. 5. In the favoured method of reckoning L/C ratio, L is the part across which the load resistance or other external circuit is connected; in this case L_B. If the load is tapped on the C side, the same principle applies there.

L/C (μH/pF)	X_r	R	R′	Q′
1	1	100	50	50
100	10	1,000	91	9.1
0.01	0.1	10	9.1	91

X_r = reactance of L (or C) at the resonance frequency, 1 Mc/s
R = dynamic resistance of tuned circuit alone = QX_r
Q = Q of tuned circuit alone = 100
R′ = dynamic resistance of tuned circuit in parallel with 100-kΩ load.
Q′ = Q of tuned circuit loaded by 100kΩ in parallel = R'/X_r

Similarly it can be shown that a load resistance in *series* with the tuned circuit is related in the opposite way, reducing the Q and hence the sharpness of resonance more when L/C is low than when it is high. In practice a tuned circuit is almost sure to be loaded somehow or other if it is to be of any use, so choice of L/C ratio is really bound up with that. Most often, tuned circuits are loaded in parallel. So if one is aiming at high selectivity, in combination with high frequency stability, the choice will be low L/C; it being understood that this ratio is reckoned on a parallel basis. For example, in Fig. 5, L would not be the whole coil, but only the part L_B across which the load is connected; and C would not be just what is marked C, but the net reactance of C and L_A at the working frequency. It could be reckoned most easily as the capacitance needed to tune L_B to resonance.

From this it might seem that there is no limit to the desirability of low L/C. But of course there is, because although a given *voltage* injected in series with a tuned circuit of a given Q is magnified to the same extent however low L/C may be, one is generally given a limited *power*, and the maximum output is obtained when impedances are properly matched. We found, earlier on, that $Q = R\sqrt{C/L}$, so $R = Q\sqrt{L/C}$, and if Q is more or less constant it is clear that R, the dynamic resistance, can be adjusted by L/C. Choice of L/C ratio, then, has to be a compromise between the often conflicting requirements of sensitivity, selectivity, and frequency stability, and depends on how power is brought in and taken out. So although I hope I have managed to make the matter clearer, you see that there is no simple golden rule covering all situations, enabling one to dodge all the hard work. Life is like that.

WORLD OF WIRELESS

Speaker Tax Clarified • A.M./F.M. Schedule • N. American News

P.T. on Loudspeakers

AMPLIFICATION of the order imposing Purchase Tax of 66⅔ per cent on loudspeakers (see p. 362 of last issue) has been issued by the Customs and Excise Office as a result of consultations with the radio industry. Incidentally, there have been strong criticisms of the imposition of this tax without prior consultation with the industry.

The announcement states that "loudspeakers of other than the cone type, e.g., pressure units, are not chargeable with Purchase Tax. . . . All separately supplied cone-type loudspeakers (whether mounted or not) of sizes up to and including twelve inches nominal diameter are subject to the tax, regardless of the purpose for which they are supplied."

The tax does not apply to loudspeakers supplied as parts of a complete public-address or communication system. The liability to tax of replacement or additional loudspeakers for such installations will be determined in accordance with the decision quoted above.

It is pointed out that a loudspeaker, of whatever type or size, incorporated in a broadcast receiver is chargeable with tax as part of the complete set.

Wrotham Schedule

SLIGHT changes were recently made in the schedule of experimental transmissions from the B.B.C's a.m./f.m. station at Wrotham in order to permit the inclusion of the Promenade Concerts. From 1st October, however, the following schedule will be used for the transmissions which are radiated simultaneously on 91.4 Mc/s (f.m.) and 93.8 Mc/s (a.m.).

11.0-noon 1.0-2.0 2.30-4.30	Mon.-Thurs., Light Programme.
6.0-close down	Sun., Mon., Tues., and Thurs., Third Programme. Wed. and Sat., Home Service.

It is emphasized by the B.B.C. that the transmissions are experimental and times may therefore be varied.

Brit. I.R.E. Premiums

THE premier award of the Brit. I.R.E.—the Clerk Maxwell Premium (20 gns) for the most outstanding paper published in the Institution's *Journal* during the year—will be presented at the Annual General Meeting to Dr. H. Paul Williams (formerly with Cossors and now with Fairey Aviation Co.) for his paper "Subterranean Communication by Electric Waves."

The recipients of other awards and the titles of the papers for which they are made are: Heinrich Hertz Premium (20 gns) to R. E. Spencer (E.M.I. Engineering Development) for "The Detection of Pulse Signals Near the Noise Threshold"; Louis Sterling Premium (15 gns) to Emlyn Jones (Mullard Research Laboratory) for "Scanning and E.H.T. Circuits for Wide-Angle Picture Tubes"; Leslie McMichael Premium (10 gns) to R. G. Kitchenn (Postmaster-General's Dept., Australia) for "An 8-Channel Transmitter for an Experimental Carrier Wire-Broadcasting System"; Brabazon Premium (15 gns) to G. E. Roberts (Decca Navigator) for "The Design and Development of the Decca Flight Log"; and Marconi Premium (10 gns) to E. G. Rowe (S.T.C., Brimar Valve Division) for "The Technique of Trustworthy Valves." The Dr. Norman Partridge Memorial Award and the 1951 Students' Premium have not been awarded. Graduateship Examination prizes have been awarded to G. R. Beswick (Birmetals, Ltd.) and C. J. White (B.B.C., Daventry).

Show News

ALTHOUGH the attendance at Earls Court did not reach the record of the first post-war show at Olympia (443,433), the final figure of 289,899 was some 57,000 in excess of last year's total.

It is understood that the Radio Industry Council proposes to hold next year's National Radio Exhibition—the twentieth—at Earls Court on approximately the same dates as this year—early September.

British P.A. in Canada

THE responsibility of designing and installing a new speech reinforcement system for the Canadian House of Commons in Ottawa has been entrusted to Tannoy Products, whose experience in equipping both Houses of Parliament in this country, and the Indian Legislative Assembly, New Delhi, must be unique.

The basic principle of dividing the House into zones, each equipped with a directional microphone and the automatic muting of adjacent low-level reinforcing loudspeakers by a relay system, has been adopted, and the installation calls for no fewer than 23 microphones and 550 loudspeaker units, the latter being installed between the double desks. A well-thought-out system of control and monitoring is under the hands of a strategically placed operator.

Initial installation and operation of the equipment will be carried out by Tannoy technicians; subsequent operation and maintenance will be undertaken by Cossor (Canada), Ltd.

N. American Convention

A RECIPROCAL radio convention between Canada and the United States, which came into effect on August 12th, permits the operation of radio equipment by citizens of one country when in the other.

It is no longer necessary for operators of business-radio gear, or those with mobile radio-telephones for linking with the public telephone service, to cease using their equipment after crossing the frontier. Holders of amateur radio licences may also operate their equipment in their cars over the border or when temporarily in the neighbouring country. Licences for air radio operators are also valid in both countries.

ADMIRAL DORLING, R.I.C. Director, addressing the gathering at Earls Court when J. R Acton (right) was presented with the first R.I.C. Technical Writing Premium by A. R. W. Low, Parliamentary Secretary to the Ministry of Supply (left) for his article "The Single-Pulse Dekatron" published in "Electronic Engineering."

PERSONALITIES

Lord Hankey has retired from the chairmanship of the Technical Personnel Committee of the Ministry of Labour and National Service. In 1940, when Chancellor of the Duchy of Lancaster, he became responsible for the supply of radar and radio personnel and in 1941 he was appointed chairman of the Technical Personnel Committee, which was given the task of organizing the scientific man-power of the country. In October last year the committee was reconstituted with wider terms of reference than in wartime and Lord Hankey consented to be chairman during the initial stages of its works. He is succeeded by Sir George Gayter.

Sir Edward Appleton, F.R.S., has been nominated president of the British Association for the Advancement of Science for 1953. This was announced at the annual assembly of the Association in Belfast. Next year's annual meeting will be held in Liverpool. Sir Edward, who has been Principal and Vice-Chancellor of Edinburgh University for the past four years, was for the previous ten years administrative head of D.S.I.R.

L. H. Bedford, O.B.E., M.A. (Cantab.), B.Sc., is among five past students of the City & Guilds College who have had the Fellowship of the City & Guilds of London Institute conferred upon them "in recognition of their distinguished services and outstanding contributions to the advancement of the industry in which they are engaged." He started his career with Standard Telephones & Cables and in 1931 joined A. C. Cossor, Ltd., where he was closely associated with the development of radar. In 1947 he joined Marconi's, where he is chief television engineer.

H. W. Bowen, O.B.E., who from 1946 until recently was managing director of E.M.I. Factories, Ltd., has become managing director of Britannic Electric Cable & Construction Company—one of the two operating subsidiary companies of Radio & Television Trust, Ltd. The other operating company is Airmec Laboratories, Ltd.

T. E. Goldup, M.I.E.E., who, as announced last month, has been elected a vice-president of the I.E.E., succeeds Professor Willis Jackson as chairman of the Board of Governors of the Ministry of Supply's School of Electronics at Malvern, Worcs, of which he has been a governor since 1949. He is also a governor of the Wandsworth Technical College and a member of the advisory committee of the Norwood Technical College. Mr. Goldup is a director of Mullard, Ltd., which he joined in 1923.

T. R. B. Sanders, C.B., who during his seven years in the Ministry of Supply (where he held a number of key posts) was concerned with the technical development of a wide range of Service equipment, has been appointed engineering adviser to the British Standards Institution.

J. Foster Veevers, M.I.E.E., has been appointed general manager of Plessey's Swindon Works, where, in addition to the large-scale production of repetition parts, electrolytic capacitors, volume controls and other radio components are manufactured. Prior to joining the Plessey Company, he was with the General Electric Co. as manager of the Stockport works of Salford Electrical Instruments, Ltd.

Major H. MacCallum, B.Sc., first Marconiphone manager, was presented with a television set by the company during the Earls Court Show. He was responsible for the production of the first valve receivers made by Marconiphone and was associated with the arrangements for the first broadcast from 2LO London.

IN BRIEF

Licence Figures.—At the end of July the number of broadcast receiving licences in the U.K. had reached 12,777,690, including 1,564,254 for television and 151,765 for car receivers. During the month television licences increased by 25,703.

COMPARISONS. At the presentation to Major MacCallum (right) comparisons were drawn between the price of the first Marconiphone "Ideal Home" loudspeaker sets—which had four valves, 25 components and 20 soldered joints—and a 14-valve (+ c.r.t.) television receiver, with over 200 components and some 500 soldered joints. The 1922 set cost £51 18s 0d (no P.T.), while the Marconiphone VT59DA television set costs £49 15s 0d (plus £22 13s 2d P.T.)

OUR AUTHORS

Peter J. Baxandall, the author of the article "Negative-Feedback Tone Control" in this issue, is a senior scientific officer in the Physics Department at T.R.E. Until 1944, when he went to Malvern, he was at Cardiff Technical College training Fleet Air Arm radio mechanics. He was previously a student at the College, where in 1942 he obtained his external London B.Sc.(Eng.) degree with second-class honours. He worked for a short while at T.R.E. with Prof. F. C. Williams. His interest in sound reproduction is purely as a hobby and the circuit arrangement of the tone control described in this issue was awarded the *Wireless World* Prize by the judges of the Amateur Competition at the B.S.R.A.

G. F. Johnson, author of the article "Television A.G.C. Circuit," graduated B.Sc. (Hons.) from Reading University in 1944, where radio was then treated as a complete subject and not merely a branch of physics. For the following two years he served in the Projectile Development Establishment of the Ministry of Supply. Since January, 1947, he has been at the Armament Research Establishment (M.o.S.), where he is an experimental officer. G. F. is a brother of K. C. Johnson, contributor of the articles on single-valve frequency-modulated oscillators in our April and May, 1949, issues.

E. A. R. Peddle, author of "Electronic Switching" (p. 421), graduated from University College, Exeter, in physics in 1947 and, after two years in the R.A.F. as an education officer, joined the G.E.C. Research Laboratories in 1950 as a member of the pulse communications group.

Canada's Television Service opened on September 6th with transmissions from the Montreal station. Two days later the Toronto transmitter came on the air. The studio equipment for both stations and also an outside broadcasting van for each was supplied by Marconi's.

E.M.I. "Long Play" Records.—It is announced that 45-r.p.m. 7in, as well as 33⅓-r.p.m. 10in and 12in records will be released this month by H.M.V., Columbia, Parlophone and M.G.M. The groove pitch will be of the order of 250 per inch and the base will be a new British plastic giving high mechanical strength and low surface noise.

Large-screen (4 × 3ft) monitor receivers were installed on each side of the stage in the Earls Court studio to enable members of the audience to see the transmitted picture in addition to the complicated set-up on the stage. The equipment was installed at the request of the B.B.C. by Aren (Radio & Television), Ltd., of Guildford, Surrey.

Marconi's have lent four transmitter-receivers to the British North Greenland Expedition which recently left London on a 26-month investigation. The sets, which operate on two "spot" frequencies in the 2.5-8.5 Mc/s band with a power of two watts, will be used for inter-communication when parties are working considerable distances apart. These sets have already undergone tests in the Malayan jungle.

British Display at the German Industries Fair in Berlin, which opened on September 19th, includes demonstrations by Pye of colour and underwater television. Also included in the British Pavilion, where the B.B.C. has an information bureau, is a display of Decca radar gear.

Radio-controlled boats and aircraft will again be a feature of the *Model Engineer* Exhibition which will be opened by the Duke of Edinburgh at the New Royal Horticultural Hall, Westminster, on October 20th.

"**Elettra II**," Marconi's research yacht, which is visiting Greenock (October 7th-18th), Belfast (October 21st-29th) and Dublin (October 29th-November 6th), has on board three new products for test and demonstration. These are the "Albatross" radio-telephone transmitter-receiver and two echometers, the "Graphette" recording sounder (140 fathoms max.) and "Viaette" visual sounder (130 fathoms max.).

Dollar Exports.—B.T.H. has received from the U.S. Army, European Headquarters Command, an order for military electronic equipment valued at over £1,500,000.

Ambiguity.—Since the advertisement pages went to press it has been pointed out by A. R. Sugden & Co. that their announcement on p. 32 is ambiguous. The price quoted for the 3-speed motor does not include the pick-up.

Phone number of Radio Traders, Ltd., was incorrectly given in their advertisement on p. 18 of our September issue; it should be Gerrard 3977/8.

EDUCATIONAL

Technological Education. — Among the 200 or so advanced courses listed in the Bulletin of Special Courses in Higher Technology issued by the London and Home Counties Regional Advisory Council for Higher Technological Education are a number which may be of interest to *Wireless World* readers. They include acoustics, industrial electronics, high-vacuum technique, pulse techniques, radar principles, technical writing, television and valve technology. Thirty colleges are listed in the Bulletin which is obtainable, price 1s 6d, from the Secretary, Regional Advisory Council, Tavistock House South, Tavistock Square, London, W.C.1.

Intensive Courses in electronics and electrical engineering are provided by the South-East London Technical College. These full-time courses are divided into two sections; the first for students with little or no knowledge of electronics and the second for those who have completed Stage I or have some previous knowledge of the subject. The next Stage II Course, for which the fee is £6 13s 4d, will be held from October 6th to November 28th. The college is also providing an evening course in communication networks by Dr. W. Saraga. The fee for the course of twenty-four lectures, to be given on Fridays from October 24th, is £1. Details of each of these courses are obtainable from C. W. Robson, Head of the Electrical Engineering Dept. of the College, Lewisham Way, London, S.E.4.

Prospectus for the 1952-53 session of the School of Engineering, Burnbank, Hamilton, Lanarkshire, includes details of both full-time and part-time day and evening courses in radio and television servicing, audio engineering, telecommunications, industrial electronics and basic radio and television principles. A series of six lectures on colour television covering both the fundamentals and the present state of the art is also scheduled. Details are available from R. H. Garner, the principal.

Secretaries who have not yet sent in details for our Club Directory, as requested in our last issue, are asked to do so by return otherwise it will not be possible for their entries to be included.

Amateur Exam. Courses.—Although the courses for the Radio Amateurs' Examination, arranged by the principals of the Brentford (Middx.) and Chichester (Sussex) Evening Institutes, will have begun by the time this note appears, students will still be accepted. At Chichester, where E. J. Pearcey (G2JU), late of the E.M.I. Group, is instructor, classes are held on Wednesdays at 6.30 at the Lancastrian Boys' School, Orchard Street, Chichester. At Brentford the classes are held at 7.0 on Wednesdays and the instructor is J. R. Hamilton of E.M.I.

MEETINGS

Institution of Electrical Engineers

Inaugural address of the president, Colonel B. H. Leeson, O.B.E., on October 9th.

Radio Section.—Address by E. C. S. Megaw, M.B.E., D.Sc., (chairman) on October 15th.

Discussion on "The Impact of Television on Sound Broadcasting," opener, G. Parr, B.Sc., on October 27th.

The above meetings will be held at 5.30 at Savoy Place, London, W.C.2.

Cambridge Radio Group.—Address by K. N. Hawke, B.Sc., (chairman) at 6.0 on October 14th at the Cambridgeshire Technical College.

North-Eastern Radio Group.—Address by D. R. Parsons (chairman) at 6.15 on October 20th at King's College, Newcastle-on-Tyne.

North-Western Radio Group.—Discussion on "What Practical Benefits can Communication Engineers Expect from the Modern Information Theory?" opener E. C. Cherry, D.Sc. (Eng.), at 6.30 on October 22nd at the Engineers' Club, Albert Square, Manchester.

South Midland Centre.—Address by K. R. Sturley, Ph.D., B.Sc., (chairman) at 6.0 on October 6th at the Grand Hotel, Birmingham.

South Midland Radio Group.—"Why Quantum Theory Matters to Engineers" by D. A. Bell, M.A., B.Sc., at 6.0 on October 27th at the James Watt Memorial Institute, Great Charles Street, Birmingham.

Southern Centre.—"Introduction to the Theory of Information" by J. E. Flood, Ph.D., and L. R. F. Harris at 7.30 on October 10th at the R.A.E. College, Farnborough.

British Institution of Radio Engineers

London Section.—Annual General Meeting, followed by presidential address of W. E. Miller, M.A. (Cantab), at 6.30 on 8th October at the London School of Hygiene and Tropical Medicine, Keppel Street, London, W.C.1.

Scottish Section.—"Recent Developments in Television: Methods of Picture Generation" by H. McGhee (Pye, Ltd.), at 7.0 on 2nd October at the Department of Natural Philosophy, University, Edinburgh.

North-Eastern Section.—"Germanium Crystal Valves, their Characteristics and Application" by B. R. Bettridge at 6.0 on 8th October at the Institution of Mining and Mechanical Engineers, Westgate Road, Newcastle.

West Midlands Section.—"A Survey of Television Development and its Problems" by H. J. Barton-Chapple, B.Sc., at 7.15 on 28th October, at the Wolverhampton and Staffordshire Technical College, Wulfruna Street, Wolverhampton.

British Sound Recording Association

London.—"78, 45 and 33⅓ Records" by B. E. G. Mittell at 7.0 on 24th October at the Royal Society of Arts, Adelphi, London, W.C.2.

Portsmouth Centre.—Anunal exhibition and open evening from 5.0-10.0 on 16th October in the Council Chamber, The Guildhall, Portsmouth. H. Davies, M.Eng. (president), will lecture at 7.0.

Manchester Centre.—"The Electro-Acoustics of Radio Play Production" by Patrick Cambell (B.B.C.) at 7.30 on 20th October at the Engineers' Club, Albert Square, Manchester.

Television Society

"The Viewing of Moving Pictures" (film and television) by Dr. W. D. Wright (Professor of Technical Optics, Imperial College) at 7.0 on 1st October at Film House, Wardour Street, London, W.1. (Joint meeting with the British Kinematograph Society.)

"The Birth of a High-Definition Television System" by S. J. Preston, M.A. (Patent Dept., E.M.I.), at 7.0 on 24th October at the Cinema Exhibitors' Association, 164, Shaftesbury Avenue, London, W.C.2.

Bristol & South Western Centre.—"Large Screen (4ft × 3ft) Television" by D. V. Braun at 7.30 on 7th October at "Carwardines," Baldwin Street, Bristol, 1.

Physical Society

Acoustics Group.—"The American Acoustical Scene" by A. T. Pickles at 5.0 on 13th October at the Science Museum, London, S.W.7.

Institute of Physics

Electronics Group. — "Electrical Analogues," by Dr. G. Liebmann (Associated Electrical Industries), at 5.30 on October 14th at 47, Belgrave Square, London, S.W.1.

Radio Society of Great Britain

Programme of films, including first screening of 1952 National Field Day film, at 6.30 on 31st October at the I.E.E., Savoy Place, London, W.C.1.

Electroencephalographic Society

Annual general meeting, followed by papers, in the Physiological Laboratory, Cambridge, on 4th October.

Radar Association

Radar film show by Cossor, Ltd., at 7.30 on 7th October at the Bedford Corner Hotel, Bedford Square, London, W.1.

Institute of Navigation

Presidential address on "Navigation and Hydrography" by Rear Admiral A. Day at the annual general meeting at 3.0 on 17th October at the Royal Geographical Society, 1, Kensington Gore, London, S.W.7.

Society of Relay Engineers

"Television Wire Broadcasting—P.O. Testing of Licensed Systems" by C. F. W. Hawkins and G. H. Barlow (P.O. Local Line and Wire Broadcasting Branch) at 2.30 on 7th October at 21, Bloomsbury Street, London, W.C.1.

Guild of Radio Service Engineers

Annual general meeting at 11.0 on 5th October at the Market Hotel, Birmingham, 5.

3-WAY MIXER & peak programme meter for recording and large sound installations etc.

One milliwatt output on 600 ohm line (.755 V) for an input of 30 microvolts on 7.5—30 ohm balanced input. Output balanced or unbalanced by internal switch. The meter reading is obtained by a valve voltmeter with 1 second time constant, which reads programme level, and responds to transient peaks.

Calibration in 2 db steps, to plus 12 db and minus 20 db referred to zero level. Special low field internal power packs supplies 8 valves including stabilising and selenium rectifier, consumption 23 watts.

Manufactured by:

VORTEXION LIMITED

257-263, THE BROADWAY, WIMBLEDON, LONDON, S.W.19

Telephones: LIBerty 2814 & 6242-3 *Telegrams: "Vortexion, Wimble, London."*

FREE

THIS VALUABLE BOOK

which details the wide range of Engineering and Commercial courses of modern training offered by E.M.I. Institutes — *the only Postal College which is part of a world-wide Industrial Organisation.*

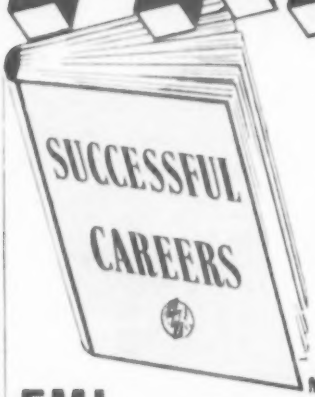

Courses include training for :

City and Guilds Grouped Certificates in Telecommunications; A.M. Brit. I.R.E. Examination, Radio Amateur's Licence, Radio & Television Servicing Certificates, General Radio and Television Courses, Radar, Sound Recording, etc. Also Courses in all other branches of Engineering.

EMI INSTITUTES associated with **MARCONIPHONE COLUMBIA & H.M.V** (His Master's Voice, etc.)

COURSES FROM **£1** PER MONTH

POST NOW

Please send, without obligation, the above FREE book

E.M.I. Institutes, Dept. 16,
43 Grove Park Road, Chiswick, London, W.4.

Name .....

Address .....

IC108

GAS-TIGHT HYPERLOY A.F. TRANSFORMERS AND CHOKES

The widely-used HYPERLOY range of over 100 Specifications is now available in **hermetically-sealed** containers, capable of withstanding the most rigorous climatic conditions.

WW WEARITE

Also available in similar **Gas-tight containers, a series of bi-limboid Transformers having** balanced hum-cancelling windings for use in situations demanding the lowest hum-levels without recourse to expensive mumetal screens.

WRIGHT & WEARIE LTD 138 SLOANE STREET LONDON, S.W.1. SLOane 2214-5

LETTERS TO THE EDITOR

The Editor does not necessarily endorse the opinions expressed by his correspondents

V.H.F. in U.S. and U.K.

I HAVE read the views of J. R. Brinkley on v.h.f. broadcasting in the July *Wireless World* with considerable interest. I wonder if American experience, as reported by Mr. Brinkley, has any valid bearing on the situation in the U.K.

The land area of North America which constitutes I.T.U. Region 2 has only three principal countries requiring medium-wave channels. With some exceptions, centres of population are quite widely separated in North America. The situation here in I.T.U. Region 1 is considerably different both geographically and politically. There just are not sufficient medium-wave channels to adequately serve member states.

There has been very little compulsion in America to accept v.h.f. broadcasting because most large cities have from five to 15 active medium-wave channels available, with average to poor performance. Education of the average American listener to expect lower noise levels and wider bandwidth has until recently been hampered by poor performance of long-line circuits used in network broadcasting. The desirable trend in the direction of higher fidelity which started here is currently reaching large proportions in America.

F.M. broadcasting will ultimately find universal acceptance for reasons which have been adequately demonstrated. In my opinion, the B.B.C. would improve listener service by radiating from the Wrotham v.h.f. station regular schedules of both the Home Service and the Third Programme on f.m.

London, W.2. C. VAN COTT.

"R.F. Characteristics of Capacitors"

THE article in your August issue by R. Davidson focuses attention upon a subject about which little has been published.

At times both the experimenter and the laboratory

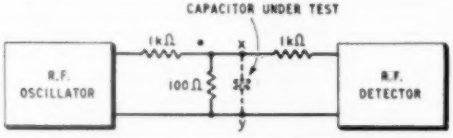

worker need a means of assessing the broad picture of the characteristics of capacitors at radio frequencies and the following method may be of interest to your readers.

Generally, a capacitor is required to have a very low impedance at radio frequency and the method here described compares the impedance of the capacitor under investigation with that of a short piece of wire, at various frequencies. (The term impedance of the capacitor is used, bearing in mind the inductance and resistance of the component and its leads.) The apparatus is shown in the diagram given above. The r.f. oscillator can be a commercial model with variable output and the r.f. detector can be a modified superhet receiver with a calibrated meter in the output stage.

The method is simple. Both the oscillator and detector are tuned to the same frequency and with a two-inch piece of wire across points *x* and *y*, the reading of the output meter is observed. Next the piece of wire is replaced by the capacitor under test and the meter reading again recorded. The difference between these readings is an indication of the amount by which the impedance of the capacitor differs from the impedance presented by the short lead.

A graph of this quantity plotted to a base of frequency shows several interesting points. Portion A—B is characterised by a high capacitive reactance; i.e., to cover this frequency range, a larger value of capacitance is indicated. From B—C there is series resonance in the

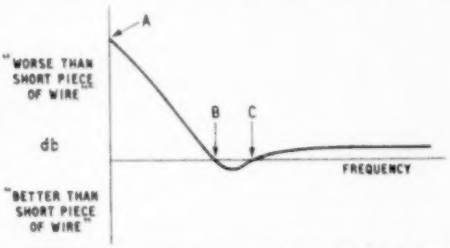

capacitor and its connections and this results in a lower "impedance" than that presented by the two-inch piece of wire. Above C the inductive reactance of the component and its connections becomes excessive.

Provided its limitations are borne in mind and that pick-up is reduced to a minimum, it will be found that this method provides a simple means of assessing the characteristics of medium-value capacitors at the lower radio frequencies.

Portsmouth. FRANK DELLOW.

Too Many Recording Characteristics?

I FEAR that Ruth Jackson (your August issue) has just discovered the existence of a problem which *was* far worse than she thinks, but which already presents a solution. There are at least nine, not three, recording characteristics presently in use in the phonograph field.

Two years ago the Audio Engineering Society proposed the use of a standard *reproducing* characteristic. Use of this would permit reproduction of all present makes of records without change of circuit. At the present time all Capital records, and all material recorded by West Coast organizations, is made exactly to this characteristic. All the others are sufficiently close so that the A.E.S. characteristic is quite satisfactory.

C. J. LEBEL,
Secretary, Audio Engineering Society.

New York, U.S.A.

AS a result of my letter published in the August issue I have received from the Audio Engineering Society of America the accompanying curve of the reproducing

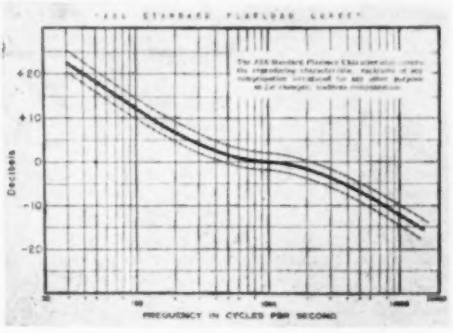

characteristic the Society recommends should be adopted as standard.

It will be noted that it is complementary to, and so provides correction for, a recording characteristic with a drop of approximately 5 db per octave from 800 to 30 c/s, that is flat from approximately 800 to 1,200 c/s, and rises in the order of 3½ db per octave from 1,200 c/s upwards—this being, presumably, what the Society considers to be the best compromise between the ideal in recording and reproduction characteristics.

May I add, in self-defence, that the fact that the Society has taken the trouble to arrive at, and universally recommend, such a characteristic disposes of the criticisms levelled by R. Marker and Henry Morgan (September issue) against my reasons and plea for a standardized recording characteristic.

London, N.6. RUTH JACKSON.

"Faulty Interlacing"

I WOULD like to thank G. N. Patchett for his excellent sync separator circuit in the August issue. This circuit has been tried, and an excellent interlace is produced, but in its present form there is a considerable amount of picture content in the screen grid waveform, which can cause pulling of the line time base. This picture content is the complete vision waveform compressed to 20 per cent of the line pulse amplitude, and is due to the suppressor-to-screen capacitance. The defect can be overcome by the use of an additional diode biased to remove this picture

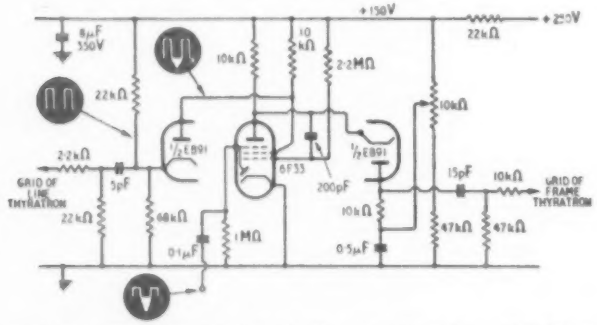

waveform. The accompanying circuit arrangement has been used to clear up this fault.

Weybridge, Surrey. J. E. ATTEW.

[Editorial Note.—G. N. Patchett comments on the above letter: I agree that there is some picture content in the screen grid waveform but my oscillograms show less than 10 per cent. This does cause slight pulling of the line time base which is visible on Test Card "C" but not normally noticeable on a picture. The magnitude of this pulling is increased by a large signal fed to the synchronizing separator. The use of a diode as suggested will remove this trouble and is probably worth while. The trouble could also be overcome by a simple sync separator to remove the picture content before this sync separator circuit.]

I HAVE been trying the sync separator described by G. N. Patchett in your August issue. As the tube in my receiver is grid-modulated and the output from the video stage therefore unsuitable, I fed the separator directly from the detector. The input thus obtained was rather small and I had doubts as to whether the separator would operate efficiently. However, the separator appears to work satisfactorily with an h.t. supply of 50 V. With a voltage somewhat greater than this V, could be cut off, with the input available, for the vision content of the signal.

The line structure and synchronization are rigid, the interlacing good, and the video output is now rather better for high frequencies since a separator is not operating from it.

I used VR 116 and VR 54 valves and the h.t. consumption at 50 V is 2 mA, rising to about 5 mA at 250 V.

London, W.4. R. V. SHARMAN.

Encouraging Morse Operating

IN two world wars radio amateurs have formed a useful nucleus of morse operators who could be readily trained for the Defence Services. The matter is of greater importance now that the Post Office no longer teaches morse and its competent telegraphists have mostly gone on pension in old age.

Perhaps by juggling licence fees the Post Office could usefully differentiate between exclusively morse operators and the hordes of radio-telephonists who monopolize the channels and are useless for defence purposes in time of war.

Ashford, Kent. WM. A. RICHARDSON.

Television Bandwidth

IT was a shock to hear from several manufacturers at the Radio Show that their television sets were not designed to reproduce greater definition than that provided by 2.75 Mc/s bandwidth. The usual reply to my query as to "why?" was "What is the use; the B.B.C. aren't giving any more." Two went so far as to say that this bandwidth is transmitted only on Alexandra Palace with its double sideband transmissions and not on the other vestigial sideband transmissions which were giving less.

On my own set (without obvious "ringing") a comparison between the detail of Test Card "C" and the average transmission from O.B.'s, studios and films alike shows that 3-Mc/s definition is there. Admittedly there are obvious factors which can occasionally spoil the definition such as bad focusing, poor lighting and, in some cases, cameras that seem incapable of giving the required definition in any circumstances. In each transmission, however, there are periods which demonstrate that the full bandwidth can be transmitted.

The aim, both of the B.B.C. and the manufacturers should be to maintain this standard. I quite believe that the B.B.C., as in its sound broadcasts, uses every endeavour to give us the highest quality that is technically attainable. Any sign of catering for a lower standard would indeed be a retrograde step on their part. On the manufacturers' side competition and pride alike should prompt them to give the best possible despite the exhorbitant purchase tax.

London, W.8. W. MACLANACHAN.

Capacitance Units

ALTHOUGH the maximum/minimum ratios of the values of capacitors and resistors used in radio have always been largely similar, the expression of these values, so far as resistors are concerned, has been greatly simplified by the symbols *M* and *k*. The stumbling block with capacitors has always been that ridiculous unit of capacity employed, the microfarad.

M. G. Scroggie's decision to adopt the nanofarad (your September issue) is commendable enough; the only possible objection is the chance of confusion, in workshops and elsewhere, between *M* and *n* because of verbal similarity. If capacitance was expressed in picofarads, we could use *M* and *k* as with resistors: thus 1 picofarad would become 1p; 1000 pf, 1 kp; and 1 microfarad, 1 Mp.

Kirkcaldy JAMES NICOL.

ELECTRONIC SWITCHING

Part 1.—Principles of the Use of Cold-cathode Gas Discharge Tubes

By E. A. R. PEDDLE* B.Sc. (Hons.)

EXTENSIVE investigation into the phenomenon of the conduction of electricity in gases has led in recent years to the development and production of gas discharge devices that are stable and reliable in operation. The gas discharge tube has two possible states: one in which the gas is, for practical purposes, an insulator, and the other in which it is ionized and therefore conducting. It is this property which is utilized in switching applications.

There are three main advantages in using gas discharge devices for such purposes. The power consumption is low, there being no heater elements to absorb power as in thermionic valves, and the life is long, a service representing 10-20 years of life being possible. Compared with mechanical switches, there are no moving parts to wear out or to require frequent adjustment and cleaning, and maintenance is further simplified since the discharge is visible in operation so that faults can be easily traced by inspection.

Mechanism of Gas Discharge

In construction the cold cathode discharge tube consists of two or more metal electrodes surrounded by a gas inside a glass envelope. The gas is usually neon or argon or a mixture of these two, at a pressure of about 50 mm of mercury. The cathode is usually made of nickel or molybdenum and is often coated with an activating substance such as barium or potassium. The three principal characteristics of such a device are those relating to the transfer of the insulating to the conducting state (breakdown), the conducting state itself, and the return from the conducting to the insulating state (extinction).

The mechanism of electrical breakdown in gases depends for its action upon the presence of initial ionization in the body of the gas. Normally, external ionizing agents such as cosmic and ultra-violet radiations produce such initial ionization, which is equivalent to a current of the order of 10^{-18} amp. If a potential is applied between the anode and cathode of a cold cathode diode, a number of electrons, equal to the number produced in the gas by external ionizing agents, reaches the anode every second. As the applied potential is slowly increased, the moving electrons are accelerated and eventually gain sufficient energy to ionize the neutral atoms present by collision. Further ionization is then produced by secondary effects[1] and the current increases rapidly, a self-sustaining discharge taking place in the tube. The onset of this discharge is characterized by a sudden fall in potential across the tube. In practice a load resistor, used in series with the two electrodes, limits the discharge to a glow regime characterized by a luminous glow near the cathode surface and usually a more diffuse glow near the anode.

The applied potential at which the discharge and hence the current in the tube becomes self-sustaining is called the breakdown potential. Its value depends upon that of the initial ionization present. Operating a tube in darkness, for example, reduces the ionization due to external radiations, and so causes a considerable increase in breakdown potential. The breakdown mechanism occupies a finite time, which can be reduced by applying potentials greater than the breakdown potential. Breakdown times as low as 30 μsec or, in more complex devices, 5 μsec can be reached by this means.

When the tube is conducting, the potential between anode and cathode is called the maintaining voltage, and is a characteristic of the gas and the cathode surface. By coating the cathode surface with substances having a low work function, such as barium or potassium, maintaining voltages of the order of 50-90 volts can be obtained. The breakdown voltages are much higher, e.g., 150-250 volts, so that the drop in anode

Fig. 1. Maintaining voltage characteristics of a cold-cathode discharge tube.

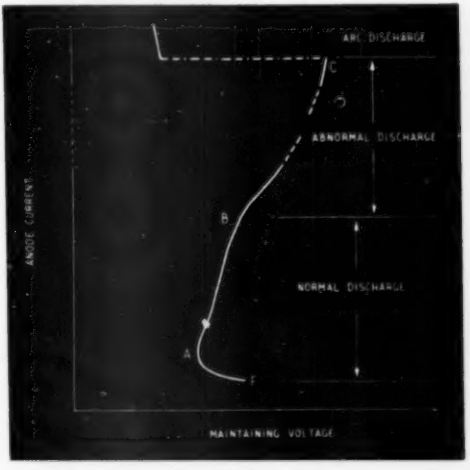

* Research Laboratories of The General Electric Company.

[1] L. B. Loeb, "Problem of the Mechanism of the Static Spark Discharge," *Rev. Mod. Phys.*, **8**, 267 (1936).

potential when the tube breaks down can be quite large.

The variation of maintaining voltage with anode current for a typical tube is shown in Fig. 1. From A to B, the cathode glow does not completely cover the cathode surface, the current density in the glow is constant and the maintaining voltage varies little with current. In the range A to B, which is determined by the area and nature of the cathode surface, the discharge regime is said to be normal, and tubes are usually operated in this condition. Above B, the glow completely covers the cathode surface and is no longer at constant current density. With further increase in current, the maintaining voltage also increases and the discharge is then said to be abnormal. When the point C is reached, the current increases rapidly owing to thermal emission from the cathode and an arc discharge occurs. This can cause rapid deterioration of the cathode surface, and tubes should preferably not be operated in this way.

In Fig. 1, it is seen that point A represents a minimum value of the maintaining voltage, and point F a minimum value of anode current below which the discharge will not maintain itself. These minimum values are called extinction values, and are usually of the order of 50μA or less.

A conducting tube may, of course, be extinguished by making a physical disconnection in the appropriate circuit. Other methods are to reduce the anode-to-cathode voltage or supply potential to a value below the extinction voltage, or to reduce the current below the extinction value. When the tube is extinguished,

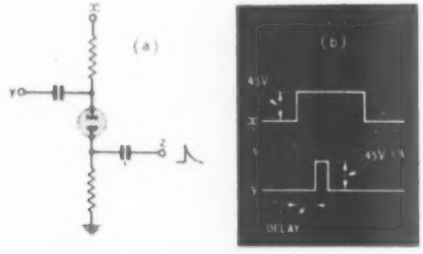

Fig. 2. Cold-cathode diode co-incidence gate (a), and (b) two typical co-incidence pulses.

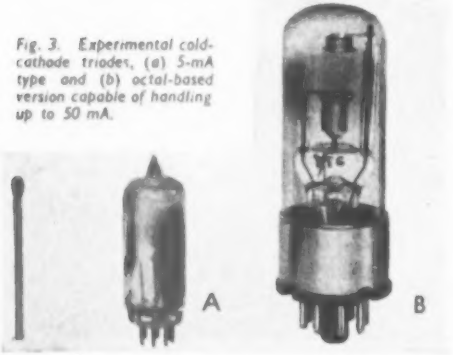

Fig. 3. Experimental cold-cathode triodes, (a) 5-mA type and (b) octal-based version capable of handling up to 50 mA.

TABLE I
Typical Characteristics

DIODE		TRIODE (B7G TYPE)	
Breakdown Potential	60–80 volts	Anode Breakdown Potential	200–240 volts
		Trigger Breakdown Potential	85–100 volts
Maintaining Voltage	50–60 volts	Anode Maintaining Potential at 1 mA	80–90 volts
		Trigger Maintaining Potential at 1 μA	70–80 volts
Maximum Operating Current	1 mA	Maximum Operating Current	5 mA

the decay of the ionization takes a finite time. The extinction process must therefore be applied for a time long enough to ensure that, on re-application of the circuit conditions prior to breakdown, the residual ionization alone is insufficient to re-initiate breakdown. The minimum time required to extinguish the tube is called the de-ionization or extinction time, and varies according to the method of extinction, circuit parameters and conducting conditions. In practical applications the extinction time cannot be accurately estimated, and manufacturers' measurements made under fixed and stated conditions can only be a guide to the circuit designer. In general, the extinction time varies from 0.5 to 5 msec, which is very much greater than the breakdown time, and this relatively high value constitutes a serious limit to the speed of operation in many applications.

Electronic Gate

Cold cathode diodes which are suitable for use as switching elements are usually small in size, inexpensive, and wire-ended so that they can be soldered directly into circuits. They are also symmetrical, so that either electrode can be used as the cathode. Typical values for their main characteristics are given in Table I.

The most important application of such diodes is as an electronic gate, one variety of which is shown in Fig. 2(a). Here, neither of the applied pulses x and y is alone sufficient to cause breakdown or maintain a discharge. However, when x and y are coincident, as shown in Fig. 2(b), the anode potential is raised to 90 volts, which is sufficient to cause breakdown and produce an output potential z. The time delay between the application of x and y is necessary to allow the anode potential of the diode to reach 45 volts before the application of pulse y. If x were connected to an electronic store where information is represented as the presence or absence of a potential, then the diode could be used to read this information, the pulse y producing an output pulse at z if a potential has been stored.

The cold cathode triode [2 3] contains a third,

[2] A. L. Chilcot and F. G. Heymann, "Potassium-Activated Cold Cathode Tubes," *Jnl. Sci. Instr.*, 26, 289 (1949).

[3] W. E. Ballis and C. H. Thomas, "A New Cold Cathode Triode," *Electronics*, 11, 14 (1938).

"trigger," electrode which can be used to initiate the discharge between the other two electrodes, the anode and cathode. The size of the tube varies according to its current-carrying capacity, from miniature 1-mA tubes to larger 5-mA B7G-sized tubes, Fig. 3(a), and octal-based types capable of operation at current of about 50 mA, Fig. 3 (b).

As stated above, the breakdown potential of a tube can be greatly reduced by increasing the initial ionization, and this is achieved in the triode by means of the trigger electrode. A potential smaller than the breakdown potential is applied to the anode, and one greater than the trigger-cathode breakdown potential is applied to the trigger electrode. Breakdown then occurs and current flows across the trigger-cathode gap, producing ionization which initiates a discharge between anode and cathode. The trigger current at which this occurs is called the transfer current, i_{tr}, and varies with applied anode potential as shown in Fig. 4. Transfer can be obtained with very low values of i_{tr}, enabling a low power stimulus to trigger the tube. For a given applied trigger potential, two factors influence the trigger current which passes when only the trigger-cathode gap is conducting. These are the maintaining voltage of the trigger gap and the trigger load resistor used to limit the discharge. The transfer current, and hence the triggering mechanism, can therefore be controlled by adjusting the value of the trigger load resistor, R_T. This is illustrated in Fig. 5, which shows the relation between anode potential and trigger potential necessary to trigger the tube, for various values of R_T.

The triggering time, which elapses between the application of the triggering potential and the onset of a self-sustaining discharge between anode and cathode, is composed of the breakdown time of the trigger gap and the time needed for transfer to take place. Fig. 6 shows the triggering time as a function of the triggering potential, again for various values of R_T. The effect of increasing anode potential or trigger bias is to decrease the triggering time.

Once the tube is conducting, the trigger electrode has no further part to play, and the triode is extinguished in the same way as the diode, i.e. by applying an extinction process to the anode-cathode circuit. In normal operation the trigger electrode is biased positively with respect to the cathode, and the tube is triggered by raising the bias potential to the required value. Since the bias potential is normally lower than the trigger gap extinction voltage, the trigger gap does not remain conducting when the main gap is extinguished. Typical values for the characteristics of cold cathode triodes are given in Table I.

Primed Tubes

In a special class of tubes, known as primed gap triodes, an auxiliary discharge is maintained in the tube. This is achieved by the insertion of an additional single electrode, the discharge taking place between it and another electrode, or an additional pair of the electrodes, the discharge taking place between them. The ionization from this discharge is insufficient to trigger the tube, and normal triggering techniques are used. The advantages of primed tubes are that the triggering potential can be stabilized, since breakdown is made independent of external conditions. Primed tubes are used in the same applications as non-primed triodes.

(To be concluded.)

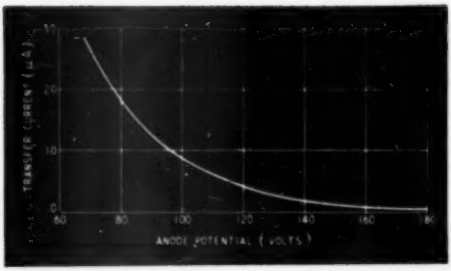

Fig. 4. Transfer current characteristics of cold-cathode triode with triggering electrode.

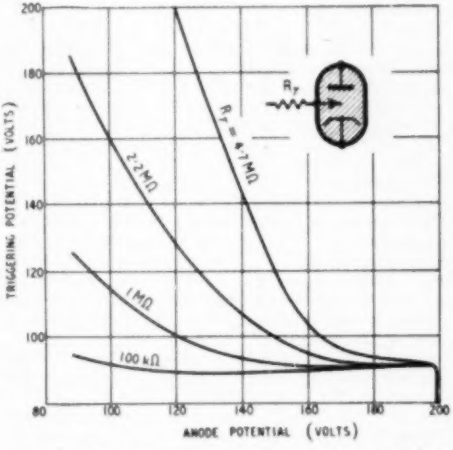

Fig. 5. Static triggering characteristic of a cold-cathode triode.

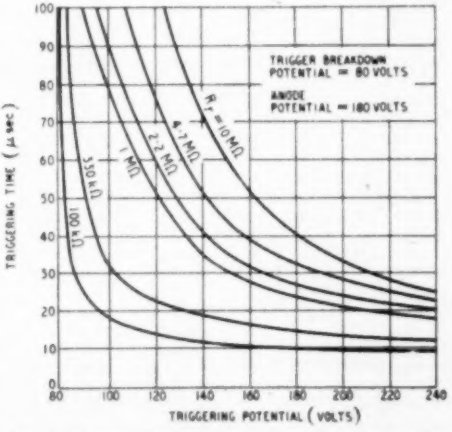

Fig. 6. Dynamic triggering characteristic of a cold-cathode triode.

Television "A.G.C." Circuit

Simple System for Stabilizing Mean Brightness

By G. F. JOHNSON, B.Sc.

WHILE on holiday in Somerset, the author had the opportunity of seeing fringe area reception from the Sutton Coldfield television transmitter. The fading was such that the contrast control frequently needed resetting, and it seemed very desirable to provide some form of automatic control. However, only a few parts and tools (brought in case an elderly sound receiver had needed a tonic) were to hand.

In a television receiver, a bias voltage is effectively added to the video output voltage when the latter is applied to the cathode-ray tube. This bias is adjusted by the brightness control so that the beam current of the tube is almost cut off when the video output voltage corresponds to black level in the transmission. If too little bias is applied, the black parts of the picture will be illuminated to some degree; however, none of the shading detail of the picture will be lost. If the bias is excessive, the cathode-ray tube will remain cut off until the video signal rises sufficiently to overcome it, and the darker shades will be reproduced as uniform black. They are therefore completely lacking in detail, and the picture becomes very unrealistic. This is a form of distortion which has no counterpart in a purely optical system.

Fading of the signal with a constant setting of the brightness control will lead to the forms of distortion just mentioned, since the video output voltage corresponding to black level (30 per cent modulation at the transmitter) will change. The bias will therefore no longer have the correct value in relation to the signal. The brightness control may be altered to correct the black level of the picture, but the change in contrast due to the fading will still remain uncorrected.

If the gain of the receiver is altered to keep the black level video output voltage constant to correct for fading, both the black level and contrast of the received picture will remain unaltered. The gain is usually set by bias applied to one or more of the high-frequency amplifying valves. The contrast and sensitivity controls usually provide fine and coarse adjustments, respectively, of this bias.

If this grid bias could be obtained from the video output voltage in a suitable manner, automatic control of the gain of the receiver to combat fading could be obtained.

Possible Methods

With the negative modulation system (used in America and certain other countries) the sync-pulse tips represent 100 per cent transmitter modulation. All that is necessary, therefore, is to arrange the a.g.c. to maintain constant the peak video output voltage. A voltage delayed diode, together with a capacitor circuit having a discharge time constant long compared with the charge time constant, may be used to accomplish this.

Such a diode circuit is sometimes used for limiting impulsive interference in British receivers, and Fig. 1 shows ways of obtaining a.g.c. voltage by modifying the limiter circuit. With the positive-modulation system, used in Britain, however, 100 per cent transmitter modulation corresponds to brightest white (termed "peak white"). An a.g.c. circuit of this kind would enable correct reproduction only if peak white were always present in the transmitted picture; consequently it is hardly a practical method.

The ideal solution would be to arrange the a.g.c. circuit to sample the video signal and maintain con-

Fig. 1. Possible ways of obtaining a.g.c. voltage from interference-limiting diode

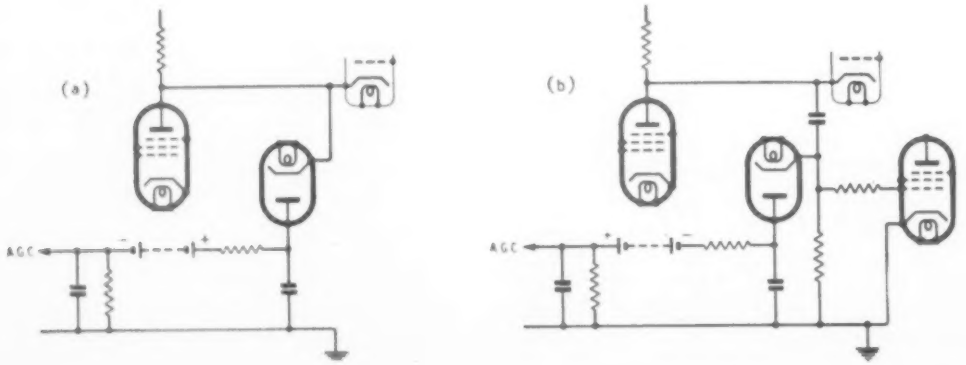

stant its black-level value. It would, however, demand a good deal of extra equipment and, almost certainly, the addition of one or more valves. The provision of a "Black Level Clamp" to fix the voltage of black level in the video output irrespective of fading would be nearly as complicated.

In some receivers, a d.c. restoring diode is used following a capacitance coupling for the video signal. The diode serves to fix the sync-pulse tips at some chosen potential by rectifying a small part of them to provide the necessary bias. If this diode were cut off for the duration of every sync pulse, it would be unable to fix the voltage of the sync-pulse tips, and could be made instead to clamp the black level of the video signal at some chosen potential.

If the d.c. component of the video signal is omitted in the receiver by using a capacitance coupling for the video signal, and if no d.c. restoring diode is used, the effect of signal variations due to fading and reflections from moving objects is made less noticeable.[1] This is because a constant voltage (whose value is set by the brightness control) is inserted in place of the d.c. component (i.e., the true average value of the signal) and the signal appears to have a constant average value equal to this. Variation of the signal does not then greatly affect the brightness of the picture, although the contrast and the black level change.

The disadvantages resulting from loss of the d.c. component are, in practice, not as great as one might expect. There is very little noticeable error in the black level, as set by the brightness control, except during a programme fade-out or the transmission of a dark scene. In these cases, the black parts of the picture become light and the frame fly-back lines become visible.

The effect on a fade-out is obviously not of much importance. To obtain correct reproduction of a dark scene, however, it is necessary to readjust the black level. In the author's experience this is frequently the case with a normal receiver, as the black level often appears to be reduced in the transmission to represent darkness, instead of remaining constant while the contrast is reduced. This change of black level is in the opposite direction to that produced by omitting the d.c. component in the receiver, and the two effects cancel to some extent.

[1] A. H. Cooper, "Television Interference By Aircraft," *Wireless World*, April 1949, p. 142.

Fig. 2. Parts of receiver before modification.

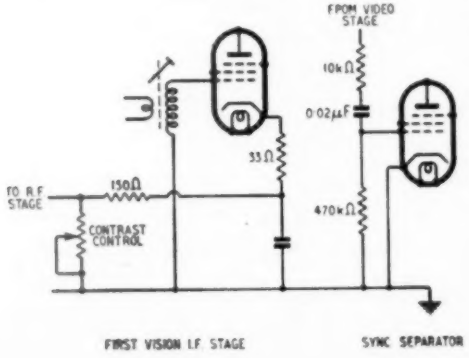

If, on the other hand, the d.c. component of the signal is retained in the video amplifier but is also applied to an a.g.c. circuit, it may be kept nearly constant irrespective of fading of the received signal or changes in the transmitted picture. However, unlike the case in which the d.c. component is omitted, the receiver contrast will vary with the nature of the transmitted picture in such a way as to maintain constant the average value of the signal. Fortunately, this variation of contrast is in general small, and reception is as satisfactory as that obtained with the d.c. component omitted, with the added advantage that the effects of fading are very much reduced.

The modification needed to obtain this performance is often relatively simple. The writer tried out the idea on a receiver which had, for its relevant parts, the circuit of Fig. 2. The receiver (a Cossor superheterodyne used with a single-valve pre-amplifier) has an r.f., stage frequency changer, two sound i.f. and two vision i.f. stages. All these use 6AM6 (equivalent to EF91 or 6F12) valves. The contrast control operates on the cathode circuits of the r.f. and first vision i.f. valves. These include at the cathode an unbypassed resistor of 33Ω to reduce the change of input impedance resulting from a change in bias. A.g.c. is applied to the first sound i.f. stage.

Since the fading of the sound signal occurred at different times from that of the vision signal, it was decided to keep the gain of the common stages at maximum. This had the added advantage of providing the highest available input to the frequency changer, and resulted in a slight improvement in signal to noise ratio.

Sync-Separator Action

The grid circuit of the synchronizing separator was found to be as shown in Fig. 2. The series resistance (in series with the output impedance of the video stage), and the grid-leak resistance, control the slicing action of the separator. They are chosen so that the valve changes between the non-conducting and the conducting state over a range of the input signal which does not extend to either limit of the sync-pulse amplitude under normal conditions. With the component values shown, a rough calculation[2] (assuming an input signal with black level at 30 per cent where peak white is 100 per cent) shows that slicing takes place at about 19 per cent for an all-white signal and at about 6 per cent for an all-black signal. The average values of the signal are approximately 85 per cent and 27 per cent for white and black respectively. The average voltage across the 470-kΩ leak (assuming that slicing takes place and grid current starts at $V_g=0$) is given by the difference in the figures above; i.e., 66 per cent of the peak white video output voltage for an all-white signal and 21 per cent for an all-black signal. These figures are, as might be expected, in the same ratio as those for the average values of the signal. For a video signal of -30 volts peak white, the voltage across the leak would thus lie between the extremes of -20 volts and -6 volts.

For maximum gain, the control-grid circuit of the first i.f. amplifier is returned to chassis potential. For anode current cut off, the bias needed will be about -5 volts. If a constant difference of average voltage could be maintained between the grid of the first i.f. amplifier and the grid of the sync separator, the average voltage of the latter would not change by

[2] W. T. Cocking, "Television Receiving Equipment," (Iliffe).

more than five volts provided that the signal was within the range over which control was held by the i.f. valve.

Effective a.g.c. action is thus obtainable without any additional amplifier, particularly if more than one stage is controlled by the a.g.c. voltage. Control should not, of course, be applied to the last high-frequency valve, since it would become unable to provide the necessary undistorted output.

Practical Circuit

A battery, together with a resistance-capacitance circuit for averaging, could be used to maintain the voltage difference. It is, however, desirable to be able to vary the voltage at will, and inconvenient to incorporate a battery in a mains-operated receiver. Fortunately, a constant average voltage may be maintained across the sync-separator grid leak by simply feeding a constant average current through it. The circuit is shown in Fig. 3.

The 2.2-MΩ resistor (together with the voltage-dividing network formed by the 150-kΩ fixed and the 100-kΩ variable) forms an adjustable current source, having a resistance which is high compared with the sync-separator grid leak. The 0.1-μF capacitor completes the grid return of the valve at intermediate frequencies and, together with the high source resistance of the control voltage, forms an averaging (smoothing) circuit for the bias. In the superheterodyne receiver, the insertion of this capacitor did not have any noticeable effect on the performance, although investigation of the i.f. response curve might have revealed slight mistuning of the grid circuit. In the case of a t.r.f. receiver, it would probably be essential to use a separate ceramic or mica capacitor for the r.f. grid return, and even then to retune the circuit. Any damping resistor present should remain connected across the coil; if taken to chassis it would short circuit the a.g.c. voltage. The metal rectifier (Westector) was included to prevent the i.f. valve bias becoming positive in the absence of sufficient video signal.

In modifying a second receiver of the same type, a 1N22 crystal was tried but proved to have too small a reverse resistance to be of any use, since a value greater than about two megohms is needed.

The initial grid bias is altered slightly because of the voltage drop across the rectifier. The cathode-bias resistor of the first i.f. stage could be changed to compensate for this; but since it provides negative current feedback for d.c., the change in anode current is about halved. It is thus unlikely that the valve will be overrun. If a thermionic rectifier were used, the residual grid bias would be negative and the maximum gain slightly reduced.

Seen from the 0.1-μF capacitor, the impedance of the sync separator for low frequencies is somewhat higher than the value of the leak. The time constant of the averaging circuit is given by this impedance, in parallel with the resistance of the current source and the leakage resistance of the rectifier, multiplied by the capacitor value. With the values used, the time constant is about 0.035 second or nearly twice the frame scanning period. This gives the a.g.c. a rapid action, and may actually result in horizontal streaking of the picture if the brightness is unevenly distributed vertically, since the contrast will then vary slightly during the frame scan. The rapid action is, however, very effective in removing flicker caused by reflections from aircraft. A capacitor value of 0.25 μF or more could be used if a slower action were desired.

The negative a.g.c. voltage at the earthy end of the sync separator grid leak will cause a slight reduction in the signal level at which slicing takes place in the sync separator. This effect is a minimum for weak signals, where clean separation is most important, and is quite negligible.

Performance

The a.g.c. adjustment was arranged as an armchair control. For a.g.c. use, the contrast is set at maximum. The contrast control may be used in the ordinary way if the a.g.c. adjustment is set at maximum. Normal operation of the receiver is thus not prevented by the modification, and a rapid comparison of reception with and without a.g.c. may be made at any time.

When using a.g.c., the armchair control is set to suit the requirements of the particular programme, and in practice may not require readjustment for a matter of hours. The occasional obvious error in the black level may easily be remedied, and is a very minor disadvantage when compared with the fading previously experienced.

The modification was carried out without removal of the receiver chassis from the cabinet, sufficient access being gained by the removal of the bottom panel. The usual precautions necessary with a live chassis receiver were taken.

Although the system is not an ideal one, in that it varies the receiver gain in accordance with the mean brightness instead of the black level, it does in practice result in improved performance, and its great simplicity makes it easy to try out. It may thus find much application in cases where the complexity and additional equipment of an ideal method make it inappropriate.

Fig. 3. Final form of automatic gain control circuit.

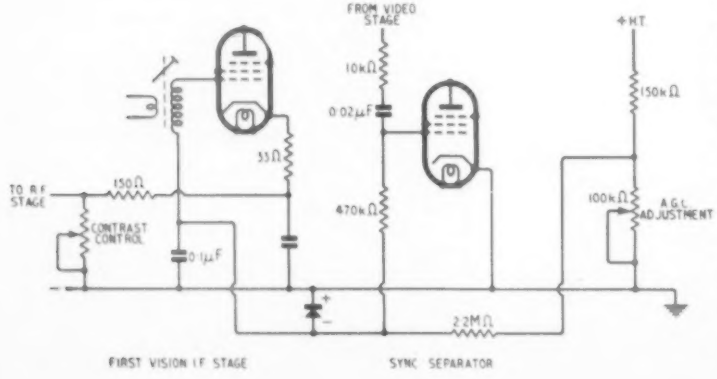

MARCONI

offers appointments to

DEVELOPMENT ENGINEERS

PROJECT ENGINEERS

TECHNICAL SALES ENGINEERS

It is a tradition for Marconi's Wireless Telegraph Company Limited, with its unique reputation, to point the way in all branches of avionic research and development.

Today the Company has vacancies for suitably qualified engineers who have experience of airborne and ground based H.F., V.H.F. or U.H.F. communication equipment or navigational aids.

Attractive careers await such men who wish to become: DEVELOPMENT ENGINEERS; PROJECT ENGINEERS; TECHNICAL SALES ENGINEERS.

You are invited to write, giving full personal details and quoting the reference S.A.20 to :—

Central Personnel Services,
MARCONI'S WIRELESS TELEGRAPH COMPANY LTD.
24/30 Gillingham Street, London, S.W.1

Your application will, of course, be treated in strict confidence.

Sound Sales 21st Birthday.....

Sound Sales Limited was incorporated as a Company on the 19th September 1931. The object being to produce the best possible Transformers and Chokes, together with Quality Amplifiers, Radio and Loudspeakers.

On our 21st birthday, we should like to take the opportunity of thanking all our customers, and particularly those who supported us in the early days and are still confirmed Sound Sales fans.

Until we think of something better, we shall concentrate on the production of our Transformers, the famous A-Z Amplifier and Projection Television.

SOUND SALES LIMITED

WEST STREET, FARNHAM, SURREY.

& 125 Oxford Street, London

THE
WESTON
E772
Super Sensitive Analyser

No 10. **Multi-Range Testing Instruments**

Best known of all instruments for the testing and servicing of radio and television equipment is undoubtedly the Weston Model E.772 Analyser, a first-class portable instrument with a sensitivity of 20,000 ohms per volt on all D.C. ranges and 1,000 ohms per volt on all A.C. ranges. The additional features of wide range coverage, robust construction and simplicity in operation contribute toward making the E.772 ideal also for laboratory and research work. Full details of this instrument and also of the Model 5.75—a Test Set covering 53 ranges—will gladly be supplied on request.

SANGAMO WESTON LIMITED · ENFIELD, MIDDLESEX

TELEPHONE: ENFIELD 3434 (6 lines) and 1242 (4 lines). **GRAMS: SANWEST, ENFIELD**

Branches: London Office: St. Georges Court, New Oxford Street, W.C.1. Telephone: CHAncery 4971.

GLASGOW	MANCHESTER	NEWCASTLE	LEEDS	LIVERPOOL	WOLVERHAMPTON	NOTTINGHAM	BRISTOL	SOUTHAMPTON	BRIGHTON
Central 6208	Central 7904	Newcastle 26867	Leeds 30867	Central 0230	Wolverhampton 21912	Nottingham 43403	Bristol 21781	Southampton 3328	Brighton 28497

DELTA MODULATION

Transmitter Using Quantized Feedback

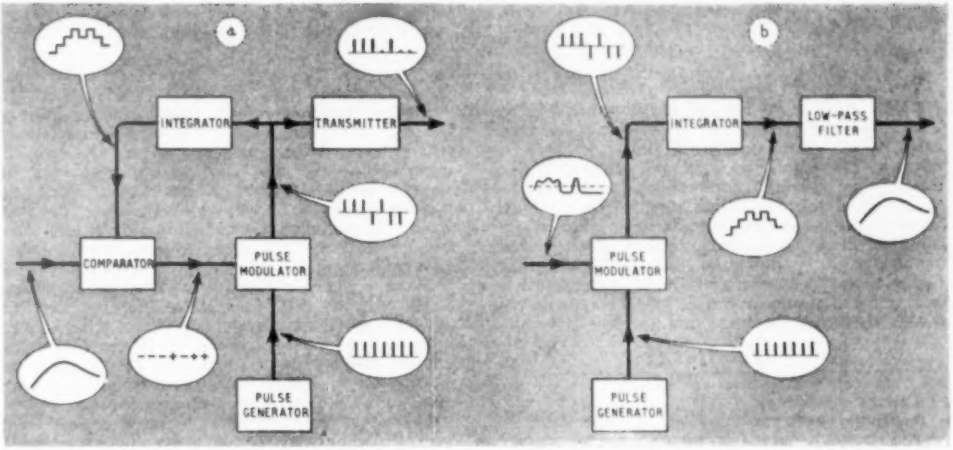

Block diagram showing the essentials of the system. The transmitting equipment is at (a) and the receiving equipment is at (b). The waveform at the receiver input is a badly-distorted version of the pulse train radiated from the transmitter.

ONE of the many interesting papers read at the recent symposium on applications of information theory at the I.E.E. described a new and somewhat unusual form of pulse modulation. It is a coded system, but differs from conventional pulse code modulation in that it transmits *changes* in the modulating waveform rather than actual voltage levels. In fact, another name for the system might be "servo modulation," for these transmitted changes are actually the "error-signals" of a kind of servo loop in which the modulating waveform is compared with an approximating waveform that tries to follow it all the time. Like ordinary p.c.m., delta-modulation is less vulnerable to interference than non-coded systems of pulse modulation, but has the advantage over p.c.m. that it does not require such complicated equipment.

The essentials of the equipment are shown in the block diagram. At (a) a pulse generator produces a train of equidistant pulses which go through a pulse modulator to the transmitter. In the pulse modulator their polarity is either left as it is or reversed, according to the polarity of a difference voltage obtained by comparison of the modulating waveform with the approximating waveform as mentioned above. This approximating waveform is produced by passing the pulses from the modulator through an integrating network, where each unchanged pulse raises the output voltage a certain amount and each reversed pulse lowers it an equal amount; the result being a staircase-type waveform which follows the ups and downs of the modulating waveform as shown. If, when a new step is to be added to the staircase, the modulating signal is greater than the staircase signal, it is an indication that the modulating waveform is rising and will probably continue to rise; the polarity of the difference voltage, or error-signal, is then such as to cause the pulse modulator to send an unchanged pulse to the integrator, so that the staircase waveform also rises, by one step. Similarly, if the modulating signal is smaller, its waveform is probably falling, so a reversed pulse goes to the integrator and the staircase waveform also falls. Actually the transmitter only radiates the unchanged pulses (staircase ascending), so the reversed pulses (staircase descending) are represented simply by gaps in the pulse train.

The function of the equipment at the receiving end (b) is to reconstruct the staircase waveform from the "up-or-down" type of information given by the pulses coming in from the receiver. To do this it uses a chain of apparatus similar to that in the transmitter. A local pulse generator (synchronized with the one in the transmitter) sends pulses to a modulator, which determines their polarity according to the polarity of the received error-signals. The train of mixed pulses so produced is then converted by another integrating network into a replica of the original staircase waveform. Finally, a low-pass filter smooths out the steps and a continuous waveform is obtained that closely resembles the original modulating waveform.

In the course of transmission the pulse train may become badly distorted, as shown, as a result of interference, but the shape of the received pulses does not matter very much as long as they can at least indicate their presence or absence. The interference, in fact, can be as much as half the pulse amplitude before it has any perceptible effect on the final reconstituted waveform at the receiving end.

A description of the system was also given by J. F. Schouten, F. de Jager and J. A. Greefkes in the March, 1952, issue of the *Philips Technical Review*.

F.M. FEEDER UNIT

(Concluded from page 338 of previous issue.)

Part 2.—Constructional Details and Alignment Procedure

By S. W. AMOS,* B.Sc. (Hons.) A.M.I.E.E., and G. G. JOHNSTONE,* B.Sc. (Hons.)

THE general layout of the feeder unit can be seen from the various illustrations and the wiring is quite straightforward, but care should be taken to keep connections as short as possible particularly in the r.f. and oscillator sections. As suggested in the full circuit diagram all earth connections for a particular valve are returned to a common earth connection, actually a tag secured to the chassis by one of the valve-holder bolts. One side of the valve heater, and the r.f. bypass capacitor from the other side of the heater, are returned also to this same earth connection.

COIL DATA

Circuit position	Circuit reference	Details
Aerial coil	L1 ..	1 turn 26 s.w.g. enamelled copper, interwound at earthy end of L2.
	L2 ..	5 turns 26 s.w.g. enamelled copper, occupying 0.3 in.
R.F. Anode coil	L3 ..	5 turns 26 s.w.g. enamelled copper, occupying 0.3 in. Wound as continuation of L4, and spaced 0.3 in from latter.
	L4 ..	3½ turns 26 s.w.g. enamelled copper, close wound bifilar-winding with L5.
	L5 ..	3½ turns 26 s.w.g. enamelled copper, close wound bifilar-winding with L4.
Oscillator	L6 ..	4 turns 18 s.w.g. tinned copper, tapped at 1¼ turns from earthy end, occupying 0.5 in.
1st i.f. transformer	L7, L8	Both 24 turns 40 s.w.g. enamelled copper close wound. 0.4 in gap between windings.
Detector unit	L9 ..	24 turns 40 s.w.g. enamelled copper close wound. 0.5 in. gap between L9 and L11.
	L10	4½ turns 40 s.w.g. enamelled copper close wound over top ("cold") end of L9.
	L11	18 turns 32 s.w.g. enamelled copper, wound as bifilar (9 turns each section), occupying 0.45 in.

All coil formers Aladdin type 5892; dust iron cores Aladdin type PP5804. Details of i.f. transformer and detector unit wiring see Figs. 3 and 4.

* *B.B.C. Engineering Training Dept.*

All the inductors in the unit, including those in the i.f. transformers are wound on Aladdin formers type 5892 of 0.415 in diameter. These are internally threaded to take dust-iron tuning slugs used for adjustment of inductance, those used being the Aladdin type PP5804. It has been found advisable to wax the threads of the dust-iron cores before insertion in the formers to ensure freedom from play and to ensure that the cores remain in position when adjusted. Alternatively a strand of cotton wound in the threads may provide sufficient packing for the purpose. The cans for the i.f. transformers are 1½ in square by 3 in high and can be obtained on the surplus market. A short description of each coil follows but, for ease of reference, complete winding details of all inductors are given in the table.

The aerial coil comprises 5 turns of 26 s.w.g. enamelled-copper wire wound to occupy approximately 0.3 in length on the former. The aerial coupling winding consists of a single loop of the same guage wire interwound with the 5-turn coil at its earthy end. To facilitate winding, a layer of transparent plastic tape is first wound on the former with the adhesive side outwards; this retains the wire in position as the turns are put on. When the winding is completed, a further layer of the tape (with adhesive side inwards) is placed over the winding. This affords some protection and also prevents movement of the turns; the technique is used with all coils with the exception of the oscillator coil.

The r.f. anode coil is of somewhat more complex construction. The winding connected between V_1 anode and cathode is in two sections, one forming the series inductor L_3 and the other the primary winding L_4 of the transformer. L_3 consists of 5 turns of 26 s.w.g. enamelled copper wire spaced to occupy a winding length of 0.3 in and L_4 consists of 3½ turns close wound, bifilar fashion, with L_5. There is a space of 0.3 in between the two sections of the coil. The secondary winding L_5 also comprises 3½ turns of 26 s.w.g. enamelled copper wire. A single tuning core is used and is adjusted during alignment for maximum output.

The oscillator coil consists of 4 turns of 18 s.w.g. tinned copper wire wound to occupy a length of 0.5 in. The coil is tapped at 1¼ turns from the bottom (earthy end) to connect the coupling winding from the r.f. stage. The ends of the coil are connected, one directly to earth and the other to a tag of a three-way tag strip mounted on one of the fixing bolts for the coil former. This arrangement ensures a rigid mechanical construction.

The construction of the first i.f. transformer can be seen from Fig. 3. The end cheeks and the coil formers are held in position by nuts on two 6 B.A. threaded rods which are used to fasten the assembly

to the chassis. In this way the assembly is mounted independently of the screening can and the latter can be removed without dismantling the assembly.

The end cheeks are of sheet paxolin, 1.4 in square, the corners being clipped to clear the screening cans. A centre hole ¼ in diameter is drilled in each cheek to permit insertion of a trimming tool for tuning. The lead-out wires are supported at the end cheeks in four holes drilled at the corners of a square of 0.7-in side. The holes are bushed with eyelets in which the wires are soldered; the eyelets are of a type readily available for other purposes and can be obtained from leather and handicraft shops. Various other methods of securing the lead-out wires were tried but found unsatisfactory.

Both primary and secondary windings comprise 24 turns of 40 s.w.g. enamelled copper wire, close wound, the windings being positioned on adjacent ends of the formers so that they are separated by a distance of 0.4 in. Each winding is tuned by a fixed capacitor of 10 pF which for convenience is soldered to the lead-out wires at the eyelets in the adjacent end cheek.

As shown in the illustrations the assembly of the second i.f. transformer (detector unit) is similar to that of the first, employing 6 B.A. threaded rods to support the coil formers and end cheeks. A third paxolin panel is used in this assembly between the two formers, to provide additional anchoring points. Allowance must be made for the thickness of this panel when winding the coils to obtain the required 0.5-in spacing between adjacent ends of the primary and secondary windings. The two end cheeks are similar to those of the first i.f. transformer in dimensions, and drilling, but the top cheek has two extra eyeletted holes 1.1 inches apart arranged symmetrically about the centre and lying on a line at right angles to that passing through the threaded rods. The centre cheek is similar to the top one but does not require the large centre hole. The bottom cheek is similar to the top also but only one of the additional eyeletted holes is required.

The primary winding comprises 24 turns of 40 s.w.g. enamelled copper wire close wound and enclosed between layers of plastic adhesive-tape. The winding is tuned by the 10-pF capacitor soldered to the lead-out wires at the eyelets in the top end cheek. The tertiary winding is wound over the upper end of the primary winding, on top of the plastic tape, and consists of 4½ turns of 40 s.w.g. close wound. One end of this winding is brought out to the upper end of a 47-ohm resistor situated between the lead-out wires of the primary winding; the other end of the winding is soldered to the eyelet on the opposite

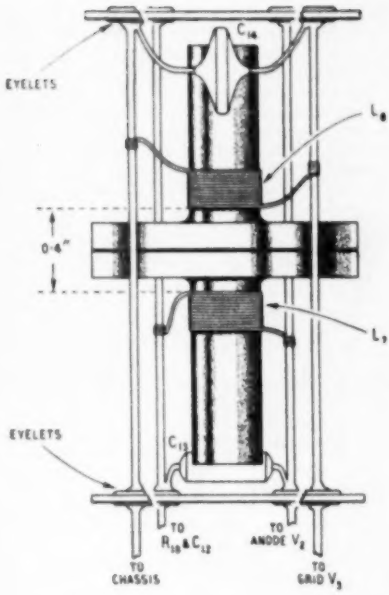

Fig. 3. Details of first i.f. transformer assembly.

Fig. 4. Constructional details of the detector unit (a) as seen from panel (b) as seen from back of set.

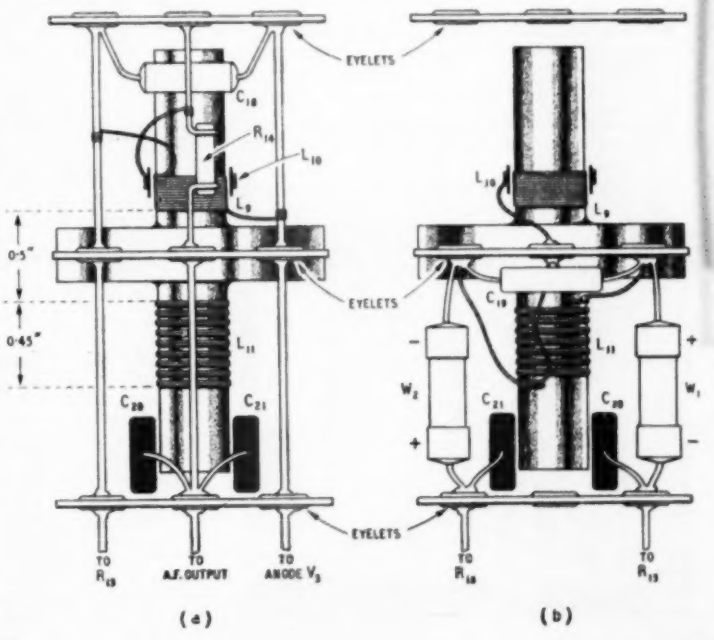

side of the centre panel. It is important that the tertiary winding is wound over the " cold " end of the primary winding and care should be taken to ensure that the upper end of the primary winding is taken to h.t.

The secondary winding is of bifilar construction each section consisting of 9 turns of 32 s.w.g. enamelled copper wire enclosed between layers of plastic adhesive tape. The length of this double winding is 0.45 in which necessitates the turns being spaced. Care should be taken, however, to ensure that the two windings are in close proximity to each other throughout their length. The secondary centre tap is obtained by connecting one end of one of the bifilar windings to the opposite end of the other; these two ends are soldered to the eyelet in the centre paxolin panel to which one end of the tertiary winding is soldered. The remaining two ends of the bifilar windings are soldered to the remaining eyelets in the centre panel. These eyelets also anchor the lead-out wires of the crystals and the 35-pF secondary tuning capacitor. The two capacitors C_{20} and C_{21} are also mounted inside the detector unit; one lead from each capacitor is soldered in the eyelets in the bottom end cheek to which the crystals are also soldered. The remaining capacitor leads are soldered to the vertical wire situated between the leads to the primary winding; this wire is soldered in an eyelet on the centre panel with the 47-ohm resistor. The lower end projects through the bottom end cheek and carries the a.f. output from the detector unit. The capacitor C_{22} is connected to this output lead outside the detector unit. Details of this unit are given in Fig. 4.

Fig. 5. Thermal shunt made from a crocodile clip as explained in the text.

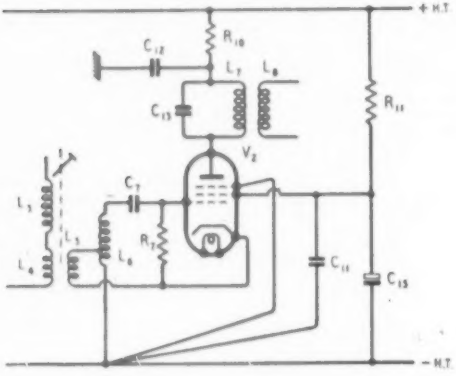

Fig. 6. An alternative frequency changer circuit to that shown in Fig. 1 (Part I) enabling several components to be omitted.

Arrangement of the components comprising the detector unit. The annotation enables them to be identified from the circuit diagram.

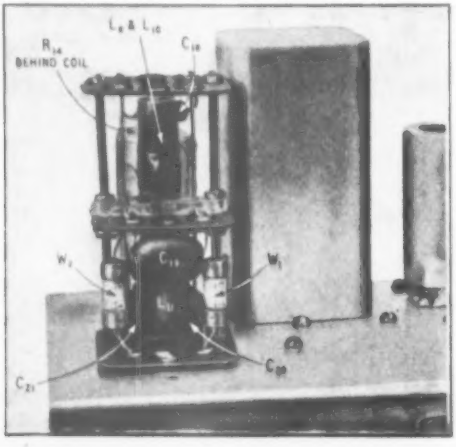

Care should be taken in soldering the crystal end-wires because crystals are very prone to damage by heat; a thermal shunt should be placed on the wires when these are being soldered. A pair of point-nosed pliers can be used to grip the wires during soldering but a better method is to employ a thermal shunt made by soldering two strips of copper to the jaws of a crocodile clip as shown in Fig. 5. The shunt is clipped over the crystal end-wire, which is soldered as quickly as possible, and allowed to remain in position until the joint has cooled.

If a diode valve is used in place of the crystals the wiring of the second i.f. transformer is slightly different. The two eyelets between which each crystal is soldered carry a lead-out wire, one of which goes to the anode of one diode and the other to the cathode of the other diode. The capacitors C_{20} and C_{21} must be mounted outside the transformer because they are connected to the diode electrodes.

Since Part I of this article was written, it has been found that certain components in the frequency-changer circuit can be omitted without effect on the performance of the unit. Primarily, the change comprises the omission of R_8 and C_8. R_8 was originally included to carry the d.c. cathode current of V_2 and C_8 was a blocking capacitor. However, it is quite permissible to omit C_8 and permit the d.c. to return to earth via L_5 and L_6. R_8 is then redundant. As a consequence the d.c. cathode potential of V_2 is zero with respect to earth, and the suppressor grid can be connected directly to the earth tag, R_9 and C_{10} being no longer necessary. The revised frequency changer circuit is shown in Fig. 6.

Alignment Procedure.—The unit should be switched on for at least 10 minutes before any alignment is attempted. Connect a voltmeter across the capacitor C_{22}. Ideally the meter should have a high impedance but a meter of 1,000 ohms per volt set to the 10-volt range can be used. Connect a signal generator output between the grid of V_2 and earth, and set the generator frequency as accurately as possible to 10.7 Mc/s and the output to approximately 50 mV. With a trimming tool adjust the two dust-iron cores of the detector unit for maximum meter reading. Transfer the meter to between the junction of R_{14} and C_{22} and earth; then re-adjust the core of the secondary winding to give zero output.



Fig. 7. Balanced-to-unbalanced coupling to the dipole for a coaxial feeder.

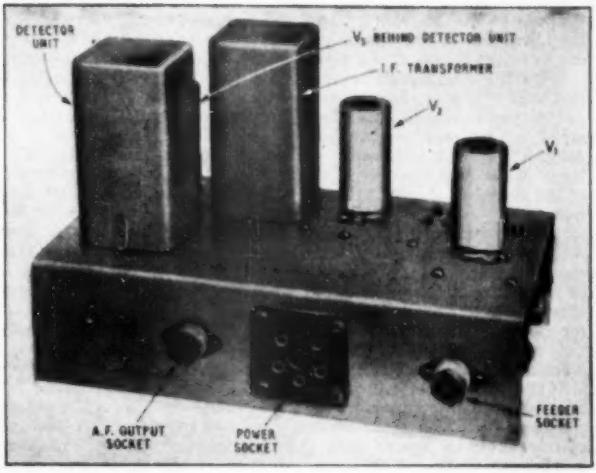

View of the receiver from the back showing input and output sockets, also power supply entry.

Reconnect the meter across C_{21} and re-adjust the slug of the primary winding for maximum output; only a very small readjustment should be necessary.

Connect the signal generator output between the anode of V_1 and earth, a blocking capacitor being used to prevent short-circuiting the h.t. supply; the capacitance of the blocking capacitor is not critical and 0.001 μF is suitable. The signal generator should be set to give approximately 500μV and the two cores of the first i.f. transformer are adjusted for maximum meter reading.

Two methods of aligning the oscillator and r.f. coils are possible. If the signal generator covers the range 80-100 Mc/s (either directly or on harmonics) connect it between the aerial input and earth and set the frequency to 87.5 Mc/s with an output of 500 μV. With the receiver oscillator tuning capacitor set to maximum capacitance adjust the oscillator coil dust-iron core to give maximum reading on the meter. If a meter reading is obtained at two positions of the core, that corresponding to the greater inductance should be taken. If the generator is amplitude-modulated, it should be possible to hear the modulation tone as the signal is tuned in. Check that the upper end of the band is approximately 100 Mc/s. If the tuning range is less than 87.5-100 Mc/s, the capacitance of C_9 should be increased; if greater, the value of C_9 should be reduced. If C_9 has to be changed, re-alignment at 87.5 Mc/s is imperative before the coverage is again measured.

If a signal generator is not available, it should be possible in south-east England to align the oscillator on the signal from Wrotham. For this purpose a dipole resonating at receiver mid-band (approximately 94 Mc/s) should be connected to the receiver and the tuning capacitor set at approximately half maximum capacitance. The oscillator core should now be adjusted until signals from the Wrotham transmitter are heard. Two signals should be received, an a.m. transmission on 93.8 Mc/s and the f.m. transmission on 91.4 Mc/s. As the feeder unit is designed for f.m. reception the a.m. signal will sound badly distorted. The correct core setting is mid-way between the two points of tune.

It is possible for either or both transmissions to be received at two tuning points, and in the event of this happening, the correct tuning point is that requiring the greater inductance.

When the oscillator has been aligned, the aerial inductance should be adjusted to give maximum output on the a.m. transmission, the frequency of which lies almost at the centre of the band covered by the receiver. To avoid mistuning errors due to a.g.c. action, the a.g.c. lead should be disconnected from C_{23} and earthed. This may not be advisable if the receiver is used in an area near Wrotham and where the voltage across C_{23} exceeds approximately 50 volts without a.g.c. In such circumstances the tuning capacitor can be mistuned to reduce the output across C_{25} to, say 1 volt from the a.m. signal. Alignment can then be carried out as before.

Tuning of the r.f. anode circuit is slightly more difficult because movement of the iron core causes slight mistuning of the oscillator. A.g.c. should be disconnected and the core position adjusted for maximum output from the a.m. transmission measured on a meter connected across C_{25}, the oscillator being returned after each core adjustment to keep the signal accurately in tune. In areas of high field strength there will generally be sufficient output to operate the meter even when the aerial is disconnected; the removal of the aerial is advisable to protect the crystals from possible overload.

It should be noted that at certain positions of the r.f. anode coil dust-iron core, the oscillator may cease to oscillate, due to absorption effects. When the core is correctly positioned, the oscillator will work normally over the whole band.

In order to make adjustments for maximum a.m. rejection, the receiver should be tuned to the a.m. transmission, and the values of R_{15} and R_{16} varied until minimum output is obtained. It should be remembered that the sum of the values of the two resistors should be kept constant at 2.5 kΩ throughout.

Aerials.—The length of the dipole for mid-band frequency is 5 ft overall and a single dipole of this type is generally satisfactory for covering the whole band. The Wrotham transmissions are horizontally polarised and consequently the dipole should be mounted in the horizontal plane. In this position, its polar

diagram in the horizontal plane is a figure-of-eight, the direction of maximum pick-up being at right angles to the length of the dipole.

With the unbalanced input of the type used in this unit it is generally desirable although not essential, to use a balanced-to-unbalanced coupling at the aerial. This may be constructed quite simply by using a $\lambda/4$ section of feeder connected between the inner of the feeder proper at the aerial and the outer of the feeder as shown in Fig. 7. This arrangement makes the unbalanced feeder appear as a balance feeder to the aerial. It should be noted that the $\lambda/4$ balancing length of feeder is $\lambda/4$ measured in electrical length, and not physical length. The ratio of the physical length to the electrical length is determined by the "velocity factor" of the feeder; for most solid dielectric 70-ohm feeders the ratio is in the region of 0.67. The physical length of the balancing section should thus be approximately 1 ft 8 in.

If additional aerial gain and directivity are required, a reflector and/or directors may be used. For a reflector, the length of the element should be approximately 5 ft 3 in, spaced at a distance of 2 ft 6½ in behind the dipole. If a director is used, a suitable length is 4 ft 9in, spaced at a distance of 13 in. in front of the dipole. For additional directivity a second director, of the same dimensions and spacing may be placed in front of the first. It should be noted that the impedance of the aerial will be reduced appreciably by the presence of such elements, and the position of the aerial coupling coil may need adjustment. This can be done by varying the coil position until maximum output is obtained. It should also be noted that the bandwidth of the aerial decreases as the number of aerial elements increases, and it may be found advisable to use a folded dipole. The impedance of a folded dipole composed of two similar thin elements in free space is 320 ohms approximately; it is especially suitable for use in arrays, where the presence of the other elements lowers its impedance to a convenient value.

Performance.—It is difficult to give precise sensitivity figures for the unit because of the effects of a.g.c., and because the unit does not incorporate a.f. stages from which the usual reference output of 50 mW output could be taken. The sensitivity, however, is such that an input signal of 50 μV at mid-band frequency produces a d.c. output of 1 volt at the discriminator. In terms of a.f. output, 1 volt discriminator d.c. output corresponds to a peak audio output of 0.35 volt at 100 per cent modulation, i.e., 75 kc/s deviation. The gain is progressively reduced for larger input signals and in practice the d.c. output will not exceed 10 volts, with a corresponding peak a.f. output of 3.5 volts. The sensitivity of the receiver falls off by about 6 db at both ends of the band.

The stability of the oscillator has been checked by running the unit for long periods and after the first ten minutes, the drift was not sufficient to be troublesome.

Correction.—In the list of parts in Part 1 the capacitors C_{11} and C_{28} were given as 0.001μF whereas the correct values are 0.01μF. Holes for adjustment of the dust cores in L_4 and L_9 must be drilled in the top of the two i.f. transformer cans.

Phase-angle Ellipse

MOST textbooks which deal with the cathode-ray oscilloscope show a diagram of the ellipse which is obtained when equal voltages of the same frequency but differing in phase are applied to the *x*- and *y*-plates. Most of them also show how the phase difference can be computed from measurements taken from the screen of the tube. Usually a diagram like Fig. 1 is given and it is stated that the phase difference is

$$\theta = \sin^{-1}\frac{A}{B}$$

While this is correct, it is quite difficult to measure A and B with any accuracy because the reference axes shown in Fig. 1 do not normally appear on the tube.



Fig. 1



Fig. 2

Fig. 1 shows a method of defining an ellipse by measurements from its centre, while Fig. 2 illustrates a simple way involving only the major and minor axes.

A graticule must be used and its reference centre must coincide with the centre of the ellipse.

It does not appear to be generally known that the phase angle can be computed equally easily from measurements of the major and minor axes of the ellipse. These can be taken off the tube face much more easily and accurately, for they are merely the distances C and D in Fig. 2. The phase angle is then

$$\theta = 2\tan^{-1}\frac{D}{C}$$

and for small angles this reduces to $\theta \approx 2\,D/C$ radians or 114.6 D/C degrees.

The formula is simply derived. The *x*-deflection is proportional to $\sin \omega t$, say, and the *y*-deflection to $\sin(\omega t + \theta)$. The distance z of any point on the ellipse from the centre is

$$z = \sqrt{[\sin^2 \omega t + \sin^2(\omega t + \theta)]}$$

By differentiating and equating to zero it can be found that the values $\omega t = -\theta/2$ and $\omega t = \pi/2 - \theta/2$ correspond to z_{min} and z_{max}, which are each respectively one-half of the minor and major axes, D and C, of the ellipse. For these values of ωt

$$z_{min} = \sqrt{2}\sin\theta/2$$
$$z_{max} = \sqrt{2}\cos\theta/2$$

whence $$\frac{z_{min}}{z_{max}} = \frac{D}{C} = \tan\frac{\theta}{2}$$

W. T. C.

EDISWAN

CLIX

By adding the Clix range of radio, television and electronic components to its existing list of products The Edison Swan Electric Co., Ltd. is able to offer an improved components service to the radio industry. Future enquiries and orders for these products, and others in the Ediswan range, will be welcomed.

United for better Radio, Television & Electronic component service

THE EDISON SWAN ELECTRIC COMPANY LIMITED

155 Charing Cross Road, London, W.C.2, and branches

Member of the A.E.I. Group of Companies

TRUVOX

It Pays As You Earn!

EQUIPMENT

Profitable P.A. business is built upon a reputation for reliability which can only be based on the dependability of your equipment. That is why it pays to use only TRUVOX, the reproducers that have had reliability built into them for a quarter of a century.

TRUVOX PRESSURE TYPE DRIVING UNITS

Senior and Junior models have a power handling capacity of 15 and 10 watts respectively and provide a substantially linear response from 175 to 10,000 c.p.s. The Senior model is available with built-in tropicalised multi-ratio transformer, a noteworthy feature much appreciated by sound engineers.

TRUVOX REFLEX SPEAKERS

Senior models give a substantially linear response from 250 to 8,000 c.p.s. with a peak handling capacity of 8 to 10 watts whilst Junior models range from 350 to 8,000 c.p.s. with 6 to 8 watts peak handling capacity and Minor models from 400 to 9,000 c.p.s. with a handling capacity of 3 watts. Either can be supplied with built-in transformer. Completely weatherproofed and designed to withstand prolonged exposure and vibration.

For Full Details Write to:

ROLA CELESTION LTD., FERRY WORKS, SUMMER ROAD, THAMES DITTON, SURREY

'Phone: Emberbrook 3402-6.

Wholesale enquiries to—Truvox Ltd., Exhibition Grounds, Wembley, Middx. (WEM 1212)

SHORTAGE OF RADIO & T/V ENGINEERS

The demand of Industry for our trained students is still greater than we can supply —and is likely to remain so for many years.

We offer:

FULL TIME DAY COURSE

1 year course in Principles and Practice of Radio and Television.

Next Course commences 14th April, 1953.

Write for FREE BROCHURES giving details of the above, of our 3-year course, and of others.

E.M.I. INSTITUTES—the only college which is part of a great industry.

E.M.I. INSTITUTES

(DEPT. 16A), 10, PEMBRIDGE SQUARE, LONDON, W.2. TEL.: BAYSWATER 5131/2

Associated with "H.M.V." MARCONIPHONE COLUMBIA ETC

I.A.16

MODERN PRACTICAL RADIO AND TELEVISION

Modern Practical Radio and Television is quite different from anything else of its kind. It is not too advanced for the enthusiastic amateur to master, and it is a boon for any expert. It is, in fact, crammed from cover to cover with a wealth of general and specialized knowledge—knowledge that everyone interested in Radio and Television should have, ready at their finger tips. Supplied with *Modern Practical Radio and Television* there is a separate booklet, bound to match, which gives details of 48 circuits of popular models and a mass of useful formulæ and data.

SOME OF THE CONTENTS

Briefly, the contents include: Sound, Waves in Free Space, Electricity, Magnetism and Inductance, Capacity, Reactance and Impedance, Alternating Current, The Tuned Circuit, The Principles of the Thermionic Valve, The Signal Analysed, Detection, Design of the Super heterodyne, Practical Coil Design, Switches and Switching, Loudspeakers, The Gramophone Pick-up, Circuits Analysed, Local Interference, Fault:-Finding Procedure, etc., etc.

THE ILLUSTRATIONS

The book is lavishly illustrated with 16 full-page plates in half-tone and 406 diagrams in the text.

SEND FOR FREE PARTICULARS

To The Caxton Publishing Co., Ltd., 42 Morley Hall, St. George St., Hanover Sq., London, W.1.

Please send me, free of charge, particulars of "Modern Practical Radio and Television" together with your terms of easy payment.

Name .....

(Send this form in unsealed envelope 1½d. stamp)

Address .....

RT10 .....

European V.H.F. Broadcasting

Summary of the Recent Stockholm Conference

THE use of very high frequencies for broadcasting and television on any appreciable scale in Europe being a comparatively recent development the Stockholm Conference, to which brief reference was made last month, was faced with many new problems. Before dealing briefly with these problems and their solution, some reference should be made to the genesis of the Conference.

At a meeting of Study Group XI of the International Radio Consultative Committee (C.C.I.R.) held in London in May, 1950, to discuss questions of television technique, the Swedish representative suggested that the time was rapidly approaching when the European countries should draw up a plan for the assignment of frequencies to their v.h.f. sound and television broadcasting stations. A number of other countries shared this opinion—believing, no doubt, that the time to make a frequency plan is before there are large numbers of working stations to complicate the problem—and in due course Sweden invited the countries of the European Broadcasting Area to a conference in Stockholm on 28th May for the assignment to European television and broadcasting services of frequencies in the broadcasting bands between 41 and 216 Mc/s. The bands in question are 41-68Mc/s (Band I), 87.5-100 Mc/s (Band II) and 174-216 Mc/s (Band III).

The Conference finished on the 30th June after preparing an agreement with which are associated three plans, one for each band. The administrations of 31 countries were represented and the agreement was signed on behalf of 21 of them, the non-signatories being Portugal, the U.S.S.R., and eight other Eastern European countries. The plans will come into force on the 1st July, 1953.

Basic Considerations

With one exception the Stockholm plans are based on the use of Bands I and III for television and Band II for sound broadcasting; the exception being that the U.S.S.R. and other Eastern European countries may use the 57-68 Mc/s portion of Band I for sound broadcasting. The Conference's basic task was, of course, to assign the frequencies in these bands so that each station could operate without interference from any of the other stations in the plan. Before this could be tackled it was necessary to decide:—

(*a*) what propagation data should be used to estimate the field strength of the interfering signal that the stations would lay down at various distances;

(*b*) what ratio of wanted to unwanted signal (called the protection ratio) should be used as a basis for planning (i) when the unwanted signal is on the same frequency as the wanted one, (ii) when it is on an adjacent frequency;

(*c*) what value of field strength of the wanted signal should be protected; and

(*d*) what should be the separation between adjacent frequencies.

Question (*c*) may require some explanation. Having decided what are reasonable values for the protection ratios it is necessary to decide which field strength contour of the wanted signal they should be related to. This is normally of the order of the lowest field strength that will give a useful signal, since if a higher value is selected the effective service area may be reduced by interference, while if a lower one is chosen the distance that must separate the wanted and unwanted stations is increased unnecessarily, and the number of stations that can be accommodated within the available frequency bands therefore reduced

These questions are common to all frequency assignment planning but they created some special problems for the Stockholm Conference.

Polarization and Propagation

The study group of the C.C.I.R. concerned with tropospheric propagation met in Stockholm immediately before the Conference and prepared a series of curves showing, for a given radiated power, the field strength exceeded for specified percentages of the time as a function of distance. These curves, which were based largely on experimental data obtained in the United Kindom by the D.S.I.R., B.B.C. and G.P.O., were adopted by the Conference.

The United Kingdom had proposed, as a result of studies made by the B.B.C., that when an interfering transmission was polarized at right angles to a wanted transmission an additional protection of 10 db could be assumed. Although this proposal was not formally adopted it was generally accepted and used in the preparation of plans.

The answers to questions (*b*), (*c*) and (*d*) for sound broadcasting depend on the type of modulation employed and to some extent on the characteristics of the receivers used. All countries announced their intention to use f.m. with the exception of Belgium and the United Kingdom, who reserved the right to decide later whether to use a.m. or f.m. There was general agreement to a maximum modulation frequency of 15 kc/s and for f.m. systems a maximum deviation of ±75 kc/s and a pre-emphasis time constant of 50 microseconds were generally favoured.

The Conference considered the questions in relation to both systems of modulation and reached the conclusions tabulated below.

It is worth recording that the figures are in complete agreement with those put forward by the United

	Ratio of wanted to unwanted signal for transmissions on the same frequency*	Field-strength to be protected
A.M.	30db†	1500μV/metre
F.M.	20db	250μV/metre

* This ratio to be equalled or exceeded for 99% of the time.

† Assumes that the frequency difference between wanted and unwanted signals is less than 250 c/s.

Kingdom which had been derived from extensive tests made by the B.B.C. and G.P.O.

There was no general agreement on the protection ratios required when the unwanted signal was on a frequency different from that of the wanted signal. In this case the ratios are largely dependent on receiver characteristics and there was some divergence of opinion on what limits could be economically realized in commercial sets. For similar reasons there were different views on what the frequency spacing between adjacent channels should be, and agreement on a standard spacing was not reached. It was, in fact, considered unnecessary to adopt any standard channel spacing but in making a plan to provide the protection ratio appropriate to the frequency separation of wanted and unwanted signals for the type of receiver to be used.

Problems of Television Channel Widths

The problem in Bands I and III was complicated enormously by the fact that there are in Western Europe three different television standards; the British 405-line system, the 625-line system used by most Continental countries, and the French 819 lines, using channel bandwidths of 5, 7 and 13.15 Mc/s respectively. The problem was still further complicated by the proposals of some Eastern European countries to use 625 lines with an 8-Mc/s channel bandwidth and parts of Band I for sound broadcasting; by the Belgian proposal to use the 819-line and the 625-line systems in a 7-Mc/s channel bandwith with a.m. sound for both systems; and by the French plan to use a *tête-bêche** channelling system.

The Conference therefore had to consider both the field-strengths to be protected for each system and the protection ratios required by each system for interfering transmissions of different types, both sound and vision, for a wide range of carrier frequency spacing of wanted and unwanted signals. It was very considerably helped in studying these problems by the fact that Study Group XI (Television) of the C.C.I.R. had met in Stockholm immediately before the Conference and had already explored the ground very thoroughly. It is not possible to give the findings of this Study Group in detail but the following were among the more important recommendations made:

For television transmissions on the same channel with carrier frequency spacings of less than 100 c/s a protection ratio of 45 db is necessary for at least 90 per cent and preferably 99 per cent of the time. When the carrier frequencies of the transmissions are "offset" by approximately $\frac{1}{2}$ or $\frac{1}{4}$ of the line frequency the protection ratio can be reduced to 27 db and 30 db respectively. The protection ratio required against the adjacent channel sound carrier was −6 db. It was, however, agreed that these ratios should be increased by some 5-6 db when the interfering signal was an a.m. sound transmission.

This Study Group made no recommendations on the field-strengths to be protected and the Conference was unable to reach any general agreement on this but it was accepted that for the 405-line system figures of 100 μV/m and 300 μV/m for Bands I and III, respectively, should be used, and that for both the 625 and 819 lines 500 μV/m and 1000 μV/m for Bands I and III, respectively, should apply. The U.S.S.R. and certain other Eastern European countries maintained a figure of 1000 μV/m for both bands.

In applying the conclusions of the Conference's Technical Committee to the preparation of the plans individual cases were considered on their merits and, in order to meet countries' requirements as fully as possible, some lowering of technical standards was sometimes made where it was acceptable to the countries concerned. Thus, while it was generally agreed that the distances between stations should be sufficient to ensure that the desired protection from interference was obtained for 99 per cent of the time there are some cases where by mutual agreement the actual distances in the plan are less than this. Considerable use was made of the possibilities of offset carrier operation and different polarizations to increase the number of workable assignments.

The plan for Band I provides for 185 television stations in Europe. So far as the United Kingdom is concerned we are allocated the five frequencies at present in use on which twelve stations may operate. It also includes 151 assignments for sound broadcasting stations in the U.S.S.R. and other Eastern European countries.

The plan for Band II includes nearly 2,000 assignments for sound broadcasting stations. As it has not yet been decided whether a.m. or f.m. will be used for v.h.f. sound broadcasting in the U.K., the plan includes, as alternatives, two sets of assignments for this country—one, providing for 109 a.m. stations, and the other, 79 f.m. transmitters. Both would provide for substantially complete coverage of the country with three programmes.

The plan for Band III includes 383 television assignments—28 of them for the United Kingdom.

Since the precise way in which v.h.f. sound and television broadcasting services will be developed in this country in Bands II and III has not yet been decided, the British delegation, in signing the agreement, entered a reservation which makes the signature effective only for Band I.

Permitted Variations of the Plans

V.H.F. sound and television broadcasting are such relatively new developments that many assignments in the Stockholm plans are tentative and although the plans as a whole are due to be reviewed not later than 1st July, 1957, there was a general feeling at the Conference that there should be a good measure of flexibility in the meantime. Accordingly the Agreement includes a clause which allows countries to change the powers, frequencies or other technical characteristics of their stations after obtaining the agreement of other countries likely to be affected by the change.

Although the Atlantic City Radio Regulations allocate Bands I, II and III for broadcasting in Europe generally, they include certain special provisions for individual European countries. Thus in the United Kingdom 95-100 Mc/s may be used for point-to-point and land-mobile communication services, 174-200 Mc/s for point-to-point communication and 200-216 Mc/s for aeronautical radio-navigation; non-broadcasting services are being operated in these bands at the present time. On the other hand France, whose 819-line television system requires a bandwidth of some 13 Mc/s per channel, is entitled to use the band 162-174 Mc/s for broadcasting as well as Band III, and the Stockholm plans include some 13 assignments for French television in this "extension band."

* In the "tête-bêche" arrangement, the full sidebands of adjacent channel transmissions substantially overlap and some economy in frequency usage is thus effected.

Projection Television
versus
Direct Viewing

[A note by R. C. Heath, chief electronic engineer of Peto Scott, who make both kinds of television receivers.]

IT is where the range of picture sizes that can be produced by either system overlap that direct-viewing and projection television receivers come into direct competition. It is felt that at the present stage of development there is no one technical feature which is so fundamentally good or bad in either system as to dictate which is superior and it must largely depend upon the taste of the individual viewer as to the type of receiver which gives him the most pleasing picture presentation.

Back projection pictures have the advantage of being completely flat and free from serious reflections of light from the screen. A reasonable standard of definition is obtained and the whole effect produced appears to be a well contrasted but soft and restful picture to watch. Although projection tubes and direct viewing tubes have a similar duration of life, eventually they will have to be replaced before the receiver as a whole becomes unusable due to deterioration by age. When replacing a projection tube there is marked advantage as it is much cheaper than a direct viewing tube giving an equivalent picture size.

The limitations of back projection appear to be mainly restricted viewing angle, especially in the horizontal direction, and that the controls require a little more skill to adjust the receiver to give the best possible results. Also, the viewing distance is more critical than with a similar sized direct viewing picture. Although the electronic equipment itself can be quite compact, as the cabinet has to accommodate the optical system and the appropriate throw distance for the picture, on the whole back projection sets tend to be rather larger than direct viewing sets, which is of course quite an important consideration for owners of small houses.

Modern direct viewing receivers are capable of showing very bright pictures, which undoubtedly impress the viewer initially, but may not suit all tastes for prolonged viewing. The receivers are capable of producing the full quality of definition transmitted by the B.B.C. without any limitations due to the screen texture or optical resolving power. With the use of "wide angle" tubes the direct viewing receiver, even for 17-inch pictures, may be made a very compact unit, and in fact it is possible to house a 17-inch rectangular tube and chassis in a cabinet a little larger than the standard 12-inch table model. One is not greatly restricted in the viewing angle, and the viewing distance is not critical, providing the viewer is not consciously worried by line structure.

The limitations of the receiver appear to be screen curvature, although this effect has been much reduced by the introduction of approximately flat-faced tubes, and owing to the glass surface of the viewing screen there is a possibility of reflections from incident light, which can be most disturbing and the receiver has to be orientated to prevent this effect. The contrast of the picture between black and white depends on the amount of incident light falling on the grey screen of the tube, but this can be improved by the use of neutral filters, but of course these filters have polished surfaces and there is still a possibility of reflection from the filter surface, as from the face of the tube as mentioned above.

All other features of a quality television picture are equal for either back projection or direct viewing. That is to say, equally good picture linearity, interference suppression, interlace, etc., may be obtained.

Therefore, one may draw the conclusion that, as the development of the two techniques stand to-day, and providing one is not influenced by cathode-ray replacement cost, the choice of a receiver depends greatly on the type of picture presentation which appeals to the individual viewer. There seems little doubt that in another decade or so all television techniques for producing medium and large-sized pictures will be some form of projection, but this is very much in the future.



for EVERY



amplification



requirement

Send for the latest catalogue and price lists containing complete details and specifications of the

New **range of**

TRIX

Quality

SOUND EQUIPMENT

THE TRIX ELECTRICAL CO. LTD.
1-5, Maple Place, Tottenham Ct. Rd., London, W.1. Phone: Museum 5817

AMPLIFIERS · MICROPHONES · LOUDSPEAKERS

RANDOM RADIATIONS

By "DIALLIST"

Good Show!

THIS YEAR'S RADIO SHOW was a good one, I thought. It was bright, attractive to the eye and full of interesting things. Excellent work was done by the control room in piping an almost continuous supply of sound and television programmes to the stands. It seemed to me, too, that most of the stands were better provided than they used to be with men capable of answering technical questions concerning the wares displayed. One incident on the pre-view day must go on record. Over the main entrance was a large notice to the effect that though the show was in theory open only to those bearing special tickets, members of the public prepared to pay 5s (double the fee for other days) would be admitted. Some, although surprisingly few, thought it worth while. Others wandered round the outside of the great building until they came to wide open doors (marked on the official map as exits) with never a soul guarding them. Through these the enterprising marched unchallenged. I heard one young man remark to the pretty little thing he was escorting: "This looks like being the best free five-bobsworth that's come our way!"

Is it Too Big?

How many, I wonder, will agree with an opinion that I formed on the pre-view day and retained unaltered in the course of subsequent visits? This was (and is) that the Radio Show has become too big. It is natural, I suppose, that as the radio industry expands, the exhibition of its products should grow larger and larger year by year. But it seems to me that it is now so enormous that anyone who tries to "do" the whole Show is bound to suffer from a severe attack of mental indigestion, unless he can manage to make several visits to it. I'm not at all sure that the best solution wouldn't be to group the stands in two separate and distinct areas of the hall. One would be devoted strictly to domestic broadcast receiving gear; the other, to electronic apparatus falling into other categories.

Navigational Aids Needed

It is just possible that the show *seems* larger than it is because it is now spread wide over the immense area of Earls Court, instead of being more compactly housed at Olympia. Yes, I really believe there's something in that. Not only is Earls Court very big; it is also (or so it seems to me) much more difficult to find one's way about there. There aren't so many landmarks to guide one's wanderings and the sign-posting is far from being as good as it might be. Here's a suggestion for an improvement. Name the "streets" (or avenues) in which the stands are placed after men famous for the parts they played in radio and television development—Clerk Maxwell, Hertz, Lodge, Marconi, de Forest, Baird, and so on. Let the names of the "streets" be displayed prominently at either end and at frequent intersections; every stand plainly numbered; and signposts at many intersections indicating the stands contained in the streets they serve and the restaurants, exits and so on to which each of these leads. It would be a whole lot easier than it is now to locate, say, Supermellow Radio, if you knew that its address was 17, Free Grid Avenue.

Resistor Colour Coding

SEVERAL READERS, to whom my best thanks, have been kind enough to send me "problem" colour-coded resistors. The subject of colour-coding was fully dealt with by D. F. Urquhart in the May, 1952, number of *Wireless World*. The system is now so widely adopted—by the Services, the R.I.C. and most, if not all, of the radio and electronic manufacturers' associations—that, whether we like it or not, we must regard it as having come to stay. Its weakest point is that a colour-band painted over another colour may be difficult to identify, no matter how good one's sight is. All of this will, no doubt, be set right in time. There is no doubt about the value of the coding system to those whom constant practice enables to read off values at a glance. But many of us do constructional work only at intervals and I know how we'd bless resistor manufacturers if they would also mark them in plain figures for our benefit.

A Diehard

WHILE TURNING OUT one of my workshop cupboards a week or two ago I came across an ancient Varley "dry" accumulator. It had certainly been there since the days before the war and it seemed that it must be ripe—over-ripe—for the dustbin. You can't see the innards of these things, for they have opaque cases. There had, however, been no horrid oozing from the vent and the terminals were clean and uncorroded. Might as well see, thought I, if there is life in the old dog yet. After giving it all the water it would take I put it on very slow charge (0.25A). Twenty-four hours later it was showing an e.m.f. of 1.9 volts under a load of 0.5A. Since then it has been charged and discharged

ASSOCIATED ILIFFE TECHNICAL BOOKS

"WIRELESS WORLD" PUBLICATIONS

	Net Price	By post
RADIO INTERFERENCE SUPPRESSION as Applied to Radio and Television Reception. G. L. Stephens, A.M.I.E.E. ...	10/6	10/11
BASIC MATHEMATICS FOR RADIO STUDENTS. F. M. Colebrook, B.Sc., D.I.C., A.C.G.I. 2nd Edition	10/6	10/10
SOUND RECORDING AND REPRODUCTION. J. W. Godfrey and S. W. Amos, B.Sc., A.M.I.E.E., in collaboration with the B.B.C. Engineering Division	30/-	30/8
MICROPHONES. By the Staff of the Engineering Training Dept. B.B.C.	15/-	15/5
ADVANCED THEORY OF WAVEGUIDES. L. Lewin.	30/-	30/7
FOUNDATIONS OF WIRELESS. M. G. Scroggie, B.Sc., M.I.E.E. 5th Edition	12/6	13/-
TELEVISION RECEIVING EQUIPMENT. W. T. Cocking, M.I.E.E. 3rd Edition	18/-	18/8
SHORT-WAVE RADIO AND THE IONOSPHERE. T. W. Bennington. 2nd Edition	10/6	10/10
WIRELESS SERVICING MANUAL. W. T. Cocking, M.I.E.E. 8th Edition	12/6	12/11
RADIO LABORATORY HANDBOOK. M. G. Scroggie, B.Sc., M.I.E.E. 5th Edition	15/-	15/5

A complete list of books is available on application.

Obtainable from all leading booksellers or from

ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1.

three times, "drinking" a total of about 2½ fluid ounces of water during the charging periods. I don't know its capacity, for the label has disappeared; but I put it at 10 ampere-hours. It is now showing well over 2 volts on open circuit after charging and 2 volts under a 0.45A load for an average of 18 hours.

Nasty Mess!

TALKING ABOUT ACCUMULATORS, have you ever seen the devastation that can be caused in a battery set by the disintegration of the plates of its mass-plate filament battery? I hadn't realized how serious it could be till I spent an evening with a friend shortly before this was written. At nine o'clock he switched on his battery set for the news. Nothing could have been more silent. "Can't be the accumulator," he said, "for I put in a freshly charged one yesterday." It *was* the accumulator; but not in the way he meant. When we took off the back of the set a queer sight met our eyes. All over the exposed metal parts were tell-tale green patches showing that dilute sulphuric acid had been at work. The vent of the accumulator had been stopped with a plug of glass wool and this had been blown out. The negative plate was in ruins. Between it and the positive plate lay a black mass of material, which had caused an internal short. When the short occurred the cell must have, so to speak, boiled over, flinging acid all over the interior of the set. We did what we could to prevent further corrosive action by using paint brushes to apply a strong solution of washing soda in water. I'm afraid, though, that the set is beyond first aid. The valves and some of the covered-in components have probably survived; but almost the whole of the wiring will have to be re-done. And, even if they seem sound now, not a few of the coils, resistors and so on would be liable to break down under the delayed effects of acid contamination, were they used again.

"Wireless World" Diary

IT IS HOPED the *W.W.* Diary for 1953 will be available from stationers and bookstalls towards the end of October. In addition to the diary pages—giving a week at an opening—there are 80 pages of reference matter including valve base tables, abacs, formulæ and circuits. In rexine the price (including purchase tax) is 4s 7d and in leather 6s 1½d. The prices for overseas readers are 3s 9d and 5s, respectively.

Pilot-Lamp-Holders

MST, MBC, MES, CES AND SES, TYPES



MINIATURE SINGLE TURN. These pilot-lamp-holders have special single-turn-thread socket, to accept M.E.S.-cap lamps. Silver-plated solder tags. Highest-grade insulation.

MINIATURE BAYONET CAP. Also known as Miniature Centre Contact. These holders conform accurately to the "B.9" addendum of B.S.52.

MINIATURE EDISON SCREW. Conforming to B.S.98, Section E.10, "M.E.S." with socket or shell acting as one pole. Fitted with resilient centre-contact leaf.



CANDELABRA EDISON SCREW. These New pilot-lamp-holders accept lamps with small-candelabra-cap which is standardised in Canada and U.S.A. and some other countries following their standards.



SMALL EDISON SCREW. Fitted with resilient centre-contact leaf. These and all other Bulgin pilot-lamp-holders can be supplied with a wide variety of mounting brackets.

A New addition to the range of Bulgin pilot-lamp-holders are these M.E.S., and M.B.C. moulded tropical type lamp-holders. Made of the finest grade materials to the usual superlative Bulgin quality.

FURTHER DETAILS IN CATALOGUE. REF. 190/WW PRICE 1/- POST FREE

MANUFACTURERS OF RADIO AND ELECTRONIC COMPONENTS

BULGIN *Components* A.F.BULGIN & CO.LTD BYE-PASS ROAD BARKING

UNBIASED

By FREE GRID

Physics and Philology

I WONDER if any of you nuclear physicists who dabble in subatomic particles can tell me how many known members there are at the present date of the great and growing "on" family? The electron, the proton and several other members of this family or club are well known to me, but nowadays new candidates seem to be put up and elected to membership at a rate almost equalling that attained within the chromium-plated portals of the "Hollywood ex-Husbands' Club."

In fact, I must confess that if the Editor were suddenly to call upon me to name all the present members of the "on" family I should have to hang my head in shame and return my *Wireless World* tie to him; at a risk of being adjudged guilty of *lèse-majesté*, I have sometimes thought that the Editor might have to forfeit his own *W.W.* tie if asked to pass the same test.

"Elementary, my dear Watson."

A writer in one of our photographic journals states that there are now a dozen members of the "on" club and seven would-be members on the waiting list having their credentials examined. Now, I never believe all I read (not even if it is written by myself) without very strong corroboration, and it is this or your earnest disputations about the matter that I am now seeking.

While on the subject, I should like to know, too, the real reason why the names of all the members of this family end in "on." The answer *seems* simple, namely, that it is because the name of the patriarch of the family, the electron, happens to end in "on." But we must not jump to hasty conclusions.

I have not forgotten that I, and many others more learned than me, once inclined to the view that the great "tron" family, to which belong the magnetron, the klystron and such great names as these, also came from the latter part of the word "electron." But, being far from sure about it, I put the question to you in these columns. The result was that an infinitely patient "Elementary, my dear Watson," coming from the Parnassian slopes of Witley (*W.W.*, April 1947, p. 150), showed me that I had been led astray by the red herring of a too-obvious clue.

It Isn't Cricket

A COUPLE of months ago I complained of the increasing misuse of the word "electronic" which threatens to become as much a fetish word as "dyne" did in the 'twenties. It was, in fact, so abused that it became a synonym for "circuit" and completely lost its original meaning.

A reader points out to me that the abuse of the word "electronic" is far more extensive than I had first thought, as he sends me an advertisement from an American magazine describing an electronic golf ball. Now, my motto has always been *audi alteram partem*, and I must, therefore, place it on record that, on the authority of a technical expert, I believe the use of the word has some justification in this case.

The expert points out to me that Scotland is the H.Q. of golf and that he can scarcely believe that the scientifically minded and thrifty folk up there would have overlooked the possibility of using modern technical principles for recovering and annexing other people's lost golf balls. It would be so easy to manufacture golf balls with a minute amount of radioactive material in them so that they could, when lost, be easily located with a Geiger counter in the still watches of the night.

If my expert friend's surmise be true, it would be only natural for the canny Scots to carry the idea across the Atlantic to the land where there are so many more players and, therefore, so many more potential losers of balls. I can only say that I have enough faith in my friend's knowledge of human nature to be writing these words from Scotland where, complete with kilt and Geiger counter, I am endeavouring to obtain evidence for the justification of this particular use of the word electronic.

Quite apart from any question of electronic golf balls, I have long thought that, with the present rapid development of guided-missile technique, we are on the eve of a revolution in the playing of ball games. It is not hard to visualize that by the time A.D. 2000 dawns such progress will have been made in the miniaturization of radio control gear that our children will witness an unscrupulous and unsportsmanlike attempt being made by England to recover the Ashes from Australia by means of guided cricket balls, and it will be of little use the old fogeys of that day shaking their heads and saying "It isn't cricket."

Searching for evidence.

Cavalcade of Coronation Radio

ALL of us who can proudly claim to have read *W.W.* with Micawber-like persistence since the first number appeared can also claim to have lived in six reigns. After next June we shall also be able to say that we have known four coronation days. It is true, of course, that forty-one years ago there may have been a handful of readers of the first number (April, 1911) who could also truthfully boast of having lived in six reigns and, if they survived the shock of the first three numbers, could claim to have known not four but five coronation days. If this is not clear to you it might be worth your while to consult a solicitor to see if there is any chance of your getting a refund of the money your parents spent on your education.

However, my real reason for talking of coronations was that I wanted to ask if any of you can say that to your personal knowledge radio has been used officially or unofficially in connection with all the coronations of the century. I am inclined to think it has played its part *officially* on all the three days concerned.

Everybody knows that broadcasting and television were used in 1937. In 1911, although there was no broadcasting, the receipt of news by ships at sea was commonplace. But was news of the 1902 coronation transmitted by wireless?

In the case of ships of the Royal Navy, I think it can hardly be questioned that radio was used for a special transmission. By immemorial custom the moment when the Crown is placed on the Sovereign's head is signalled from the Abbey so that a salute of guns can be fired at all points where Royal salutes are customarily made in this manner. Would not wireless have been used to signal this moment to all H.M. ships outside the range of visible or audible signals?

A RADICALLY NEW PRE-AMPLIFIER FOR LEAK 'POINT-ONE' POWER AMPLIFIERS

The

"Vari-Slope"

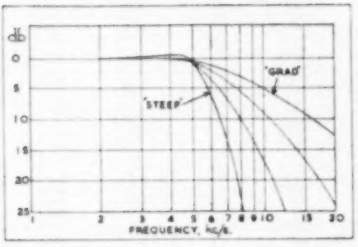

Frequency/amplitude curves for the "TREBLE—3" position (5 kc/s turnover). Curves of the same slopes are obtained on the other two positions turning over at 7 kc/s and 9 kc/s ("—2" and "—1" positions).

The filters consist essentially of twin-T resistor-capacitor networks inserted in the return circuit of a single-loop feedback amplifier. The more obvious advantages of this electronic feedback method over conventional choke filters include :—

(a) Improved transient response characteristics (due to absence of chokes having self-capacitance) and the consequent reduction of "ringing."

(b) Extremely low harmonic and intermodulation distortion due to negative voltage feedback action.

(c) No discontinuities in the rates of slope when the slope control is operated, and no change in signal level at frequencies below turnover. (Both these faults occur in variable-slope choke filters due to the slope control altering the terminating impedance and the insertion loss.)

(d) There are no chokes to cause magnetic hum pick-up.

(e) Smaller size, lighter weight, greater uniformity in production.

AUDIBLY BETTER REPRODUCTION

from unique

FEEDBACK CIRCUIT DEVELOPMENT

The new "Vari-Slope" pre-amplifier has a refinement which will doubtless set the pattern for future high-fidelity reproducing amplifiers. This advance consists of variable-slope "electronic" low-pass filters operating on negative voltage feedback principles.

No Inductors ("Chokes") are used, and all their disadvantages are completely eliminated. The turnover frequencies are 5kc/s, 7kc/s, and 9kc/s and the slopes of attenuation are continuously variable over the range 5db to 50db per octave.

PRICE **£12-12-0** LIST
IN BRITAIN

TO BRITISH USERS OF THE
RC/PA/U PRE-AMPLIFIER

Your old model can be rebuilt as a standard "VARI-SLOPE" at a charge of £8.8.0.

Orders will be booked in rotation.

Please do not send your pre-amplifier to us until we advise you of a date.

OVERSEAS USERS should contact their national agent regarding the availability of this rebuilding service, which is dependent on freight and reimport duties being reasonably low.

Write for "Vari-Slope" Leaflet

H. J. LEAK & CO., LTD., BRUNEL ROAD, WESTWAY FACTORY ESTATE, ACTON, W.3.

Phone : SHEpherds Bush 1173/4. Telegrams : Sinusoidal, Ealux, London. Cables : Sinusoidal, London.

VALVES *At Pre-Budget Prices*



Below is a list of B.V.A. and other Proprietary valves which we can supply at the pre-1951 Budget Price, i.e., only one third tax. We can of course supply most of the other types to complete the range but usually those not listed will have to be charged at the current rate of tax i.e., 66 per cent.

We give a very prompt insured C.O.D. service on valves and we shall be glad to execute your orders.

ACDD	DDT4	EF8	HVR2	MS PENB	PT41	TH4B	VPT4	1C1	6C8G	16P14	30C8
AC HFP	DDT13	EF9	HVR2A	MSP4	PT220	TH4	VP23	1C5GT	6C9	11D3	30L6
ACHL	DDT13M	EF9	HVU1	MSP41	PT25	TH13C	VP4	1C6	6C10	11D6	30T6
ACHLDD	DDT16	EF9	HW36L	MS4B	PV29	TH21C	VP4A	1C7G	6D1	12AL5	35
ACHLH	DD4	EF11	H2	MU4105	PV405	TH29	VP6C	1D5	6D8	12AT7	35KU
ACHPS	DD4D	EF12	H2HB	MVSPEN	PX4	TH30	VP13	1D5G	6D8	12AU6	55
ACP	DD13	EF13	H13	MVSPENB	PX25	TH30C	VP13A	1D6	6D6	12AU7	56
ACHE	DD14	EF22	H30	MVSPENY	PX230	TH41	VP13B	1D7G	6D6	12AX7	58
AC PEN	DD46	EF36	H21	MX40	PX25S6W.P	TH233	VP13C	1D8	6D7	12A6	80
ACPT PEN	DD41	EF37	H30	MHL13	PT30	TH2321	VP13K	1FD9	6D6	12A6	81BT
ACP1	DD101	EF39	H42	MHL13L	PT31	TH1	VP13X	1FW4A	6F1	12A8	81SPT
ACP4	DD207	EF41	H63	MM4105	PT705	TH2144	VP14	1F8	6F6	12A6	82BT
AC 90	DD220	EF42	H141D	N14	PT25	TP22	VP20	1F3	6F7	13J7	82DDT
ACSGVH	DD818	EF50	H210	N15	P2	TP23	VP23	1F5G	6F8	13K8	85TH
ACTH1	DD2530	EF54	IRV150/2005	N16	P81	TP25	VP28	1F6	6F13	13Q7	82VP
AC VH	DEH610	EF80	J240	N18	PL402F	TP26	VP41	1F7GH	6F13	13SA7	83KU
AC VP1	DET19	EF91	KBC32	N37	PZ15	TP220	VP41E	1G40	6F14	13SF5	87PT
ACO42	DE3	EF92	KCP30	N48	PZ25	TP230	VP50	1G6G	6F15	13SG7	71
ACO44	DF32	EH2	KF35	N77	PZ26A	TP1340	VP133	1H4G	6F16	13SJ7	71A
ACO64	DF51	EK3	KK32	N78	P425	TP2630	VP210	1H5GT	6G4	13SK7	75
ACS HL	DF91	EK32	KL1.5S	N142	P426	TS74	VP1130DD	1J6	6G6G	13SQ7	76
ACS PENDD	DF92	EK32	KL4	N146	P610	TT4	VP1320	1LA4	6H6	13SR7	77
ACS PEN	DF93S	EL2	KL32	N147	QP21	TT4A	VP1322	1LC6	6H7	12Z3	78
ACS PEN	DH2	EL3	KL35	N148	QP22B	TX21	VR1C	1LD5	6H6G	13D1	79
ACS PENDD	DH24	EL6	KTW61M	N150	QP25	T5	VW64	1LH4	6J5	13PGA	80
AC4100	DH63	EL11	KTW61	N155	QP40	T20	V9	1LN5	6J7	13SPA	82
AL60	DH73	EL32	KTW63	OC15L	QP230	T21	V20	1L4	6J8	13VPA	85
APP4A	DH76	EL33	KTW73	OD3	RB41	T22	V31E	1P10	6K5	14A7	84
APP4Aa	DH77	EL35	KTZ3	OM1	RB120	T41	V67E	1P11	6K6	15	85
APP4C	DH101	EL37	KTZ41	OM4	RF120	UAF41	VP14	1Q5GT	6K7	15A2	101
APP4E	DH147	EL41	KTZ63	OM5	RG250/1000	UAF42	V960	1R5	6K8	15D1	104V
APP6E	DH149	EL42	KT2	OM6	RX210	UBC41	V1007	1R5	6LD20	15D2	105
AP141	DH150	EL52	KT4	OM9	R2	UBF80	V5116	1S4	6LP3	15E	110
AEP4	DK32	EM1	KT5	OM10	R3	UBL21	WD40	1S5	6L6	17	115A
AR4101	DK91	EM4	KT24	6G6G	R6	UBL21H	WD142	1T4	6L6	18	117L7
ASL125	DL41	EM34	KT31	PA1	R10	UB41	W17	1T5	6L7	19	117N7
AS4120	DL510	EM35	KT32	PD220	R12	UCH21	W21	1U5	6L18	19BG6	117Z6
AS4125	DL2	EY51	KT33C	PD220A	R16	UCH42	W42	1V	6L19	20A1	120
AZ1	DL34M	EZ2	KT35	PD500I	R40	UF41	W76	2	6H6G	20C	124
AZ2	DL35	EZ35	KT36	PEN84	6D2	UF41	W77	2A3	6H7	20D1	150
AZ30	DL35	EZ40	KT41	PENDD1300	6D6	UFW29L	W81M	2A5	6P5	20D2	150A
A6E	DL63	EZ41	KT42	PENDD4030	6D20	UF42	W142	2A6	6P8	20P2	150B
A11D	DL74	EZ80	KT44	PENDD4020	6E2.11	UL41	W143	2A7	6Q7G	20P1	154V
A30B	DL92	FC2	KT45	PEN4DD	6E21C	UL44	W145	2A5	6L7GT	21A	164V
A32A	DL92	FC2A	KT61	PEN44VA	6G220	UL46	W147	2D2	6A7G	24	185BT
A27D	DL93	FC4	KT63	PEN23	6G2595W	UM34	W148	2D4A	6A7GT	24A	202DDT
A38C	DL94	FC13	KT66	PEN24	6G410	UN1-Ballast	W150	2D13	6F7	24E	203MPG
A40A	DL145	FC13C	KT71	PEN25	6FT4A	UR1C	X7	2D13A	6G07	24G	203STH
A50B	DL747	FC141	KT72	PEN30C	6P2	UR2	X17	2D13C	6H7	25A6G	203VP
A70D	DN41	FT104	KT74	PEN30C	6P2B	UR3	X22	2D17	6J7	25B5	203VPB
A2040c	DN143	FS8	KT76	PEN40DD	6P2D	UR3C	X24	2P	6K7	25L6	203THA
A40A	DP405	GH2	KT81	PEN44	6P4	UR18	X61	2TR215	6L7	25T5	210DDT
BLL32	DTU1	GT1C	KT230	PEN45	6P4B	UU3	X61M	2Z3	6N7	25Z5	210DG
BR202	DT215	GU1	KT263	PEN45DD	6P13	UU6	X65	3A4	6Q7	26	210HF
BTH80	DV80	GU51	KW32	PEN46	6P13C	UU7	X64	3D6	6S7	27	210HL
BVA42	DW30	GZ32	KZ32	PEN220	6P13S	UU8	X65	3S7	6S7G	27SU	210LF
BVA43	DG20	G34	K300	PEN220A	6P30	UU9	X66	3Q4	6T7G	28D7	210RC
BVA44	DG24	G4120	K30K	PEN231	6P32	UU30/250	X71	3Q5	6THSG	30	210VPA
BVA45	DG29	HD13	K33A	PEN383	6P41	UU41	X73	3V4	6U5G	31	210VPT
BVA47	D1	HD14	K33B	PEN428	6P42	UU60/250	X73M	3Y4	6U7G	32	215P
BVA48	D3	HD21	K50N	PEN45DD	6P45P	UX5	X76	4	6V6G	32E	215SG
BVA56	D15	HD24	K50M	PEN3500	6P61	UY1N	X76M	4D1	6V7	33	220PT
B2	D41	HFP13	K50N	PJ10	6P141	UY21	X78	4THA	6W5G	34	220P
B30	D42	HLA2	K52	PL33	6P181	UY31	X79	4TP5	6W7	35	220PA
B36	D43	HL DD1320	K70B	PL36	6P210	UY41	X81M	4T5A	6X5GT	35A5	220PT
CBL1	D63	HL5	K70D	PL38M	6P215	U4	X101	4TP5	6Y4	35C5	220TH
CBL31	D77	HL5 K	K80A	PL82	6P220	U5	X135	4T5A	6ZY5G	35L6GT	220VPB
CCH35	D92	HL4	K153	PM2A	6P1320	U14	X142	4T5P	6Z5	35Z3	220VS
CL4	D400	HL40	K404	PM2B	6P2220	U16	X143	4XP	7A5	35Z4	220VSG
CL33	D3507A	HL13 HL	LBE10	PM2HL	6QT4	U17	X145	4.100UB	7A3	35Z5	220JH
CP220	EAB1	HL13C	LD2	PM3	6S210	U18/20	X148	5	7A7E	36	224
CR54	EAF41	HL21	LD210	PM12	6U25	U21	X150	5U4	7A8	37	226DU
CY1C	EAF42	HL21DD	LG210	PM12M	6U61	U22	X410	5V4	7B6	38	230PEN
C1	EA50	HL23	LL2	PM14	6U215A	U24	Y13	5X4	7B8	39	230XP
C1C	EBC3	HL23	LL4	PM20	6W1	U25	Y63	5Y3	7B7	39/44	240QP
C1	EBC33	HL23DD	LP2	PM22A	6ZDD	U33	YB20	5Y4	7B8	40SUA	244V
C2	EBC41	HL41	LP220	PM22D	6AA	U35	ZD	5Z3B	7C5	41	250L4
C3S	EBF2	HL41DD	L1	PM22	6AV	U37	ZD2	5Z3	7C6	41MDG	301
C9	EBF11	HL42DD	L2	PM24A	6AVA	U38	ZD17	6A2	7C7E	41MH	302
C10	EBF80	HL45DD	L2DD	PM24M	S6	U71	Z14	6AC7	7D3	41MHL	302THA
C10B	EBL21	HL73C	L13	PM25	S22	U74	Z21	6AE5	7D5	41MLF	303
C30C	EBL31	HL133	L21DD	PM202	S130	U76	Z22	6AE6G	7D6	41MP	304
C30B	EB4	HL133DD	L30	PM202J	SB15VH	U78	Z62	6AF5G	7D8	41MPG	307A
C30B	EB34	HL510	L63	PPL4	S217	U81	Z65	6A06	7H7	41MSG	308
C36A	EB41	HL1320	L77	PP2	S410	U82	Z66	6AL5	7K7	41MDG	340
C36C	EB91	HPB13	L410	PP3/250	S410S	U101	Z77	6AM6	7Q7	41MTA	350BX
C36B	ECC31	HP13	ME22	PP3/400	S463S	U102	Z150	6A8	7R7	41MTL	402PENA
C63H	ECC32	HPE10	ME241	PP5/400	S1202	U145	OZ2G	6A6	7S7	41MTS	403BU
DAC1	ECC33	HPE11C	MK220	PP6B	TBC14	U147	OZ4	6A6	7T4	41MXP	410SPP
DAC32	ECC34	HPE11	MHD4	PP9C	TBL14	U149	O1A	6A7	8	415TH	410PT
DAF91	ECC35	HPE15	MHL4	PP9E	TBL46	U150	O1307N	6A8	8A1	42	415PG
DC HL	ECH2	HPL11S	MHL13	PP12A	TBC82	U251	1A4	6BA6	8D2	42A	415XP
DC/P	ECH3	HP2018	MH4	PP24	TB108	U403	1A4E	6BE6	8D6	42E	425PT
DC 90	ECH11	HP4100	MH41	PP35	TB122	U404	1A4G	6BG6	9A1	42MPT	434
DCH PEN	ECH21	HP4101	MH306	PP225	TB622	U801	1A5	6BJ6	9D2	42PTB	435P
DCH24VH	ECH35	HP4110C	MH1115	PP4110	TB5013	U814	1A5G	6BS6	10	43	435XP
DCH24	ECH42	HP4106	MH4103	PP2018	TP2620	U850	1A6	6BS	10C1	431U	484V
DCH4L	ECL80	HP4106C	MH4106	PP4118	TCH24	U4020	1BC1	6B7	10D1	44S	525
DDA13	EC8	HP4106G	MH4108	PT DD35DA	TDD8A	VMP4G	1B4E	6B8	10D2	45	607
DDL4	EC31	HP4108	MKT4	PT2	TDD13C	VM34	1B4 25S	6CD6	10F1	451U	646
DD-PEN	EC32	HP4115	ML4	PT4.4	TDD25	VM4K	1B7	6C6	10F2	45Z3	660
DDTB15	EC91	HR2	MP PEN	PT10	TE564	VO28	1B7G	6C6G	10F9	46	802
DDTB15S	EB50	HR35	MR1	PT24A	TP44	VO45	1B42	6C8	10LD11	48	807
DDT3	EF31	HR210	MS PEN	PT24/DAL	TR2	VO135	1B150	9G7	10P13	49A	955

Advertisement by Electronic Precision Equipment Ltd., see overleaf.

THE Elpreq "HANDY THREE"

A small self-contained set which can be carried about from place to place must be a valuable addition to your personal belongings. When the family want Television for instance, you may wish to hear a special Radio item, if you have a long job to do in your shed or greenhouse or even whilst having a bath, an important programme need not be missed. Cycling too can be made more enjoyable if you can listen to music and singing (of course under these conditions a loudspeaker would not be too successful but an earphone of the deaf-aid type is ideal).



Above Chassis.



Below Chassis

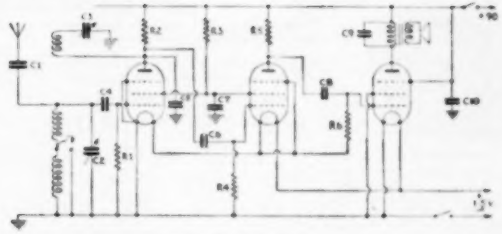

Theoretical Diagram.

The little set described here uses sub-miniature valves and can be built for only 70/- but it will receive long and medium waves at good strength with only a short throw out aerial. The circuit used i.e. single coil tuning with reaction is one which was very popular in the early kit set days. We have chosen this type of circuit because it works well with the miniature valves and does save the heavy cost of the midget 2-gang, I.F. transformers etc. which are necessary with a superhet. Also this set is much cheaper to run having only three valves and needing only 45 volts H.T. and 1½ volts L.T.

We give enough details on this page for most readers but a blueprint showing point to point wiring is available price 1/6.

Notes.

1. For L.T. use 1.5 v. Battery type U2.
2. For H.T. use 45 v. Ever Ready Battery B106.
3. In most areas a 15ft. aerial slung around the picture rail is plenty.
4. To receive the station adjust tuning and reaction controls together.
5. In weak reception areas try a longer aerial, an earth, and/or increase the H.T. to 90 v. i.e. Ever Ready battery B126.

Components, valves and prices.

Resistors.
R1, R3, R4—2.2 megohms.
R2, R5—560 k ohms.
R6—1 Megohm.
Total 6 available for 2/-.

Fixed condensers.
C1, C4, C6, C8—1,000pF.
C5—100 pfd.
C7—.1 mfd.
C9—.01 mfd.
C10—2 mfd.
Total 8 available for 2/-.

Variable Condensers.
C2—.0005 mfd.
C3—100 pfd.
Both available for 7/-.

Valves
V1, V2—CV443, 5/9 each.
V3—CV385 6/9 each.

Assembled Receiver.

Other components

Metal Chassis	2/6
Miniature Output transformer	4/6
Dual Wave Coil	3/6
3½in. Loudspeaker	12/6
On/Off switch	2/6
Knobs (2)	1/-
Cabinet	15/9
Sundries, nuts, bolts, battery, plugs, wire etc.	3/6

Special Offer
All above parts bought separately come to £3/17/-, but if you buy them all from us within 30 days we will supply the cabinet at 8/9 thereby reducing total cost of set to £3/10/-. Non callers add 2/- for postage.



Valve Connections.

Advertisement by Electronic Precision Equipment Ltd., see overleaf.

WITHOUT LAYING OUT TOO MANY OF THESE –
ALONG COMES THIS
GPO
AND WITH THE AID OF THESE –
YOU ASSEMBLE THIS
IN PLENTY OF TIME FOR THESE

With our world famous kits you do not make anything, you simply assemble standard components, and thus have a professional instrument at half price.

First satisfy yourself by sending for the data, if you think it is complicated return it within 14 days and we will refund your cash in full. Send for data (blueprints, etc.) today. MIDGET RADIO 1.6. T.V. 5/-. RADIOGRAM 2.6. TAPE RECORDER 5/-. Cabinets and all parts available separately—H.P. Terms if required.

TAX FREE

R.M. Extension Speaker in bakelite case with volume control. Price 49/6, but we shall have to pay Tax on future consignments so buy one while you have the chance.

TEMPERATURE CONTROLLED SOLDERING IRON

The Famous Biobar

A cancelled export shipment permits us to offer these at a little over half normal price. These irons have a built-in thermal device which permits quicker warming up, greater available heat for soldering on metal chassis, etc., no burning when idling and finally a saving of current as the wattage reduces when the iron reaches a critical temperature. 250 only available (standard pencil bit type). Please state voltage. Price 15/- plus 1/- post.

THE "ARGUS" TELEVISION RECEIVER

A 21 valve, 6in. C.R. Tube, Unit-built Televisor for the amateur. All components, tube and valves cost only £20/10/-. Constructors envelope giving full details and blueprints, 5/-, returnable if you think you can't make the set.

IDEAL XMAS PRESENT FOR MOTHER OR MARRIED SISTER

Buy now, we may not have any left at Christmas. Chrome plated clothes drier/room heater, dries and airs washing, towels, etc. Works off A.C. or D.C. mains—only 750 watts. Size 3ft. x 3ft. x 5in. Made to sell at £12/12/-. Price £4/19/6 plus 7/6 carriage.

SUB-MINIATURE COMPONENTS

Highly suitable for deaf aids, flying control, or other midget electronic equipment. All ex unused equipment.

Circuit diagram of Deaf-Aid using this equipment is available free on request to purchasers of the equipment.

SUB-MINIATURE VALVES—WIRE ENDED

Type	Fil. Volt	Heater Current	Suitability	Price
CV385	1.4 v.	25 mA	Output Pentode	5/9
CV387	1.4 v.	25 mA	Output Pentode	5/9
CV2106	1.4 v.	15 mA	Pentode	6/9
CV2107	0.75 v.	25 mA	Pentode	4/9
CV443	0.75 v.	25 mA	Pentode	4/9
CV386	0.75 v.	25 mA	Pentode	4/9

SUB-MINIATURE VOLUME CONTROLS

Type 1. 3 meg. with switch, probably the smallest control made, can be used with finger plate removed, control effected by an 8 B.A. screw. Price 4/9 each.



Type 2. Again 3 meg. with switch, this one is same size but cannot be used without the finger plate. Price 4/3.

OUTPUT MATCHING TRANSFORMERS

Ratio approximately 10 to 1 intended to match output of CV385 or CV387 into crystal earpiece. Price 4/6.

CRYSTAL EARPIECE

High sensitive, very light weight, complete with 1 yard of special P.V.C. covered tinsel flex and slide contacts. Price 8/6.

Ditto, but without flex or contact slide—note this makes excellent microphone. Price 6/6.

CRYSTAL MICROPHONE

Diaphragm driven, extremely sensitive, made for deaf aid but highly suitable for recorder work. 10/6 each.





HEARING AID CASE

Bakelite with lapel clip. Also makes excellent case for the above crystal microphone, which would be equal to any hand crystal microphone being advertised at 5 gns. Price 7/9.

4 CORE P.V.C. COVERED TINSEL FLEX LEADS

Suitable for L.T. and H.T.—length approximately 1 yard. Price 1/3 or complete with L.T. and H.T. battery plug. 3/9.

6-VOLT AMERICAN HEAVY-DUTY BATTERIES

Made by one or other of the most famous American battery companies. For reliability and long service between charges these are in a class of their own. Capacity rating is 140 amp-hour. We have a limited quantity of these batteries available, unused—in fact they have never been filled with acid, and the price is £5/10/-, carriage extra at cost depending upon your locality.

ELECTRICAL BARGAINS

In addition to our large range of radio accessories we also carry a good stock of electrical wiring accessories, details of a few of these and of cable can be found below :—

LAMP HOLDERS

Bakelite 1/- each or 10/6 doz.
Bakelite skirted Batten holder 1.6 or 15/- doz.
Bakelite type threaded for ½in. with HO skirt, 1.6.
Bakelite type threaded for ½in. with HO skirt, 2/-.
Bakelite type threaded for ½in. with switch and HO skirt, 3/6.

T.R.S. CABLES. 250 v. CLASS

1/.044 Twin flat	1/-
3/.029 Twin flat	1/4
3/.029 Twin with earth	1/8
3/.029 3 Core flat	2/-
3/.036 Twin flat	1/8
3/.036 Twin with earth	2/-
3/.036 3 core flat	2/8
7/.029 Twin flat	2/-
7/.029 Twin with earth	2/4
7/.036 Twin flat	2/9
7/.036 Twin with earth	3/3
7/.064 Twin flat	4/9

LEAD COVERED CABLES 250 v. CLASS

	yard
3/.029 3 core	2/3
3/.036 3 core	3/6
7/.044 twin	3/3
3/.036 twin	2/-
7/.029 twin	2/9
7/.064 twin	5/-

WAR EMERGENCY TYPE CABLES 250 v. CLASS

These are P.V.C. or rubber insulated, laid flat then braided with cotton and compounded :

	yard
7/.029 3-core flat	2/-
7/.044 twin flat	2/-
7/.064 twin flat	3/3

MULTICORED FLEXIBLES

All are suitable for mains work as the separate conductors are very well insulated, then they are covered overall either with hard rubber, plastic or waterproof braiding :—

	yard
10 core	2/6
7 core	2/-
5 core	1/-

M.E.M. SWITCH FUSES. All insulated, double pole 250 v. 10 amp 6/- each.



Hicraft 5-amp Surface Switch, bakelite, 1/6 each, 15/- doz.

5-amp 3-pin shuttered socket, brown bakelite, 1/3 each, 12/- doz.

Advertisement by Electronic Precision Equipment Ltd.



BATTERY ELIMINATOR

This is a vibrator type power pack which gives 150 volt at 50 m.A. of L.T. suitable for all dry sets from a 4 volt car or similar battery. Ex-W.D., of course. Price 29/6 plus 2/6 post and packing.

FLUORESCENT LIGHTING UNITS

40-watt Type. This is a combined condenser and choke unit for controlling fluorescent tubes. The only other item needed is a starter switch which can be an automatic type or an ordinary on/off manually operated type. We offer these well made units at less than half price, namely 19/6 each.

HIGH VOLTAGE VALVE HOLDERS

For four or five pin valves. Price 2/9 each.

TIP-UP CINEMA SEATS

Ideal for T.V. demonstration booths and also when vans are used for carrying passengers. Good condition, rubber cushion arm rest and sprung seats moquette covered.

Single Seat 30/-
Double Seat50/-
Treble Seat70/-.
Carriage 5/- per seat extra.

COMPASS EQUIPMENT

BC.433G. COMPASS RECEIVER.
MN.26C. COMPASS RECEIVER.
RA-10. RECEIVER.
MN.26Y. COMPASS RECEIVER.
1-82-A. INDICATOR.
IN.4A. LEFT-RIGHT INDICATOR.
1-81A. INDICATOR.
BC.434A. CONTROL BOX.
MR.9B. CONTROL BOX.
PU-16-AP. INVERTER.
BC.433G. CHASSIS ONLY.
MC.124. FLEXIBLE DRIVE.



BC.433G. COMPASS RECEIVER

PU-16-AP. INVERTER

MC.124. FLEXIBLE DRIVE

All unused, some in original cartons and cases, some uncased and externally storage soiled.

AMPLIFIER RACK

This stands approximately 6ft. high, and was made originally for the G.P.O. The top panel contains the amplifier proper, which consists of an A.C. mains-driven power pack, capable of delivering 200 mA. at 400 v. and, of course, the normal L.T. supplies, and the amplifier itself uses an MHL4 feeder and two PX25s in the output stage, giving approximately 25 watts. This top deck also contains the heavy duty output transformer. The lower panel contains the feeder unit which can be used as a pre-amplifier for microphone and gramophone work. You will observe that on the rack there is ample space for fitting a monitor speaker and an R.F. unit if same are required. Note that the anode current of the PX25 valve is monitored by a 2½in. flush meter. Further note that these amplifiers were made by the famous MARCONI company. Complete as illustrated but less valves, unused and only very slightly storage soiled. Price £7/10/- plus carriage at cost.

THIS MONTH'S SNIP
DECCA RADIO-GRAM UNITS



A special purchase enables us to offer the famous Decca Auto Record Changer, new and unused, at a little over half price. A superb instrument, plays standard 78 r.p.m. and 33 r.p.m. records, up to 10 of which, of mixed sizes can be loaded at one time. Ideal for modernising an old radiogram or for a new installation, has attractive modern finish and very conveniently located controls. Size 12½in. × 10½in. deep, clearance above board 5in., below board 3in. Each unit is complete with 2 Decca lightweight pick-ups. Special Price £11/10/- plus 7/6 carr. and Ins. Limited quantity so order immediately (small deposit secures).



EX-ROYAL NAVY SOUND POWERED TELEPHONE

These require no batteries, and will go for long periods without attention. Complete with generator and sounder which gives a high pitched note, easily heard above any other noise. Also fitted with an indicator lamp which in quiet situations can be used instead of the sounder, or where several 'phones are used together will indicate which one is being called. Size 7½in. × 9in. × 7½in., wall mounting, designed for ships' use, but equally suitable for home, office, warehouse, factory, garage, etc. Price 57/6 each, plus 4/6 carriage.

ADJUSTABLE THERMOSTAT

250 v. heavy silver contacts can be adjusted to operate between 70°—300° F. These are suitable for aquarium heaters, electric blankets, etc.
1 Amp. Model 3/6.
2 Amp Model 5/6. Post, etc., 6d. extra.

Don't be cold this winter, make an Electric Blanket, blueprint 1/6, post free.

AUTO TRANSFORMERS

For working American equipment off our mains, etc., etc. Input tapped 200-240 v. Output 115 v. In addition to those listed below, we have special this month: 150/200 watt totally enclosed in metal box with input and output leads. Price 47/6 plus 2/- post and packing.

Totally enclosed and screened	Price	Carr.
50 watt	£1/2.6	1/6
100 watt	£1/16/-	1/6
150 watt	£3/-/-	2/-
250 watt	£4/10/-	2/6
500 watt	£5/10/-	2/6
Unscreened		
1 KVA (1,000 w.)..	£6/10/-	5/-
1.5 KVA (1,500 w.)	£7/17/6	5/-
2 KVA (2,000 w.)..	£10/17/6	7/6
3 KVA (3,000 w.)..	£12/7/6	10/-
5 KVA (5,000 w.)..	£19/5/-	12/6

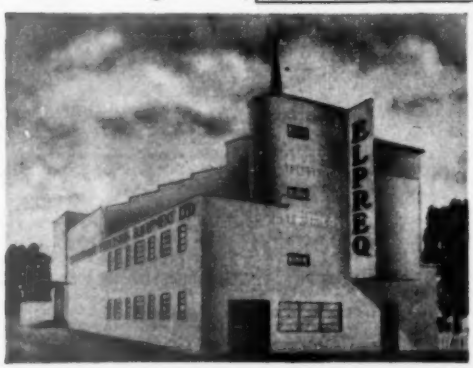

ELECTRONIC PRECISION EQUIPMENT LTD.

The building you see alongside is our new Mail Order Depot at Harrow. We have not been able to move in yet however due to delays over licences, etc. Therefore until further notice, please continue to address Post Orders to E.P.E. Ltd. (Dept. 2), Windmill Hill Ruislip, Middx. Also note, we are not giving up any of our shop premises, so personal shoppers please call at :—

42-46, WINDMILL HILL, RUISLIP, MIDDX.
(Half-day, Wednesday).

152-153, FLEET STREET, E.C.4.
(Half-day, Saturday).

LASKY'S RADIO
"World Renowned for Service & Reliability"

INDICATOR UNITS



TYPE 233. Contains 1 cathode ray tube type VCR97 and 11 valves: 3 EF50, 3 EB34, 3 SP61, 2 EA50. Also hundreds of various types of components, resistances, condensers, pot/meters, switches, etc., etc. Assembled on strong metal chassis, in grey enamel steel case. Size: 18 × 21 × 8in. **LASKY'S PRICE 89/6.** Carriage and packing 10/6 extra.

TYPE C.K. Contains 1 cathode ray tube type VCR97 and 8 valves: 3 EF50, 2 EB34, 1 CV18, 1 VT61. Hosts of assorted components, including resistances, condensers, 3 1-meg. carbon pot/meters, plugs, switches, etc., etc. Assembled on strong metal chassis in grey enamel steel case. Size: 18 × 21 × 8ins. **LASKY'S PRICE 69/6.** Carriage and packing 10/6 extra.

CONDENSERS

TUBULAR WAXED

500 v.w. .1, .01, .02, .05, .001, .002, .005, etc., etc. **6d.** each, 5/- doz.

MINIATURE MICA

100, 200, 300, 500 PF, etc. **6d.** each, 5/- doz.

CERAMIC AND SILVER MICA

All values from **4½d.** each, 4/- doz.

MINIATURE

.1, .01, .001, .02, .002 mfd. etc. **7½d.** each, **6/-** doz.

MINIATURE BIAS

10 mfd. 25 v.w., **10½d.** each, **9/-** doz.

ELECTROLYTICS

32 + 32 mfd. 350 v.w. and 25 mfd. 25 v.w. in single aluminium can. Latest fixing, **4/11** each.

32 + 100 mfd. 450 v.w. condensers, **7/6** each.

32 + 32 mfd. 450 w.v. **6/11** each.

16 + 16 mfd. 500 v.w. **4/6** each.

16 mfd. 500 v.w. **3/6** each

8 mfd. 450 v.w.	2/3
8 mfd. 500 v.w.	2/11
8 + 8 mfd. 450 v.w.	4/6
8 + 16 mfd. 500 v.w.	5/3
8 mfd. 350 v.w.	1/6
16 mfd. 350 v.w.	2/6
50 mfd. 12 v.w.	1/6
25 mfd. 25 v.w.	1/9
50 mfd. 50 v.w.	2/-
12 + 12 mfd. 350 v.w.	3/6
16 + 24 mfd. 450 v.w.	5/11

FOR CALLERS ONLY

12in. and 9in. C.R. TUBES

The tubes have either heater-cathode shorts and or ion burns. Ideal for experimental and testing purposes. Price 12in. 55/-, 9in. 35/-.

SPEAKER FRET

Expanded metal. Finished silver.
12in. × 12in. 3/11
12in. × 18in. 5/11
Plastic. Finished bronze or cream.
12in. × 5in. 2/-
12in. × 6½in. 2/9
12in. × 16in. 6/6

SMOOTHING CHOKES

20 mA 40 H	3/11
40 mA 8 H	3/11
40 mA 10 H	4/3
100 mA 10-20 H	7/3
150 mA 3 H	3/6
120 mA 10 H	18/6

ENGRAVED KNOBS

1 each: Tuning, Volume, L.M.S.G. and Tone. **4/-** the set of 4.

TOP CAPS

Screened, octal, **1/-**.
E.H.T. British, **1/-**.

E.H.T. BOOST KIT

Increase your E.H.T. Kit. Comprises a metal rectifier, 2 .001 mfd. condensers, and a 2-meg resistance. **20/-** The Kit. POST FREE.

TINTED SCREEN FILTERS

9-10in., **18/6.** 12in. **25/-.**

T.V. SCREEN ENLARGERS

9-10in. Clear or Filter, **55/-.** 12in. Clear or Filter, **75/-.** Carriage 3/6 each extra.

T.C.C. VISCONOL HIGH VOLTAGE CONDENSERS.

(Cathodray).
.001 mfd. 6 kV. **4/6.**
.001 mfd. 12.5 kV. **7/6.**
.001 mfd. 15 Kv. **10/-.**
.001 mfd. 25 kV. **25/-.**
.1 mfd. 7 kV. **15/-.**
0.4 mfd. 12.5 Kv, latest plastic case, single bolt fixing, **7/6.**

TELEVISION SOUND AND VISION STRIPS

Chassis size: 11in. wide, 3½in. deep, 4½in. high (inc. valves). 4 R.F. stages. (2 common to both sound and vision.) 6 new Mullard valves. (4 EF80, 2 EB91.) Suitable for A.C./D.C. operation. Valves wired in series. Limited quantity. Produced by famous manufacturer. **LASKY'S PRICE** With all valves. Carriage 3/6 extra. **£6/19/6**

THE VIEWMASTER



METAL RECTIFIERS

WX3 and 6. Each	3/9
14D36	11/8
14A86	20/4
36EHT100	29/6

SUNDRIES

Morganite resistances London	36/3
All other models	35/3
Bulgin components	13/2
Colvern pot/meters, Type CLR901,	3/2 each
Type CLR4089/22,	6/4 each
Morganite type "Q" pot/meters, 5/- each	
Belling Lee L.707 and fuses	8/6

W/B & PLESSEY

Line EHT trans.	32/6
Frame trans.	25/6
3 Mc/s boost choke	5/9
Width control	10/-
Scanning coil	33/3
Main choke	15/6
Focus ring	22/6
Heater trans.: WB/103	42/-
WB/103A	52/6
Front and rear C.R.T. supports	21/6

COILS

All models available including filter chokes. Wenvoe, Kirk o'Shotts, Holme Moss, Sutton Coldfield, **28/-** per set. Alexandra Palace, **20/-** per set. L9 RF choke, **2/-.**

CHASSIS

Sound-Vision, **18/6.** Power-Pack/Time base, **18/6.** Support for S.V. chassis, **6/-.**

CONDENSERS

All by T.C.C.

100 mfd. CE10LE,	14/-
250 mfd. CE10DA,	10/-
2,500 mfd. 25 v.w. CE25AA	6/9
.001 mfd. 6 kV.	4/6
.001 mfd. 12.5 kV,	7/6

All other types in stock. Also available T.C.C. VISCONOL .04 mfd. 12.5 kV., 7/6.

VALVES

EF50 4/3 and **5/6** each; EBC33, 12/6; KT61, 12/10; 6P25 15/10; 6K25, 15/1; 6P28, 25/1; EB92, 10/6; EY51, 24/4.

The television set you can build at home from standard parts.
Wenvoe, Kirk o'Shotts, Holme Moss, Sutton Coldfield and Alexandra Palace operation. Brilliant high definition black and white picture.
Superb reproduction.
Uses 9in. or 12in. Cathode Ray Tube. Table or Console Model.
Incorporates all the latest developments.
Television for the home constructor at its finest.
Send to-day for the CONSTRUCTION ENVELOPE, 32-page booklet crammed with top-rate information and all the necessary data, also 8 full-size working drawings and stage by stage wiring instructions. Model "A" for use in London and Home Counties Model "B" for use in Sutton Coldfield Area. Model "C" for Holme Moss. Model "D" for Kirk o'Shotts. Model "E" for Wenvoe.

PRICE Post free **7/6** per copy.

ALL COMPONENTS IN STOCK AND SOLD SEPARATELY.

CATHODE RAY TUBES

New and unused, fully guaranteed. All makes available from stock for immediate delivery.
9" from **£13.13.8** 12" from **£18.4.10**
Let us have your requirements.

LASKY'S

Lasky's (Harr
370 HARROW ROAD, PA
(Opposite Paddington Hospital) *Tele*
MAIL ORDER & DESPATCH DEPARTMENTS, 485/487

Hours: Mon. to Sat. 9.30 a.m. to 6 p.m., Thurs. half day 1 p.m.

Larger Screen T.V. new Wide Angle Components and Picture Tubes

LASKY'S RADIO

Wait Required for Service Reliability

CIRCUIT DETAILS AND DIAGRAMS SUPPLIED.

14in. rectangular C.R. tube	£22 8 5
17in.	£26 19 8
16in. round, metal cone	£24 6 5
Carriage and insurance extra.	
WIDE ANGLE COMPONENTS	
Line and frame scan coils. Type DC300	£2 2 0
Width coil. Type GL18	10 0
Line linearity coil. Type GL16	10 0
Focus coil. Type FC302	£1 15 0
Line output and EHT transformer, 10-16 kV. Type L308	£2 10 0
Frame output transformer. Type FO305	£1 1 0
ELAC P.M. Focus magnets:	
For 14in. and 16in. tubes	£2 12 6
For 17in. tubes	£2 17 6

C.R.T. MASKS. Brand new

LATEST ASPECT RATIO

9in.	7/6
10in.	7/6
12in.	15/-
12in. flat face	15/-
15in.	15/-

SOILED OLD ASPECT RATIO

9in.	5/-
12in.	7/6
15in.	10/-
12in. with fitted armour plate glass (new ratio)	11/6

ARMOUR PLATE GLASS

12in. Actual size 13in. ×10¼in.	4/-
9in. Actual size 9in. ×8in.	3/-

TELEVISION SELENIUM RECTIFIERS

The very latest "Sentercell" S.T.C. range.

K3/40, 3.2 kV	7/6
K3/45, 3.6 kV	8/2
K3/50, 4.0 kV	8/8
K3/100, 8.0 kV	14/8
K3/100, 12.8 kV	21/6

MULTI RATIO FRAME OUTPUT TRANSFORMER
LASKY'S PRICE 10/6

LINE EHT. TRANSFORMER
Manufacturer's surplus. With EY51 heat winding ... 12/6

FRAME BLOCKING OSCILLATOR TRANSFORMER
LASKY'S PRICE 4/6

CO-AXIAL CABLE
Standard impedance.
Single screened, 1/- per yard.
Twin screened, 1/6 per yard.
Twin balanced feeder, 7½d. per yard. Post extra. Any length cut to your requirements. 10 per cent. discount on orders for 50 yards or more.

T.V. SCANNING COILS
Manfrs. surplus, high resistance frame, low resistance line. **12/6**
Low impedance line and frame. **14/6**

6in. ENLARGER LENSES
Oil-filled plastic 19/6
Carriage 2/6 extra.

S.T.C. METAL RECTIFIERS

RM1	3/11
RM2	4/3
RM4	18/-

VCR97 C.R. TUBES. BRAND NEW AND UNUSED
In maker's original sprung wood transit case.
LASKY'S PRICE 40/-
Carriage 5/- extra.

E.H.T. TRANSFORMER FOR VCR97
Primary: 200-250 v. 50 c.p.s.
Secondary: 2.5 kV., 4 mA.; 4 v., 1.1 a.; 4 v. (CT) 1.5 a.
LASKY'S PRICE 45/-
Postage 1/6 extra.

ION TRAPS
For Connor 108K. 3/-
For Mullard 5/-

BRANDENBERG R.F. E.H.T. UNITS
Output 6-9 kV. Brand new and unused. Supplied complete with EY51 and 6V6.
LASKY'S PRICE £6/6/-

TELEVISION PRE-AMPLIFIERS
For London frequency. 2 Stage, uses 2 6F13 valves. Completely wired, ready for use.
LASKY'S PRICE 15/-
(less valves)

TRIODE FOCUS MAGNETS
Fitted with vernier control, 35 mm.
LASKY'S PRICE 15/-

C.R.T. REAR END PROTECTORS
Suitable for fitting to T.V. cabinets, 2/6 each.

8in. CLOSED FIELD LOUDSPEAKERS
Ideal for television receivers. Less o/trans. 3 ohms. Will not affect your C.R. tube. 17/6

VARIABLE INDUCTANCE WIDTH CONTROLS
3/6 each.

LARGE STOCKS of RESISTANCES ALWAYS AVAILABLE
All values. Prices: 1/10th and 1/8th watt, 7½d. each.
¼ and ½ watt, 4d. each.
1 watt, 8d. each.
Postage extra.

DE LUXE TELEVISION CABINETS

For 12in. cathode ray tubes. Beautiful figured medium walnut finish, with high polish. Fitted with shelf for receiver, glass speaker baffle and fret, and castors for easy movement. Undrilled. Suitable for use with the Viewmaster, "Practical Television," "Little Giant," "Practical Wireless," and "Wireless World" televisors.

LASKY'S PRICE £8.10.0

Carriage 12/6 extra.

Outside dimensions of cabinet: 17¼in. × 16¼in. × 32in. **Why not convert your table receiver to a console?** Adaptor frames for fitting 9in. or 10in. C.R. tubes available if required.

RADIO

ow Road) Ltd.,
DDINGTON, LONDON, W.9.
phones: CUNningham 1979 and 7214
Harrow Rd., Paddington, London, W.10. Tel. LADbroke 4075

TERMS: PRO Forms, Cash with order, or C.O.D. on post items only. Postage and packing on orders value £1 — 1/- extra, £5—2/- extra, £10 — 3/6 extra. Over £10 carriage free. All goods fully insured in transit.

ALL COMPONENTS IN STOCK AND SOLD SEPARATELY

LASKY'S RADIO

SCOOP!

Write for full details, illustrations, and circuit diagrams.

BRAND NEW 9-VALVE CHASSIS

SUPERHET

★ Band spread tuning on all bands. ★ R.F. stage. ★ 6 Wave bands, Medium and 5 short. ★ Variable treble-cut tone control. ★ Switched bass lift. On both gram and radio. ★ Gram input sockets. ★ Push-pull output, 6 watts. ★ Magic eye. ★ Large dial, 6 colours. ★ A.C. Mains 100-250 v. 50 c.p.s. ★ Latest type valves. ★ By famous manufacturer. ★ Frustrated South African export order (Medium wave band calibrated in metres, with South African station names.) ★ Fully assembled, wired and aligned. ★ All valves and components fully guaranteed.

TERRIFIC VALUE DON'T MISS THIS IT'S A SUPER SET!

LASKY'S PRICE £14.19.6

Complete with all valves, knobs and circuit diagrams. (Loudspeaker extra.)

Carriage, packing and insurance 17/6 extra

LASKY'S FUSED TEST PRODS

Safety First. The point of contact is fully retractable, and contact is not made until pressed.

LASKY'S PRICE 4/11 per pair.

J.RA.2. 10-12 WATT CHASSIS AMPLIFIER

For use on 200-250 volt 50 c.p.s. mains. Uses an L63 feeding 2 KT61's in push-pull. U50 rectifier. Chassis size: 9in. × 17in. × 2in.

LASKY'S PRICE £7.19.6
Carriage 10/- extra.

Send 3d. stamp with name and address for details of the J.RA.2.

SUPERHET COIL PACKS

3 wavebands, 12-35 metres; 35-100 metres; 200-550 metres. ¼in. spindle, 1¼in. long wave-change switch. Completely assembled and wired. Size: 4in. × 4in. × 3in. BRAND NEW AND UNUSED.

LASKY'S PRICE 16/-
Circuit available 6d. extra.

WEARITE I.F. TRANSFORMERS. Type 550

Permeability tuned, 445-520 K/cs. Size: 3¼in. high 1¼in. square. Supplied with fixing screws and nuts. Per pair 12/6

BULGIN SWITCHES

D.P.D.T. Change over	2/6
S.P. On/Off	1/6
S.P.D.T. On/Off	1/-

INTER-COM. SETS



4-station operation. For use on A.C./D.C. mains 200-250 volts. Supplied complete, with 3 new valves, ready for immediate installation. Fitted in pleasant plastic cabinet.

£8.19.6

Complete with one extension as illustrated.

SPECIAL COIL BUY

Superhet dual wave coil, medium and long. Aerial and oscillator. For 465 kc/s. I.F. Supplied with circuit.

LASKY'S PRICE 2/11
Per pair. Post 9d. extra.

SHORT WAVE RANGES:
Aerial and osc. for 465 Kc/s. I.F. S'het.
10-30 metres, 1/11 per pair.
25-95 metres, 1/11 per pair.
Circuit supplied with each pair.
Postage 9d. per pair extra.

SPECIAL OFFER. 1 pair of each, 2 short and 1 medium wave.

LASKY'S PRICE 6/9
Post free.
Size of coils: 1¼in. high, ¼in. diam.

P.A. SPEAKERS

RE-ENTRANT HORN 10 WATTS

BEAM PROJECTOR WEATHERPROOF SPEAKERS BRAND NEW AND UNUSED

Horn diameter 14". 15 ohm impedance. New and unused, but slightly soiled.

LASKY'S PRICE Bracket mounting 99/6
Spigot mounting 10/- extra.

Cable extra. Carriage and Packing 15/- each.

TANNOY PRESSURE UNITS

10 WATTS.

7.5 Ohm impedance.

LASKY'S PRICE 89/6

Carriage 4/6 extra.

LASKY'S

Lasky's (Harr

370 HARROW ROAD, PA

(Opposite Paddington Hospital). Tele

MAIL ORDER & DESPATCH DEPARTMENTS 485/487

Hours: Mon. to Sat. 9.30 a.m. to 6 p.m., Thurs. half day 1 p.m

MAINS TRANSFORMERS

All 200-250 volts c.p.s. primary. Finest quality, full guaranteed.

MBA/3. 350-0-350 v. 80 mA., 6.3 v. 3 a., 5 v. 2 a. Both filaments tapped at 4 volts. An ideal replacement trans. Price 21/-

MBA/5. 350-0-350 v. 125 mA., 6.3 v. 4 a., 5 v. 3 a. With mains tapping board. Price 27/6

MBA/6. 350-0-350 v. 100 mA., 6.3 v. 3 a., 5 v. 2 a. With mains tapping board. Price 22/6.

MBA/7. 250-0-250 v. 80 mA. 6.3 v. 3 a., 5 v. 2 a. Both filaments tapped at 4 volts. Price 21/-

AT/3. Auto transformer. 0-10-120, 200-230-250 volts, 100 watt. Price 19/6

AT/4. Auto transformer. 100 volts and 230 volts: Step up or down. 60 watts. Price 9/6

FILAMENT TRANSFORMERS

Special Transformer. 30 volts at 2 amps., with the following tappings :—3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24 and 30 volts, 21/-.

OUTPUT TRANSFORMERS

40 mA. Multiratio	6/11
80 mA. Multiratio	14/11
80 mA. Pentode	12/6
60 mA. Plessey, 6,000 ohms	5/11
Standard pentode	4/11
Pentode	3/6
Midget pentode	4/3
Miniature pentode. 3S4, 1S4	4/6
PX4 Intervalve	8/6
5 : 1 Intervalve	5/11

CRYSTAL DIODES

G.E.C. type, Glass wire ends 3/3 each. B.T.H. Type, Plastic, 3/- each.

VALVE SCREEN CANS

For button base valves. **1/3** each.

For octal valves. **1/3** each.

TWO-GANG TUNING CONDENSERS .0005MFD.

No. 1. Miniature. With Perspex dust cover and trimmers. Size: 1½ × 2 × 1¾in., ¼in. spindle **LASKY'S PRICE** **8/6**

No. 2. Midget. With trimmers. Size: 2½ × 1¾ × 1¾in., ¼in. spindle. **LASKY'S PRICE** **8/6**

No. 3. Midget. With one trimmer. Size: 2¼in. × 1¾in. × 1¾in. ¼in. Spindle. **LASKY'S PRICE** **7/6**

No. 4. Standard type. Size: 2½ × 2½ × 1¾in., ¼in. spindle. **LASKY'S PRICE** **6/6**

THREE-GANG TUNING CONDENSER. .0005 mfd. Size: 3½ × 2½ × 1¾in., ¼in. spindle. **LASKY'S PRICE** **7/6**

TABLE MICROPHONE STANDS

Two section chrome plated. Crackle finished base. **LASKY'S PRICE** **15/-**

MIDGET YAXLEY SWITCHES

4 pole 3-way and 2 pole 5-way. Long spindle. **LASKY'S PRICE** **2/11** each. Postage 3d. extra.

EX-GOVERNMENT VALVES

VU120A	2/6	E1148	2/6
VU111	3/6	RK34	2/6
APV4	12/10	MH14	4/6
57	3/6	S130	4/6
32E	2/6	NGT1	5/-

Tungar chargers recs. From 12/6. Screen grid, 2 v., 4/6 EF50's, 4/3 and 8/6 each, also 1D5 at pre-budget price of 11/-. HUNDREDS OF OTHER TYPES IN STOCK.

PICK UPS

Acos GP.20. Including standard playing head	71/5
Long-playing head extra	43/4
Chancery GPX. Including standard playing head	53/-
Long playing head extra	31/6

P.M. LOUDSPEAKERS

All less o'trans. new and unused. First quality.

3in.	12/11
5in.	12/6
6½in.	13/6
8in.	15/-
10in.	25/-
12in.	75/-

CARBON POT METERS

All with long spindle. ½, ¼, 1 and 2 meg **LASKY'S PRICE** **3/3** less switch, each.

With switch 4/3 each. Al. post extra.

LASKY'S RADIO — Tested Components for Service Reliability

SPECIAL OFFER

BRAND NEW AND UNUSED R1155 RECEIVERS

AERIAL TESTED BEFORE DESPATCH

THESE SETS ARE THE TOPS

Supplied complete with 10 valves. Circuit: B.F.O., A.V.C., R.F. Amp., two I.F. Stages, magic eye, etc., etc. 5 Frequency ranges: 18.5-7.5 Mc/s.; 7.5-3.0 Mc/s.; 1, 500-600 Kc/s.; 500-200 Kc/s.; 200-75 Kc/s.



LASKY'S PRICE £11 . 19 . 6

Carriage 12/6 extra.

POWER PACK AND OUTPUT STAGE.

Fully assembled. For use with above receiver. Complete with valves, wired and working. For operation on 200-250 volts 50 c.p.s.

LASKY'S PRICE 79/6 carriage 5/- extra. **IF PURCHASED WITH R1155.**

SOLD SEPARATELY, PRICE 99/6. carr. 5/- extra.

EXTENSION SPEAKERS

3 in. P.M. Speaker, complete with cabinet.

Medium walnut veneer

modern and pleasing design.

Ideal for radio extension and intercom, "slave" units. Fitted with back.

LASKY'S PRICE 21/- Postage 2/- extra.

SOLON-HENLEY ELECTRIC SOLDERING IRONS

Brand new and unused. Supplied with fitted heavy rubber mains lead. Pre-Increase price. Oval Bit. For 230/250 volts only. **LASKY'S PRICE** **19/-** Postage 1/- extra.

FILAMENT TRANSFORMERS

All 200-250 v. 50 c.p.s. primary.

6.3 v. 1.5 a.	7/11
6.3 v. 3 a.	12/6
6.3 v. 4 a.	14/6
2 v. 2 a.	4/11

LASKY'S NEW RANGE OF POSTAGE STAMP TRIMMERS AND PADDING CONDENSERS

Paxolin	Ceramic
3-35 pf. 40-80 pf.	3-35 pf. 40-80 pf.
30-100 pf.	30-100 pf.
LASKY'S PRICE 6d. each	**LASKY'S PRICE** 9d. each.
5/- per doz.	7/6 per doz.

550 pf. and 350 pf. Ceramic. **LASKY'S PRICE** 1/- each. 10/6 per doz.

METAL RECTIFIERS

6 v. 4 amps.	17/6
12 v. 4 amps.	17/6

12-VOLT MALLORY VIBRATOR PACKS

Output 150 v. 50 mA. Complete with synchronous vibrator. New and unused. **LASKY'S PRICE** **21/-** Postage 2/- extra.

B.S.R. GRAM MOTORS

MU10. Single-speed motor. Without p.u., £2/18/-.

MU14. 3-speed motor. Without p.u., £6/8/6.

GU4A. 3-speed motor, fitted with lightweight high fidelity crystal pick up £9/19/11.

Carriage 5/- per unit extra.

A large stock of Collaro and Garrard gram units, single speed and three speed, single players and auto changers now available. Send us your requirements.

COLLARO TAPE DECK MOTORS

High torque 1,500 r.p.m. For use on A.C. mains 100-125 volts and 200-250 volts. Clockwise and anti-clockwise available, state which required. PRICE 37/6 each.

A FEW ONLY NOW LEFT

L.S.L. Valve and circuit Analyser. £10/19/6. Carriage 10/- extra.

5 valve All Wave Radio Chassis. £10/19/6, fully wired and aligned. With all valves. Carriage 10/- extra. Walnut Plastic Cabinet for radio chassis. 45/-. Carriage 10/- extra.

RF.24 Units. With three new SP61 valves. 25/-. Carriage 2/6 extra.

25 Watt Romac Amplifiers. With radio tuner unit, £25. Carriage 25/- extra.

RADIO

ow Road) Ltd.,

DDINGTON, LONDON, W.9

phones: CUNningham 1979 and 7214.

Harrow Rd., Paddington, London, W.10. Tel. LADbroke 4075.

Terms: Pro Forma, Cash with Order, or C.O.D. on post items only. Postage and packing on orders value £1—1/- extra, £5—2/- extra, £10—3/6 extra. Over £10 carriage free. All goods fully insured in transit.

GARLAND

'THE GARLAND' TAPE RECORDER £37/10/0 (C)

including a 1,200ft. reel of Scotch Boy Tape, and a spare spool. Carriage, etc., 15/-. Crate £1 (not charged if you undertake to return carriage paid to us). No wiring or soldering to be done—just plug in and record and play back from Radio, mike or pick-up. Incorporating the new Lane Tape Table and the UE7 Amplifier, housed in a de luxe walnut veneered cabinet, and supplied complete with a 1,200ft. reel of tape and a spare spool. ★GARLAND KIT FOR THIS RECORDER £32 5/-, plus carriage and crate as above.

Hear the others, then hear and buy the GARLAND TAPE RECORDER

AMPLIFIER A.C.11 (C)

This popular amplifier is still available for those who desire good quality at a low cost. Output is 4 watts, and volume and tone controls are incorporated. High-grade output transformer. H.T. and L.T. supplies are from mains transformer. Amplifier wired and tested. **£6-2-6**
Plus 5/- carriage.
★GARLAND KIT FOR THIS AMPLIFIER £5 2.6, plus 5/- carriage.

3-WAVEBAND SUPERHET TUNER UNITS, for use with the GARLAND ACIV or other high fidelity amplifier. Complete with 3-waveband dial and escutcheon. 12 guineas. (C)

"WEARITE" TAPE DECKS
—a few in stock at time of writing.

GARLAND ACIV AMPLIFIER (C)

The finest amplifier at the price in the world. Maximum output 11.5 watts. Frequency response within 1 db from 20-30,000 c/s. Harmonic distortion (1 kc, 8 watts) less than .2 per cent.; 26 db feedback. High and low gain inputs. Bass, treble and volume controls. **Standard valves used throughout.**
15 gns., plus 15/- carriage, etc.
★GARLAND KIT FOR THIS AMPLIFIER £13, plus 15/- carriage.

GARLAND KITS

All valves, components, wire sleeving, etc., included.

Chassis has all main components (transformers, controls, valve-holders, etc.) already mounted. Only wiring and soldering to be completed.
Small components (resistors, condensers, etc.) are supplied in envelopes numbered according to circuit diagram, thus eliminating colour code difficulties.
Group boards are used where advantageous.
Complete circuit diagrams, wiring diagrams and instructions are supplied.
Valves are guaranteed for 3 months, all other components guaranteed 6 months.

GARLAND KITS mean streamlined construction.

THE UE7 RECORD-PLAYBACK AMPLIFIER (C)

An exceptionally stable magnetic recording amplifier for high impedance heads (Lane, Motek, Sonek, Burgoyne); specially recommended for use with the Lane Tape Table. High and Low Gain inputs, for mike, radio or pick-up. Bass and treble equalisation. Variable tone control. Neon recording level indicator and mains on-off indicator. Supplied completely wired and tested for use on A.C. mains, 200-250 v. complete with 8in. Elac P.M. speaker, and instructions for operation and simple connection to tape recorder. STANDARD VALVES USED THROUGHOUT. Plus 7/6 carriage, etc. **12 gns.**
★ GARLAND KIT FOR THIS AMPLIFIER £9 15/- plus 7/6 carriage.

THE NEW LANE TAPE TABLE (C)

Three motors, very fast wind-on and rewind (under one minute); heads are high impedance on mu-metal laminations, with half-thou. gap, giving a half-hour playing time each side of a 1,200ft. tape reel. **£16 10 0**
New version includes automatic braking. Plus 10/- carriage.

SCOTCH BOY HIGH COERCIVITY TAPE.

We recommend this tape for use with the GARLAND Tape Recorder. Now available in the following lengths. 1,200ft. **35/-**; 600ft. **21/-**; 300ft. **12 3.** Spare 7in. spools (1,200ft.), **4/3.**

CONNOISSEUR.

Two-speed transcription quality motor and turntable. 33⅓ and 78 r.p.m. selected by a switch; 12in. diameter turntable; lapped phosphor bronze bearings; vibration-less synchronous motor. **£22 10 0.** (C)

CONNOISSEUR.

Super lightweight pick-up, with interchangeable heads for standard or micro-groove recordings, fitted with easily replaceable semi-permanent sapphire. Price complete with two heads, **£10 0 0.**

HIGH QUALITY AMPLIFIERS (C)

LEAK "Point One" TL12 12 watt, **27 guineas**
LEAK RC/PA/U remote control pre-amplifier, **9 guineas.**
LEAK "Vari-slope" pre-amplifier, **12 guineas.**
ACOUSTICAL QUAD 12 watt Amplifier (including pre-amplifier), **£35.**
ROGERS "WILLIAMSON" AMPLIFIER, **£31.**
"WILLIAMSON" PA.TC UNIT, **£10 7.6.**
ROGERS "RD BABY DE LUXE" including pre-amplifier, **£18.**
ROGERS "JUNIOR DE LUXE" 10 watt, **£26 10/-.**
ROGERS "MINOR" 4 watt, **£11.**★

DE LUXE TAPE RECORDER CABINETS (C)

Veneered walnut, to take UE7 Amplifier and Lane Tape Table. **£6**

MICROPHONES

Ronette B110 Crystal Microphone, **£3 12 0.** Ronette HM7 Crystal Microphone, **£3 7 6.** Lustraphone CS1Z Moving Coil Microphone with built-in matchin; transformer, **£5 15 0.** Table Stand extra, **£1 1 0.** Acos Mic 22 Microcell Microphone, **£6 6/-.** Ronette RFC7 Microcell Microphone, **£8 15 0.** Ronette S742 Twin Microcell Microphone, **£9 5 0.** Ronette Microphone Stands: Floor **£4 10 0**; Table **£2 12 6**; Desk **15 6.**

CLEAREX TELEVISION MAGNIFYING LENS.

9in. clear, **55/-**; 9in. filter, **60/-**; 12in. clear, **75/-**; 12in. filter, **80/-**. Carriage and packing 5/- each on all types. (C)

B.S.R. SINGLE-SPEED TURNTABLE AND MOTOR, M.U.15.

This very popular unit is again available. Shaded pole motor for use on 200-240 volt 50 c/s mains and rim driven 8in. diameter turntable. Price **£3.** Fitted in portable Bakelite Cabinet, **£4 10 0.** (C)

B.S.R. MONARCH AUTO-CHANGER (C)

Designed to play 10 7in., 10in. or 12in. records intermixed at 33⅓, 45 and 78 r.p.m. The reversible pick-up is self compensated for the L.P. characteristics. For operation on 100/125-200/250 volts, 50 cycles A.C. Price **£17 17/-.**

COLLARO HIGH TORQUE MOTORS

4-pole shaded pole; 1,500 r.p.m.; for A.C., tapped 100-125 v. and 200-250 v. State if clockwise or anti-clockwise required. Ideal for tape recorders, fans, etc. **37 6.**

CATHODE RAY TUBES

Electrostatic focussing and deflection; 5in. diameter; second anode voltage, 2 kV max.; intensifier, 4 kV. max. Exactly as specified for the "Television Oscilloscope" described in the June and July issues of this journal. Brand new in original crate or carton. **32 6** each.

TAPEMASTER MAGNET RECORDING HEADS

A new range of high-quality tape recording heads in chromium-plated cases for single hole fixing. All types are designed for half track recording. Senior Record/Playback, 5,000 ohm **45/-.** Junior Record/Playback, 3,000 ohm. **39 6.** Senior Erase Head, **45/-.** Junior Erase Head, **39 6.**

"VIEWMASTER" TELEVISION.

After three years this is still the only television receiver which may be constructed in the home without any knowledge of television. Instruction envelope containing booklet and stage-by-stage full size drawings, **7 6.** State whether for London, Birmingham, Holme Moss or Kirk o' Shotts.

BROS, Ltd.

MONTROSE METER: Made by Taylor. 7 ranges, 0-6-30-150-300 v. A.C./D.C. 0-30-300-3,000 mA. A.C./D.C. and continuity test. Moving iron movement. Price **£2 10-.**

TUNING CONDENSERS. .50pF max., 3-hole fixing, spindle diam. ¼in. spindle length 1in. **1/6** each. 160pF (0.0001 6μF max.) upright mtg., with 4 fixing feet, spindle diam. ¼in., spindle length 1¼in., **2/3** each. Standard 450pF, with feet, **8/6.**

I.F. TRANSFORMERS. Small size, 2½in. x 1¼in. x 1in., **13/6** per pair. Made for us by a leading manufacturer.

UNDRILLED CHASSIS. .in 20 s.w.g., bright mild steel: Four-sided, size 13in. x 7in. x 2½in., **7/6** each; two-sided with two straps, size 12in. x 4in. x 2½in., price **3/9** each. Two sided with two straps, size 6 x 5 x 2in., price **2/6** each.

OSMOR Q COILS. Wound on 1in. high Polystyrene formers with variable dust iron cores. Available in the following ranges: Mains superhet, aerial, H.F. and oscillator, 13-35, 15-50, 35-120, 70-230, 190-520, 800-2,000 metres. Mains or Battery Superhets: 18-50, 190-560 800-2,000 metres. Mains or Battery TRF, aerial and H.F.: 190-560, 800-2,000 metres. Portable Superhet, Battery or Mains: aerial coil 190-560 metres and long wave aerial loading coil 800-2,000 metres. All the above coils at **4/-** each. Medium wave spiral wound frame aerial (5½ x 3½in.) for portable superhets, battery or mains, **2/6.**

OSMOR COIL PACKS. Type H.O mains superhet 15-50, 190-520, 800-2,000 metres, **44/-.** Type TRF medium and long waves incorporating a reaction winding, **36/6.** Type B for mains or battery portable receivers using a frame aerial and covering 15-50, 190-560, 800-2,000 metres **45/10.** All the above prices include purchase tax.

WEARITE 705 COIL PACK. For mains superhets covering long medium and short waves. An additional position is provided on the switch for gramophone. Price including purchase tax **£2/13/4.**

REACTION CONDENSERS. Solid dielectric, also suitable as tuning controls in one valve receivers. Available in 300pf and 500pf sizes with standard ¼in. spindle. Price **3/10.**

AMPLION CONVETTES. These units enable a battery receiver to be operated from the A.C. mains. Model AD2 supplying 90 volts H.T. at 10 mA, 1.4 volts L.T. at 250 mA., price **£4/19/6.** Model VA1, 120 volt at 10 mA, and 2 volt at 0.9 amp., price **£4/19/6.** Model H2V 100-140 volt at 10-20 mA., and 2 volt 1 amp. This unit also incorporates an L.T. voltmeter. Price **£6/16/6.**

AMPLION ACTIVETTES. Dry batteries can be reactivated by connecting them to these units after use. They pay for themselves in a few months. Model R.B. for standard dry batteries, **£3/5/0.** Model H.B. for hearing aid type batteries, **£4/4/0.**

CERAMIC SWITCHES. Single pole, eight-way, **3/6** each.

J.B. SQUAREPLANE DIALS. Printed in two wavebands with station names. 8/1 drive and bronze escutcheon and glass. Price **12/9.**

J.B. FULL VISION DIALS. Similar to above but with 7½ x 3½in. dial printed in three wavebands. Price **13/-.**

CARBON RESISTORS

ONE-THIRD TO ONE-HALF WATT: IC, 13, 15, 22, 33, 39, 56, 68, 71, 73, 100, 150, 170, 180, 220, 250, 270, 330, 390, 400, 450, 470, 500, 530, 600, 680, 820, 1k, 1.2k, 1.5k, 2.2k, 3.3k, 3.9k, 4k, 4.7k, 5.6k, 6.2k, 6.8,k 7.5k, 8.2k, 10k, 12k, 15k, 18k, 20k, 22k, 24k, 25k, 27k, 30k, 33k, 39k, 40k, 47k, 50k, 56k, 100k, 150k, 220k, 270k, 330k, 470k, 680k, 1m, 1.2m, 1.5m, 2m, 2.2m, 2.7m, 3.3m, 4.7m 10m. All at **4d.** each.

ONE WATT: 50, 56, 82, 120, 150, 240, 330, 290, 680, 1k, 1.5k, 2.2k, 3k, 3.9k, 4.7k, 5.1k, 5.6k, 6.8k 10k, 12k, 18k, 22k, 24k, 27k, 33k, 68k, 70k, 80k 170k, 330k, 390k, 470k, 680k, 750k, 1m, 2.2m All at **6d.** each.

TWO WATT: 220, 1k, 2k, 2.2k, 3k, 3.3k, 4.3k, 4.7k, 6k, 10k, 12k, 20k, 22k, 27k, 30k, 47k, 50k, 68k, 2.2m. All at **9d.**

FOUR WATT: 500k, **1/-** each.

JONES PLUGS AND SOCKETS: Fitted with robust flat pins to handle substantial currents. Metal housing (screen) and cable entry on female socket as supplied, but can be changed over to male plug if required. Six-way plug and socket complete, **1/9.** Eight-way ditto, **2/-.** Ten-way ditto, **2/6.**

PYE PLUGS AND SOCKETS: The ideal temporary or permanent connection for coaxial or other screened cable to chassis. For ¼in., ⅜in., or ½in. cable. Plug and socket complete, **1/3** each, **12/-** per doz., **£5** per gross

LOUDSPEAKERS at PRE-TAX PRICES.

By leading manufacturers. Brand new and fully guaranteed. 5" p.m. moving coil **12/6.** 5" mains energised, with output transformer, **19/6.** 8" p.m. moving coil, **17/6.**

Still a few GOODMANS AUDIOM 60 AT PRE-TAX PRICE of **£8/5/0.** **(C)**

POTENTIOMETER OFFER

25k. miniature ½ watt preset carbon pots, **9d.** each, **7/6** per doz., **50/-** per 100, **£12** per 1,000

METAL RECTIFIERS

Type RM2, 125 v. at 100 mA. Two in series required for mains voltage. Price **4/6** each. Type 14D/972, 250 v. 25 mA. (with reservoir condenser). Small size ideal for test equipment also in place of 14D/36 in T/V circuits. Price **6/6** each. 6 v. 1 a. half-wave (or full wave with C.T. tfmr.), price **8/-** each; 12 v. 1 a. bridge, price **8/6** each; 12 v. 4 a. bridge, price **22/6.**

SENSITIVE NEONS: 85 v. striking SBC with centre contact. Ideal for record level indicator on tape recorders, mains indicator, etc. **2/6** each.

WAFER SWITCHES

For ¼in. dia. spindle. Length of spindle quoted from end of bush.

3p. 2w. ¼in. **1/9.**
6w. paralleling ¼in., **1/9**
1p. 3w miniature ¼in., **1/3.**
4p. 2w. miniature ¼in., **1/9.**
1p. 10w., ¼in., **1/9.**
1p. 11w. ¼in., **2/-.**
3p. 3w. miniature 7/16in., **1/9.**
4p. 3w. miniature 2¼in., **3/6.**
4p. 3w. ¼in., **1/9.**
3p. 3w. 3 bank ¼in., **3/-.**

FIXED CONDENSERS: (pF's): Ceramic: 2, 4, 15, 20, 27, 30, 50, 220, 350. All at **9d.** 1,000pF. **1/-.** Silver Mica: 10, 30, 50, 160, 170, 180. All at **6d.** 200, 300, 1,500, 8,100, **9d.**
Moulded Mica: 50, 75, 100, all at **6d.** 300, 470, 1,000, 2,000, 3,000, 4,000, 2,500, 4,700, 5,000, 10,000, all at **9d.**

CLOSE TOLERANCE SILVER MICA CONDENSERS. All plus or minus 1 per cent. 100pF 400pF, **9d.** each. 1,000pF, 1,400pF, **1/3** each. 10,000 pF, **1/6** each.

HIGH CAPACITY PRECISION MICA CONDENSERS. Accuracy plus or minus 0.5 (point five) per cent of stated value. Pure mica and copper foil or silver.

(a)	0.017970μF ... 1/3	(b)	0.023570μF ... 1/3
(bl)	0.027400μF ... 1/6		
(d)	0.040710μF ... 1/6	(dl)	0.048010μF ... 1/6
(e)	0.055820μF ... 1/6		
(fl)	0.082910μF ... 1/6	(g)	&0.087460μF ... 1/6
(h)	0.108435μF ... 1/9	(i)	0.123750μF ... 1/9
(g)	0.147000μF ... 1/9		

Many standard values can be made up by parallel or other combinations of above, e.g. a + fl = 0.1μF; i + fl = 1μF.

HIGH VOLTAGE MICA CONDENSERS 0.1μF 1,500 v. wkg. Bakelite-cased upright mtg., 3in. x 2¼in. x 1¼in. overall, **2/-** each. Ceramic pot type, 10C/2178, 0.0002μF 5 kv. wkg., high H.F. current, **2/6** each. Flat bakelite-cased type ZA2837, 0.001μF, 5 kv. A.C. test, 0.5 A. at 2-8 mc.; size 3¼in. x 1¼in. x ⅝in.; suitable tx or tv, **1/9** each. 0.002μF, 2.5 kv. wkg., **1/3.**

TOROIDAL CERAMIC POTENTIOMETERS. 17k, 100 watt, **8/6**; 2.4k, 50 watt, **6/6.**

TOGGLE SWITCHES. SPCO, 250 volt, 2 amp., **1/9**; DP on-off 250 volt, 1 amp. **2/3.**

EX-GOVT. POTENTIOMETERS

Value	Track	wattage	Spindle length	Price
50	W/W	5	Pre-set	2/6
500	W/W	5	1¼in.	3/9
2k	W/W	3	Pre-set	1/9
2k	W/W	5	¼in.	2/6
3k	W/W	5	Pre-set	2/6
3k	Carbon trop.	2	¼in.	1/9
5k	W/W	2	¼in.	2/6
8k	W/W	5	¼in.	2/6
10k	Carbon trap.	2	¼in.	2/-
20k	W/W	3	Pre-set	2/-
20k	W/W	5	1in.	3/-
20k	Carbon trop.	2	¼in.	1/9
25k	W/W	2	¼in.	3/-
50k	W/W earthed slider	3	¼in.	2/6
50k	Carbon Mini.	½	¼in.	1/6
100k	Carbon Mini.	½	¼in.	1/6
200k	Carbon	1	¼in.	1/9

All new and unused. Spindle diameter ¼in. in all cases. Quantity prices on application.

ALL GOODS NEW AND UNUSED. **(ITEMS (C) REQUIRE CRATING FOR SAFE DESPATCH. CRATES ARE NOT CHARGED PROVIDED YOU UNDERTAKE TO RETURN CARRIAGE PAID TO US.**

PLEASE ADD POST OR CARRIAGE ON ALL ITEMS. KINDLY PRINT NAME AND ADDRESS. POST ORDERS TO OUR DEPTFORD ADDRESS. EARLY CLOSING THURSDAY, OPEN ALL DAY SATURDAY.

GARLAND BROS, Ltd.

CHESHAM HOUSE, DEPTFORD BROADWAY, S.E.8

Telephone: TIDEWAY 4412/3

5 OBELISK PARADE, LEWISHAM, S.E.13

Telephone: LEE GREEN 4038

You're SURE to get it at

STERN'S

ESTABLISHED 25 YEARS

BUILD A PROFESSIONAL RADIO OR AMPLIFIER AT LESS THAN HALF TODAY'S PRICE

A MAINS OR BATTERY PORTABLE KIT

A Midget 4-valve Superhet Portable Set covering medium and long wavebands.
Designed to operate on A.C. mains 200/240 volts, or by an "Alldry" battery. The set is so designed that the mains section is supplied as a separate unit which may be added at any time. The Kit therefore can be supplied as a "Alldry" Battery Superhet Personal Set which can then be accommodated in the Attache Case as illustrated above (size 9½in. × 4½in. × 2in.). This is attractively finished in hard maroon, dark green or blue rexine (to order) or as a Combined Mains/Battery Superhet Portable Receiver, for which a polished Wood Cabinet is available to accommodate both Mains Unit and Batteries together.
Circuit incorporates delayed A.V.C. and Pre-selective Audio Feedback. Kit is complete in every detail and includes ready-wound Frame Aerials, fully aligned I.F. Transfs., and drilled Chassis, etc. Overall size of assembled chassis 8in. × 4in. × 2½in.
This Receiver as illustrated can be completely built for approx. £10 (plus Mains Unit if required). Send 1/9 for the fully descriptive Assembly Book which includes Practical Layouts and complete price list of Components.

THE "MINI-TWIN" 1-VALVE BATTERY SET

A design of a simple 1-valve 2-Stage Battery Receiver, giving excellent results on Medium and Long Wavebands, and having exceptionally low Battery consumption.

Drilled Chassis and Practical Diagrams make it the ideal set for the beginner to build.
The complete chassis including valve can be built for 37/6.
The attractive Plastic Case is 9/6, and suitable headphones 14/9.
The complete Assembly Instructions, Layouts and a Component Price List are available for 1/6.
This Receiver also performs excellently, without modification, as a Tuning Unit and in addition, with simple modifications for which a complete diagram is provided makes a first-class Pre-amplifier for Pick-Ups or Microphone.

STERN'S "RADIO TUNER MANUAL." Price 2/6.
(Plus 3d. post.) Contains complete and detailed Assembly Instructions showing how to make:—
A 1-valve T.R.F. Tuning Unit, covering long and medium wavebands.
A 4-station "Pre-set" Superhet Tuning Unit, producing 3 Stations on medium waveband and 1 on long wave.
A 2-Valve Superhet Tuning Unit, covering short, medium and long wavebands.
Each Tuner is for A.C. mains operation. Circuit Diagrams and Practical Component Layouts are shown, together with Complete Component Price Lists.

PICK-UPS

Cosmocord "G.P.20," for standard records, £3/11/5; interchangeable (G.P.1) for Decca L.P. records, £2/3/4.
Decca lightweight "turnover Head" type, for L.P. and standard records, £3/19/2.
Marconi, Standard, lightweight Magnetic, £1/15/10. Marconi Matching Transformer, 7/6.
Goldring, Standard, lightweight, Magnetic, 33/10.

A MIDGET 4-STATION "PRE-SET" RECEIVER

A complete Kit to build a 4-station "Pre-set" Superhet Receiver for A.C. mains operation.
The Set is designed to receive any three Stations on medium waveband and one on long wave, each Station being received by the turn of a Rotary switch—No Tuning being necessary.
It is of midget size, being 9in. × 4½in. × 7in. high, and has the performance of a far more expensive ready-made set, but can be built for half the price.



Price of complete Kit of Parts (including aligned I.F. Trans. and drilled Chassis, etc.), £9 15/- (incl. P.T. plus Cabinet £5/6), or the components can be purchased separately. The complete Assembly Instructions (including Individual Component Price List, Circuit and Component Layout, etc., are available for 1/9.

THE "MINI TWO-THREE" BATTERY PORTABLE

An "Alldry" Battery Portable of midget size, 8½in. × 4½in. × 3½in., designed to cover medium waveband 190-550 Metres, with use of short trailer Aerial.

The simple design of this Receiver is so arranged that either a 3-valve Set or a 2-valve (afterwards easily converted to the 3-valve) can be made.
Consists of a T.R.F. circuit, using a Regenerative Detector with H.F. Stage, and a High Gain Output Pentode. Valve line up 1T4—1T4—DL94.
The 3-valve Set can be completely built for £4/3/6 (less Case) and the 2-valve for £3/3/- (less Case). Each price includes Valves, Speaker and drilled Chassis.
Send 1/9 for the Assembly Instructions, they include simple and complete Practical Component Layouts and Diagrams, which enable the most inexperienced constructor to successfully build either Set. All Components are available for separate sale, a price list being supplied with the Assembly Instructions.

ALL KITS INCLUDE "EASY TO FOLLOW" POINT-TO-POINT WIRING DIAGRAMS

THE "WIRELESS WORLD" 3-VALVE SET

A Midget 3-valve T.R.F. Receiver for operation on A.C. mains, covering long and medium wavebands.
We are able to supply all of the components to build this set, as designed, and specified in the Feb. 1950, issue, including the drilled Chassis. Valves and moving coil Speaker, etc., at the following prices:—
To construct complete Chassis less Dial and Drive Assembly, £5/5/-. Ditto, including Dial and Drive Assembly, £6.
To construct the complete Set, including Dial and Drive Assembly and Cabinet, £7/3/6.
Overall size of Cabinet is 7½in. × 5¼in. × 11¼in.
A reprint of the designer's article, giving Circuit and Assembly Instructions (this is available separately for 9d.) together with a Practical Component Layout is included with each of above assemblies.

THE "PRACTICAL WIRELESS" "MINI FOUR" BATTERY PORTABLE

A 4-valve Battery Superhet Receiver designed to receive 4 Pre-set Stations, three on medium waveband and one on long wave to suit local conditions. Each Station is obtained on the set by the turn of a Rotary Switch. No tuning is necessary.



It is of midget size, being only 4½in. × 6½in. × 4½in. when completely built, and is very easily assembled from diagrams supplied.
Cost of all components to build this Set, in accordance with the design, including a drilled and cut chassis and panel, and new valves, is £9/10/- (or less valves for £8/7/6). Attractive carrying case finished in blue leatherette 16/9.
Complete constructional data with a blue print, which shows the Practical Component Layout and Wiring Diagram, together with an Individual Component Price List is available separately, 1/6.
Our Battery Eliminators (illustrated opposite) available in kit form are suitable for use with this set.

THE "WIRELESS WORLD" MIDGET A.C. MAINS 2-VALVE RECEIVER

We can supply all the components to build this set, including Valves and Moving Coil Speaker for £3/10/-, including designers' Complete Building Instructions (these are available separately for 9d.)

★ *Send 9d. P.O. for our STOCK LIST, it shows "hundreds" of Wireless*

When ordering please include

STERN RADIO LTD., 109

Tel: CENtral

A Complete Kit of Parts to build a 3-4 WATT HIGH GAIN AMPLIFIER

(For operation on A.C. or D.C. Mains 200-250 volts.



This amplifier will give 3 Watts output for the small input voltage of only 75 millivolts, and is therefore suitable for use with any type of pick-up from the crystal type to the miniature H.F Magnetic type.

A tone control is incorporated and the quality produced is excellent. The overall size of chassis is 9in. × 5in. × 7in., and valve line up 6BY5-6sH7-6Y5G.

Price of complete kit including drilled chassis and Valves £4 2 9, plus 6/6 P.M. (which fits on chassis), 16/-, or 8in. P.M., 18/9.

Copy of Assembly Instructions and Components Price List available for 1/3.

A QUALITY "PUSH-PULL" AMPLIFIER KIT



A Kit of Parts to build a 6-8-watt Push-Pull Amplifier for operation on A.C. mains 200-250 volts.

Incorporates a simple arrangement to enable either a magnetic, crystal, or lightweight pick-up to be used. A 10-watt Output Transformer is designed to match from 2 to 15 ohm speakers. Tone controls incorporated. The overall size of the assembled Chassis is 10in. × 8in. 7½in. high. Price of Kit complete in every detail, including drilled Chassis and Valves, £6 12 6. Component Layout is supplied.

Price of assembled Chassis, supplied ready for use, £8 2 6.

"PERSONAL SET" BATTERY ELIMINATOR

A complete Kit of parts to build Midget "Alldry" Battery Eliminator, giving approx. 69 volts and 1.4 volts. This eliminator is for use on A.C. mains and is suitable for any 4-valve Superhet Receiver requiring H.T. and L.T. voltage as above, or approx. to 60 volts.

The Kit is quite easily and quickly assembled and is housed in a light aluminium case size 6½in. × 4½in. × 3½in. Price of complete Kit with easy-to-follow Assembly Instructions 42 6.

In addition we can offer a similar COMPLETE KIT to provide approx. 90 volts and 1.4 volts. Size of assembled Unit 7in. × 3½in. × 4½in. Price 47 6.

You're SURE to get it at

STERN'S

ESTABLISHED 25 YEARS

TWO NEW DENCO ULTRA MIDGET SUPERHET COIL TURRETS

Both having a Rotary Turret Action

(a) The C.T.9 Turret consists of 4-STATION "PRE SET" UNIT from which any three Stations on medium waveband and one on long wave can be received by a turn of the Turret Switch.

(b) The C.T.10 Turret being a 5-wave and 1-coil Pack, incorporating a fourth switch position providing for completely switching out Radio when using Gram. The complete coverage is: long waveband 700 to 2,000 metres; medium waves 190 to 570 Metres and short waves 15 to 50 Metres.



The outstanding Advantages these units have over other similar units can be readily seen, the main features being:

(a) Neat and compact, the overall size being only 2½in. dia. × 1¾in. deep.

(b) Fitting is simplicity itself, each Turret having one-hole fixing and requiring only four connections.

(c) The Rotary Turret design switches the actual Coils, which incorporate a variable iron dust core, on to positive contacts, thereby reducing stray capacities to the absolute minimum.

(d) They are supplied Factory wired and aligned and have been designed to operate with any conventional circuit arrangement of 465 Kc/s, and due to their unique design are extremely sensitive and efficient.

Price: C.T.9 Turret, 42/10. C.T.10 Turret, 52/-.

A complete Receiver Circuit together with leaflet containing all necessary data is included with each Turret. These can be supplied separately for 9d.

BATTERY CHARGER KITS

All Kits incorporate Metal Rectifiers, and are for use on A.C. mains 220-250 volts. All Kits include an easily followed Wiring Diagram.

For charging 2 4-or 6-v. batteries at 1 amp., £1 8/-.

For charging 6-volt battery at 1 amp. with Variable Resistor and Meter, £2 12 6.

For charging 12-volt battery at 1 amp., £1 9 3.

For charging 12-volt battery at 1 amp., with variable Resistor and Meter, £2 14/-.

For charging 6- or 12-volt battery at 2½ amps., £2 1/-.

For charging 6- or 12-volt battery at 2½ amps., with Variable Resistor and Meter, £3 8 3.

A 5-VALVE "ALL-WAVE" SUPERHET RECEIVER

For use on A.C. Mains 200 to 250 volts.



This small attractive Receiver, embodying modern circuit technique is designed to cover Short, Medium and Long wavebands, and incorporates the following outstanding features:

- A superhet circuit designed for high efficiency on all three wavebands.
- A 3½in. P.M. Speaker accurately matched for good quality reproduction.
- The latest range of new 6-volt R.V.A. miniature valves.
- Built in Frame Aerial with provision for external aerial for distant stations.
- A White Plastic Cabinet of very attractive appearance overall size 7½in. × 5½in. × 5½in.
- THE RECEIVER AS ILLUSTRATED CAN BE BUILT FOR APPROX. £10 10/-.

Send 2/6 for the fully descriptive stage by stage assembly and wiring diagrams, with which complete price details are given.

THE FAMOUS W.B. "STENTORIAN" RANGE OF P.M. SPEAKERS.

Size.	Impedance.	Watts	Price
2½in.	2-3 ohms	1	18 6
3½in.	"	2	19 6
5in.	"	2½	21/-
6in.	"	2	24 6
8in.	"	5 (also in 15 ohms)	32 6
9in.	"	7	36 9
10in.	"	10 (also in 15 ohms)	44 6
12in.	15 ohms	15	£9

Television.—Complete range of **Haynes** Components are in stock. Enquiries welcomed.

The Viewmaster Televisor.—We have had very considerable experience in assisting customers to build this T/V and can supply all SPECIFIED COMPONENTS EX STOCK. The Assembly Instructions showing Practical Layouts and Price List are available for 7/6 for London, Sutton Coldfield, Holme Moss, Kirk-o'-Shotts and Wenvoe.

Denco I.F. Liner, for accurately lining 465 Kc and 1.6 M.c. I.F. channels and associated circuits. Battery operated small and completely self-contained. 59/6 plus 2/2 for battery.

THE FAMOUS "SHAFTESBURY" RIBBON MIKE Incorporating internal line Transformer having Transformation ratio from ribbon impedance up to 500-600 ohms. Reduced from £10/10/- to £6.

A special line to grid 500/600 ohm. Transformer is also available for 25/-.

Transformers. (a) Input 230 volt, output 200 volt 25 mA. and 6.3 v. 9 amp., 11/9; (b) Input 230 volts, output 250 volts 30 mA. and 6.3 volts 1 amp. 14/6.

E.H.T. Transformer. Prim. 230 v. Sec 5 Kv. and 4 volt tapped 2 volt, 59/9. Do. but 4 Kv., 57/6.

Metal Chassis, substantially made with four sides, 7in. × 5in. × 2in., 5/3; 8 × 5 × 2in., 5/3; 10 × 6 × 2½in., 6/-; 10 × 7 × 2½in., 6/3; 12 × 9 × 2½in., 7/9; 14 × 9 × 2½in., 8/3; 16 × 8 × 2½in., 9/-.

New Mfrs. Surplus Transformers. Input 200 to 240 volts, output 12 v. 6 amps., 21/-.

E.H.T. Rectifiers.

Types. 14DE36, 11/3; 16HT28, 12/6; 16EHT56, 17/9; 16EHT58, 13/10; 36EHT35, 16/2; 36EHT40, 20/6; 36EHT45, 22/6; 36EHT50, 24/10; 36EHT60, 25/6; 36EHT100, 29/5; 366EHT15, 7/9.

F Wave Bridge Rectifiers:

For charging 2, 4 or 6 volts at 1½ amps. 12/-
For charging 6 or 12 volts at 1½ amps. 16/6
For charging 6 or 12 volts at 3 amps 21/6
For charging 6 or 12 volts at 5 amps. 26/10
For charging 12 or 24 volts at 3 amps. 25/9

Meter Rectifiers. Westinghouse 250 micro-amp., 12/9; 1 mA. 11/9; 5 mA. 6/9.

Selenium Rectifiers. H.T./H. wave. 250 v. 50 mA, 6/6; 250 v. 100 mA, 8/6; 250 v. 170 mA. 15/6.

Charger Transformers. A.C. ratings. Suitable for use with preceding rectifiers. Each has input of 220 volts Outputs: (a) 24 volts tapped 12 v. 9 v. and 4 v. at 3 amps., 25/-; (b) 30 volts tapped 15 v. and 9 v. at 3 amps., 26/3; (c) 15 volts tapped 9 v. at 5 amps., 21/-; (d) 12 volts 1½ amps., 12/3; (e) 15 volts tapped 9 v. at 6 amps., 24/3; 15 volts tapped 9 v. at 1½ amps., 15/9; 12 volts 1 amp., 7/6.

A Battery Charger Wiring Diagram is included with purchase of Charger Transformer and Rectifier.

Components and many KITS OF PARTS for both Sets and Battery Chargers approx. cost of Post and Packing.

& 115 FLEET STREET, E.C.4

5814 and 2280

CLYDESDALE

Bargains in
EX-SERVICE AND MANUFACTURERS' SURPLUS
RADIO & ELECTRONIC EQUIPMENT

BATTERY POWERED COMMUNICATIONS RECEIVER R1224A

Ref. 10D/13074

Covering the "Trawler Band" 3-wave ranges.
9.0-4.3 mcs. — 30-70 metres.
4.3-2.1 mcs. — 70-140 metres.
2.1-1.0 mcs. — 140-300 metres.
5 Valves: VP23, R.F. Stage. FC2A, Mixer. VP23, I.F. Stage. 210LF, Det. 220PA, Output.
I.F. of 470 kcs.
250 pf. 3-gang tuning condenser. Sensitivity control reaction control for C.W., Aerial Trimmer, High impedance and 600 ohm. line outputs.
A very F.B. receiver for portable "160," "80" and "40" metre use, or for a station without mains supply. Exceptionally sensitive and selective. Complete (less batteries) in wooden cabinet with calibrated chart on hinged lid. Dim.: 14½ x 10 x 9½in., finish grey.
ASK FOR No. X/H355 **£7.19.6** Each CARRIAGE PAID
IN ORIGINAL TRANSIT CASE
Batteries required: HT 120 volts, GB 9 volts LT 2 volts. Circuit and data for R1224A available at 1/3 each, post paid.
Range can be altered or extended by using Denco "Maxi Q" Coils. Details of Denco Coil Range on request.



SPEECH MODULATOR BC.456

Employing screen modulation complete with valves 1625, 12J5, and stabilizer VR.150/30, modulation transformer RF choke, mic. transformer, 3 relays, plus various condensers and resistors, etc., in metal case, 10½ x 7½ x 4½ins., chassis depth 2½in.
(Less Dynamotor).
Ask for No. X/E42. **37/6** each CARRIAGE PAID
Circuits available at 1/3.

TRANSMITTER TUNING UNITS

Each having Vernier tuning dial, variable capacitor, tank coil unit on ceramic former, ceramic switch, H.F. choke, etc. In metal cabinet 17½ x 7½ x 8in. Finish black. Unused, but externally soiled, cases slightly dented and scratched.
TU.5B.
1,500-3,000 Kcs.
Ask for No. X/H27 **35/-** each. CARRIAGE PAID
T.U.6B, T.U.7B, T.U.8B, T.U.9B, T.U.26B, 1st grade at 22/6 each; 2nd grade at 18/6 each.

WIRELESS REMOTE CONTROL UNIT D No. 2 MK. 2. ZA20491

Consists of a wooden box 7½ x 6½ x 5½in. with hinged lid, containing three relays 1 of 1 make with 500 ohms coil 1 of 1 make with 20 ohms coil, and heavy duty contacts, 1 of double coil type, 1,750 ohms coil makes, 200 ohms coil breaks with QMB switch and 8 brass terminals.
ASK FOR No. X/H803 **14/6** EACH POST PAID



METAL (MINE) DETECTOR NO. 4 Ref. ZA24238

Of Cdn. design and construction, using IT4 pentodes. Comprising TC. Amplifier, Search Coil, Sweep Pole, Control Box. Headphones, Test Unit and Ruck sack. Complete less batteries in fitted transit case.
ASK FOR No. X/H179 **£6.19.6** CARRIAGE PAID

192 PAGE CATALOGUE. NEW LIST No 8C.
Giving details and illustrations of ex-services items and cancelling all previous lists and supplements.
Now Ready—Price 1/6.
Price credited on first purchase of 10/- or over.

METAL (MINE) DETECTOR NO. 3

In Original Transit Case Ref.: ZA.22755/1
Of British design and construction.
Comprises: A 3-valve AF Amplifier (ARP.12's = VP.23 Mazda), with space for dry batteries (not supplied) in metal box dim.: 10½ x 10½ x 3½in., with lead terminating in 7-way cable socket, contained in a carrying satchel, with high resistance headphones.
Search Coil, ZA.22175 or Equivalent, surface area 14½ x 10in.
Search Coil Pole, comprising: Control Box Pole and pivot-eye assembly. Pole (rear section) and Counter-weight assy.
Small Probe, Surface area 9 x 5½in.
The whole contained in original fitted transit case, dim.: 52½ x 14 x 10½in. Weight: Approx. 76 lbs.
ASK FOR No. X/H.856 **£8.19.6** Each CARRIAGE PAID
Power Requirements, Dry batteries L.T. 6 Type "S" 1½ volt cells. H.T. 60-90 volts.

I.F./A.F. AMPLIFIER UNIT R.1355
(illustrated at right)

The popular T.V. Sound and/or Vision Unit. 5 I.f. stages, 10 valves 8/VR65 (SP61), 5U4G, VU120A, etc., etc. In metal case 18in. x 8½in. x 7½in. Used, good condition.
IN ORIGINAL CASE
ASK FOR No. X/E770 **67/6** CARRIAGE PAID
2nd Grade in Transit Case, 59/6 Carr. Paid.
3rd Grade, loose stored, 42/6 Carr. Paid.
Circuit of R1355 Available at 1/3.

FOR INEXPENSIVE TELEVISION



INDICATOR UNIT TYPE 6H in Maker's Original Case

Containing a VCR97 Cathode-ray Tube, with mu-metal screen, 4/VR91s (EF50), 3/VR54s (EB34), various w.w. pots, switches, H.V. Conds., Resistors, etc., built in metal chassis to fit into metal box 18 x 8½ x 7½in. All controls are brought to front panel beside viewing screen.
ASK FOR No. X/E777 **£4.9.6** CARRIAGE PAID

R.F. UNIT TYPE 24

Frequencies covered 30-20 mcs. (10-15 metres). Switched tuning, 5 pre-tuned spot. freq., 3/VR65 (SP61). Output approx. 7-8 mcs. in metal case, 9½in. x 7½in. x 4½in.
IN ORIGINAL CARTON
ASK FOR No. X/H850 **30/-** Each POST PAID
IN FAIR USED CONDITION
ASK FOR No. X/H851 **19/6** Each POST PAID

R.F. UNIT TYPE 25

Frequencies covered 40-50 mcs. (6-7.5 metres). Otherwise as Type 24 above.
IN ORIGINAL CARTON
ASK FOR No. X/H847 **30/-** Each POST PAID
IN FAIR USED CONDITION
ASK FOR No. X/E772 **19/6** Each POST PAID

R.F. UNIT TYPE 26



Frequencies covered 65-50 mcs. (5-6 metres). Variable tuning 2/VR136 (EF54), VR137 (EC52). Output approx. 7-8 mcs. in metal case 9½ x 7½ x 4½in. Uncartoned but good condition.
ASK FOR No. X/H848 **67/6** Each POST PAID

R.F. UNIT TYPE 27

Frequencies covered 85-65 mcs. (3.5-5 metres). Otherwise as Type 26 above.
ASK FOR No. X/E771 **63/-** Each POST PAID
CIRCUIT AVAILABLE AT 1/3, POST PAID.

ORDER DIRECT FROM

COMPLETE STOCKS OF RADIO, TELEVISION AND COMPONENTS BY ALL THE PRINCIPAL MAKERS

CONSTRUCTORS ! !

BUILD YOUR OWN TELEVISION RECEIVER

London—Sutton Coldfield—Wenvoe—Holme Moss—Kirk-o-Shotts

"VIEWMASTER" Envelope any region **7/6** each.
Contains complete Assembly Instructions, circuits, 8 full size wiring diagrams, can be used as templates. Stage by stage layout, detailed parts list, etc., etc. Fully Illustrated.
Designed in association with foremost manufacturers. Parts made by Bulgin, Whiteley, Ediswan, T.C.C., Westinghouse, G.E.C., Colvern, Belling & Lee.

Complete Stocks of Components Available from Stock.

BOOKS ON TELEVISION

Television Explained (Iliffe)	5/3
The Television Receiver Practice	5/3
Inexpensive Television (No. 4) (S.W. Press)	2/6
T.V. Fault Finding (No. 5) (S.W. Press)	5/3
Television Construction Manual (Bernards 59)	3/6
Television Servicing Manual (Bernards 80)	4/6
High Definition Television Construction Manual (Bernards 89)	2/6
"Argus" T.V. Receiver Blueprint (PT)	2/6

INEXPENSIVE TELEVISION
Using Ex-Service Radar Units.
The Book, **INEXPENSIVE TELEVISION** Price 2/6
S.W. Press data booklet No. 4 (3rd Edition).
Reprints from "Practical Television."
Article by B. L. Morley using Indicator Type 62 1/6
(Components Price List free on request).
The "Argus" T.V. Receiver, Blueprint and data. 2/6
(Components Price List free on Request).
Transformers E.H.T. **55/-, 57/6, 59/6** or **65/-** each.
Transformers Mains (Morley) **55/-, 60/-, (Argus) 69/6** each.

TUBULAR STEEL MAST
Adm. Type, height 36ft. in 6 sections special spring clip fitting, ensures very Rigid Assembly. Colour green, weight 43lb. **No base or lashings supplied.**
ASK FOR No. X/H857 **37/6** Each CARR. PAID

THROAT MICROPHONE NO. 2A
Ref.: ZA.20179. Pair lozenge shaped electro-magnetic throat pieces with strap and lead.
ASK FOR No. X/H858 **6/6** Each POST 6d.

TYPE 1 VISUAL INDICATOR
Ref.: 10Q/2. For R.1155 D.F. Section.
Dual reading, left right, DF meter. 2¾in. scale. Dim.: 3¼ x 2¼in. overall 4 hole fixing, 2½ x 2¼in. between centres.
IN ORIGINAL CARTON
ASK FOR No. X/H862 **21/-** Each POST PAID

TYPE 1 VISUAL INDICATOR
As X/H862, but used condition.
ASK FOR No. X/H862A **12/6** Each POST PAID

HEAVY DUTY VARIABLE RESISTANCE
Worm drive, heavy duty contacts. Former length 6¼ x 1¼in. dia. Mounted on assembly with cast end-plates. Dim.: Overall ht. 4¾in. length less spindle 7⅛in., spindle 2 x ¼in. Resistance 7.5 ohms 4 amps.
ASK FOR No. X/H853 **25/-** Each POST PAID

HEAVY DUTY VARIABLE RESISTANCE
Construction as X/H853.
Resistance 60 ohms, 1.5 amps.
ASK FOR No. X/H854 **21/-** Each POST PAID

SHOCK MOUNTS Type 24. Ref.: 10A/11778.
2lb. Base, 1¼in. square, 4-hole fixing. Height ¼in., rubber suspension.
ASK FOR No. X/H861 **6d.** Each POST 3d.

METAL CASED PAPER CONDENSER
4 mfd. Capacity, 2,000 V.D.C. Test. Dim.: overall 1⅝ x 4 x 1¼in.
ASK FOR No. X/H860 **4/6** Each POST 3d.

EDDYSTONE COMMUNICATIONS RECEIVERS

MODEL 680X **£106.0.0**
Continuous coverage 30 mc/s to 480 kc/s in 5 ranges.
Fifteen Valves. Two IF Stages. Variable Selectivity. "S" Meter. Two RF Stages. Separate Oscillator. Crystal Filter. Push Pull Output. Polychromatic Finish.
Reliable Reception in any part of the World.

MODEL 740 **£38.15.0**
1.4-30.6 mc/s and 205-620 metres in 4 ranges.

Eight Valves. "S" Meter. BFO. Delayed AGC System. Separate Gain Controls. Noise Limiter. Black Ripple Finish.

MODEL 750 **£68.0.0**
1.7-32 mc/s and 480-1165 kc/s in 4 ranges.
Double Superheterodyne. Eleven Valves. High Sensitivity. Mechanical Bandspread. Variable Selectivity. Separate Gain Controls.

MODEL 670 inc. P.T. **£68.0.5**
FOR EXPORT £46.15.-.
10-51.7 metres and 110-575 metres in 4 ranges.



The Marine Receiver. AC/DC 110-250V. Seven Valves. Metal Rectifier. Fine Tuning Indicator.

MODEL 720 **£43.10.0**
90-620 metres and 900-2,300 metres in 3 ranges.
Yachtsman's Receiver. 12 Volt Operation. Receives Consol Navigation System. Time Signals, 600 Metre International distress wave, Trawler and small Shipband.

MODEL 710 inc. P.T. **£72.0.5**
FOR EXPORT £49.10.-.
1.4-30.6 mc/s and 205-620 metres in 4 ranges.
All World Six. 6 Volt Operation.

Full specifications sent on request.

ASSOCIATED ITEMS

Diecast Cabinet Speaker (Black, Grey, Brown) ASK FOR No. X.688	£3 3 3
Vibrator Power Unit. ASK FOR No. X.687	£8 5 6
Vibrator Power Unit. ASK FOR No. X.687/1.	£8 10 6
Mains Filter Unit ASK FOR No. X.732	£2 15 6
Doublet Aerial (50ft. feeder). ASK FOR No. X.731	£2 17 9
Doublet Aerial (100ft. feeder). ASK FOR No. X.731/1	£3 3 3
Signal Strength Meter ASK FOR No. X.669	£5 15 6
Receiver Mounting Blocks pair. ASK FOR No. X.774	11 6
6-volt Accumulator. ASK FOR No. X.661	£9 18 6

All prices subject to change without notice.

A.C. MAINS SHADED POLE INDUCTION MOTOR



120/240 volts. Ideal for models, recorders, etc. 4-hole fixing (with fixing screws). Spindle dia. ¼in., length 1¼in. Speed approx. 2,800 r.p.m.
ASK FOR No. X/H798 **27/6** Each POST PAID

192 PAGE CATALOGUE NEW LIST NO. 8C
Giving details and illustrations of ex-services items and cancelling all previous lists and supplements.
Now Ready—Price **1/6.**
Price credited on first purchase of **10/-** or over

A.C. MAINS 200/250 Volts GRAMOPHONE MOTORS

Fitted with 9in. Turntable and mounted on 8in. metal plate, for crystal pick-up. Mfg. special line.
ASK FOR No. X/H320 **58/6** Each POST PAID

¼ MILE REELS OF WIRE
Metal Reel 8¼in. dia. x 3in. containing 880 yards of single P.V.C. covered 23 s.w.g. wire. Weight 12lb. nett.
ASK FOR No. X/H855 **39/6** Per Reel POST PAID

CLYDESDALE SUPPLY CO. LTD.,
2 BRIDGE ST., GLASGOW, C.5
Phone: SOUTH 2706/9
BRANCHES IN SCOTLAND, ENGLAND AND NORTHERN IRELAND

MAINS TRANSFORMERS

These transformers are all famous radio manufacturers' surplus and are fully interleaved, impregnated and guaranteed.

Primary 200-250 v. P. and P. on each, 1/6 extra.

250-0-250 100 mA., 4 v. 4 amp., 4 v. 2 amp., upright or drop-through, **16/-**.

300-0-300, 100 mA., 6 volt 3 amp., 5 volt 2 amp., **25/-**.

280-0-280, 60 mA., 6 v. 3 amp., 4 v. 2 amp., drop-through, **14/-**.

Drop-thro' 350-0-350 v. 70 mA., 6 v. 2.5 amp., 5 v. 2 amp., **14/6**.

280-0-280, semi-shrouded drop-through, 80 mA., 6 v. 3 amp., 5 v. 2 amp., **16/6**.

Semi-shrouded, drop-thro' 280-0-280, 80 mA., 4 v. 6 amp., 4 v. 2 amp., **12/6**.

Auto-wound, H.T. 280 volts at 160 mA., 4 v. 3 amp., 2 v. 3 amp., or 6 v. 3 amp. Separates 4 v. 3 amp., rectifier winding (upright or drop-through), **10/6**.

350-0-350, 120 mA., 4 v. 4 amp., 4 v. 1 amp., drop-through, **21/-**.

Auto-transformer, various combinations of voltages including 110 v. 70 watts, and 3/4 volt windings at 1 amp., 2 volt 1 amp., drop-through or upright mounting, **10/6**.

250-0-250, 60 mA. 6 v. 3 amp., **12/6**

250-0-250, 80 mA. 6 v. 4 amp., **14/-**

Pri. 230 v. Sec. 200-0-200 35 mA. 6 v. 1 amp., **8/6**.

Pri. 200/250 v. secondary 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24 and 30 volt at 2 amps., **13/-**.

Heater Transformer, Pri. 230-250 v. 6 v. 1½ amp., **6/-**; 2 v. 2½ amp., **5/-**. P. and P. each 1/-.

P.M. SPEAKERS (Closed field)

	with trans.	less trans.
2½in.	—	15/6
3½in.	—	13/6
5in.	16/6	12/6
6½in.	16/6	12/6
8in.	18/6	15/-

P. and P. on the above 1/- each. 10in. less trans. **25/-**. P. and P. 1/6.

R. & A. 8in. M.E. Speaker field coil 1,600 ohms, O.P. trans. 5,000 ohms impedance, **18/6**. Post and packing 2/-. Rola 8in. P.M. with O.P. trans., **16/6**.

6½in. Energised Television Speaker by PLESSEY. Field resistance 68 ohms with hum bucking coil. Will pass up to 300 mA., require minimum 200 mA. to energise. These are cheaper than a T.V. choke. **9/6** each. 2 for **18/-**.

Volume Controls, by famous manufacturer. Long spindle less switch, 50K., 500K., 1 meg., **2/6** each. P. & P. 3d. each.

B.T.H. Crystal Diode wire ends, **2/3**, post paid.

Expanded aluminium speaker fret, 13½ x 9in., **2/-**.

Line and E.H.T. Trans. 7 kv. U37 rec. winding, extra turns can be wound for EY 51 (8 turns), or for voltage doubling up to 14kv., **19/6**. P. and P. 1/6.

Volume Controls by famous manufacturer. Long spindle and switch, ¼, ½, 1 and 2 meg., **4/-** each. 50 K., **3/6** each. Ganged control 3K and 5K, **3/6**. Post and packing 3d. each.

Trimmers, 5-40 pf., 5d.; 10-110, 10-250, 10-450 pf., **10d.**

Ceramic P.F.S. 1 each of the following, 330, 220, 180 and 82, **2/6**.

Twin-Gang .0005 Tuning Condenser, **5/-**. With trimmers, **7/6**. P. & P. 1/-.

D. COHEN

RADIO & TELEVISION COMPONENTS

SPECIAL OFFER—LIMITED QUANTITY
GARRARD AUTOMATIC RECORD CHANGER UNIT, model RC72A, type RC72A AC, A.C. mains 100/250 v. Complete with two pick-up heads. **£11 15/-**, post paid.

WALNUT BAKELITE CABINET size 17½ x 12 x 8in., complete with 3-wave band scale, size 8½ x 3½in., 5 valve superhet chassis with I.F., valve holder and transformer cut-outs, pointer, drum, drive spindle, 4 knobs, 2 scale clips, 3 pulley wheels, two brackets, scale pan and back. **DESPATCHED TO ENGLAND ONLY, 31/-**, post paid.

CONSTRUCTOR'S POLISHED CABINET. Size 10 x 6½ x 5in. approx., supplied in flatted form grooved and ready to glue together. Complete with plastic front, 3-valve chassis, size 8½ x 4 x 1½in., tunnie scale, backplate and back. Illustration as it would look when assembled. Two knobs not supplied. **10/-**. P. & P. 1/6.

TWIN-GANG AND PAIR OF TRF COILS with circuit to suit above, **8/6**.

EX-GOVT. MARCONI CR.100 COMMUNICATION RECEIVER COIL UNIT, 10-2,000 metres (approx.) in 5 bands complete with 4-gang condenser, 5 I.F.s, 1 osc. coil and crystal, **27/6**. P. & P. 3/-.

MAINS TRANSFORMER, semi-shrouded drop-through 200/250v. primary; secondary 280-0-280 250 mA., 6 v. 6 amps., 5 v. 3 amps., **29/6**. P. & P. 3/-.

EXTENSION SPEAKER CABINET in polished walnut. Size, 15½ x 13 x 7½in., complete with Elac 10in. P.M., **35/-**, plus 2/6 post and packing. This cabinet would accommodate 1155 power pack.

WATERHOUSE 5in. EXTENSION SPEAKER, complete with vol. control, in gold and green, **22/6**. P. & P. 1/-.

MAINS OR BATTERY SUPERHET PORTABLE COILS. Comprising medium-wave frame aerial and long-wave loading coil, used as aerial coils. Midget iron-cored screened L.M. osc. coils, complete with circuit. I.F. frequency 465 Kc. **9/6**.
465 KC. MIDGET I.F.s. Q 120, size 1¼in. long, 1in. wide, ¾in. deep by very famous manufacturer. Pre-aligned adjustable iron-dust cores, per pair, **12/6**.
Both these items **£1**, post paid.

CONSTRUCTOR'S PARCEL comprising chassis 8in. x 4in. x 1½in., with speaker and valveholder cut-outs, 5in. P.M. speaker with transformer, twin gang with trimmers, pair T.R.F. coils long and medium, iron-cored, four valveholders, 20 K. volume control and wave-change switch, **23/-**. P. & P. 1/6.

6 IRON-CORED COILS on Aladdin formers 13.5-50 metres, 198-550 metres 950-2,000 metres. Tuned with a .0005 gang, I.F. frequency 465 Kc. Complete with circuit, **8/6**.

OUTPUT TRANSFORMERS. Standard type 5,000 ohms imp., 2 ohms speech coil, **4/9**; 42-1 speech coil 2-ohm with extra feed-back winding, **4/3**; Miniature 42-1 2-ohm speech coil, **3/3**. Multi-ratio 3,500, 7,000 and 14,000 2-ohm speech coil, **5/6**.

Twin-gang .0005 with separate 75 pf. on each section for S.W. tuning with feet, size 3½ x 3 x 1¾in., **6/6**.
Television Chassis. Size 9½ x 9½ x 3½in., 18 gauge steel cadmium plated complete with 5-coil cans size 1½ x 1in. with iron-cored former. These are wound for television frequency, **6/6**. P. & P. 1/6.
Push-back connecting wire. Doz. yds. **1/6** post paid.

Standard Wave-change Switches. 6-pole 3-way, **2/-**; 4-pole 3-way, **1/9**; 5-pole 3-way, **1/9**; 3-pole 3-way, **1/9**; 9-pole 3-way, **3/6**; Miniature type, long spindle, 3-pole 4-way, 5-pole 2-way, 4-pole 3-way, **2/6** each. P. & P. 3d.
Line Cord. 3-way 0.3 amp. 180 ohms, per yard, **1/3** per yard.
Television Coils wound in alican, size 2½ x ¾in. with former and iron core, 1/- each.

32 mfd., 350 wkg. **2/6**
16 x 24, 350 wkg. **5/-**
4 mfd., 200 wkg. **1/3**
40 mfd., 450 wkg. **3/9**
16 x 8 mfd., 500 wkg. **5/-**
16 x 16 mfd., 500 wkg. **5/9**
8 x 8 mfd., 450 wkg. **3/6**
1 mfd., 500 v. wkg. **1/6**
32 x 32 mfd., 350 wkg. **6/-**
32 x 32 mfd., 350 wkg. and 25 mfd., 25 wkg. **6/6**
25 mfd., 25 wkg. ..... **11d.**
250 mfd., 12 v. wkg. **1/-**
16 mfd., 500 wkg., wire ends **3/3**
8 mfd., 500 v. wkg., wire ends **2/6**
8 mfd., 350 v. wkg., tag ends **1/6**
50 mfd., 25 v. wkg., wire ends **1/9**
10 x 6 x 2 x 2 mfd., 500 v. wkg. **5/-**
50 mfd., 250 v. wkg. **1/9**
Ex-Govt. 8 mfd., 500 v. wkg., size 3½ x 1½, 2 for **2/6**
60 + 100 mfd., 280 v. wkg. **7/-**
16 x 32 mfd., 350 wkg. **6/-**
50 mfd., 180 wkg. **1/9**
65 mfd., 220 wkg. **2/6**
4 + 4 + 4 mfd., 350 wkg. **2/6**
8 mfd., 150 wkg. **1/6**

Frame Oscillator Blocking Transformer, 4/6.
Frame O.P. Transformer. Inductance 10 hy. ratio 10 : 1, **9/6**.
Tube Mounting Bracket, size 9½ x 4½in., with 4½in. dia. cut-out, in 18 gauge cadmium plated steel and 12in. tube clamps, **2/-**.
Smoothing Choke, 2 henry 150 mA., **3/6**.
Smoothing Choke, 250 mA. 4 henry, **5/-**; 250 mA. 5 henry, **6/-**.
P.M. Focus Unit for Mazda tube, **15/-**. P. & P. 1/6. Similar to above with front adjustment, **2/6** extra.
P.M. Focus Unit for any 9in. or 12in. tube, 35 mm. neck, except Mazda 12in., state tube **12/6**.
Similar to above, but with front adjustment, **2/6** each extra.
Ion Traps for Mullard or English Electric Tubes, **5/-**, post paid.
Pre-Aligned Midget 465 Kc. Q. 120, **9/-** per pair, post 6d.
465 Kc. I.F.s, size 2½ x 1¾in. Q.110 removed from American equipment, **5/-** per pair.
Iron-Cored 465 Kc. Whistle Filter, 2/6.
Standard 465 Kc. I.F.S. Q.120, iron-cored, 3½ x 1¾ x 1¾in., per pair, **9/6**.
Television Masks. White Rubber, 9in. with glass, **7/6**. Cream rubber, 12in. with armour plate glass, **15/-**; 15in. white rubber mask, soiled, **12/6**, plus 1/6 P. and P.
Valve Holders. Paxolin international octal, **4d.** each. Moulded international octal, **7d.** each. EF50 ceramic, **7d.** each. Moulded 87G, slightly soiled, **6d.** each, 88A, **7d.** each.
Two-piece Octal Screening Can, 9d. P. and P. 3d.
Three-bank, 50 pf., **1/3**. Four-bank, 50 pf., **1/8**.
AMPLIFIER CHASSIS, 18 gauge aluminium, 5 valve holders, transformer and 2 electrolytic cut-outs, size 11½ x 7½in., sloping front, **4/-** each.
Twin Gang Midget .00037 with perspex, dust-cover and trimmers, **8/6**. Post and pkg. 6d.
Mains Droppers, 0.3 amp., 460 ohms, tapped 280 and 410, **1/6**; 0.2 amp., 717 ohms, tapped at 100 ohms, vitreous, **1/6**; 0.3 amps., 950 ohms, tapped 700 and 825, **2/6**; 0.2 amp., 1,000 ohms, vitreous, tapped, **2/6**. Vitreous .3 amp. 700 tapped 680, 640, 600, **3/6**. P. and P. on each 3d.
3-gang .0005 with separate 75 pf. on each section for S.W. tuning with feet, size 4½ x 3 x 1¾in., **7/6**.

Terms of Business: Cash with order. Despatch of goods within 3 days from receipt of order. Where post and packing charge is not stated please add 1 - up to 10 -, 1/6 up to £1, and 2 - up to £2. All enquiries and Lists. S.A.E.

SPECIAL NOTE: NO GOODS SENT WHERE CUSTOMS DECLARATION IS APPLICABLE.

23 HIGH STREET (Uxbridge Road) ACTON, W.3

Hours of Business: Saturdays 9—6 p.m. Wednesday 9—1 p.m. Other days 9—4.30 p.m. *Telephone: ACOrn 5991*

Terms C.W.O. or C.O.D. No C.O.D. under £1. Postage 1- extra under £1, 1/6 extra under £3.

RADIO SUPPLY CO.

15 Wellington Street, Leeds 1 Tel. 22153

Open to callers: 9 a.m. to 5.30 p.m. Saturdays until 1 p.m.
FULL PRICE LIST 5d.
TRADE LIST 5d.
Please enclose S.A.E. with All Enquiries

SPECIAL OFFERS. Midget Mains Transformers (size approx. 2½ 3-3in.), drop-through chassis type. Screened primary 220/240 v. 50 c/s. Outputs 250-0-250 v. 60 mA, 6.3 v. 2.5 a. Suitable for 6 × 5 rectifier and up to 4 other valves. Only **10/9.** Small Filament Transformers 220-240 v. input, 6.3 v. 1.5 a. output **5/9.** New boxed ex-Govt. valves VR126 (4 v. 7-pin H.F. Pentode), **1/9** each.

BATTERY SET CONVERTER KIT. All parts for converting any type of Battery Receiver to A.C. mains 200-250 v. 50 c/s. Kit will supply fully smoothed H.T. of 120 v. 90 v. or 60 v. at up to 40 mA, and fully smoothed L.T. of 2 v. or 1.4 v. at up to 1 amp. Price complete with circuit only **45/9.**

H.T. ELIMINATOR & TRICKLE CHARGER KIT. Consists of h.t. and l.t. transformers, h.t. and l.t. rectifiers, smoothing electrolytic and resistor, adjustable charger resistor. Supplied complete with circuit. Only **29/9.**

H.T. ELIMINATOR KIT consisting of Mains Transformer (200-250 v. input), smoothing choke, metal rectifiers, Electrolytic 30 + 50 mfd., tapped adjustable Resistor, Chassis and Circuit. Unit will supply a maximum of 120 v. 40 mA. Price **21/9.**

BATTERY CHARGER KITS
To charge 6 or 12 v. acc. at 3 a., **29/6.**
To charge 6 or 12 v. acc. at 4½ a., **45/-.**
Above consists of transformer, bridge rectifier and adjustable resistor. Circuit supplied.

COAXIAL CABLE, 75 ohms, ¼in., **11d.** yd.

DIAL BULBS, M.E.S. 6.5 V 0.15 A, 8 V 0.15 A, **6/9** dozen.

NEW EX-GOVT. VALVES

6K6GT	5/11	12H6 Met	1/11
7V7	6/9	12SH7 Met.	5/9
954	1/11	OZ4	7/9
VU120A	2/9	EF50	6/6
4SH	7/6	VT61A	1/11
MHLD6	9/6	RK34	1/11

ELECTROLYTICS (Current production. Not ex-Govt.)

Tubular Types		Can Types	
8μF 350 V	1/6	16μF 450 V	2/9
8μF 450 V	1/11	24μF 350 V	2/11
8μF 500 V	2/9	32 mfd 350 V	3/3
16μF 350 V	2/3	32μF 450 V	4/3
16μF 500 V	3/9	40μF 450 V	4/3
24μF 350 V	3/6	50μF 350 V	4/9
32μF 350 V	3/9	8-8μF 450 V	3/11
8-16μF 500 V	4/11	8-8mfd 500 V	4/9
25μF 12 V	10d.	8-16μF 450 V	4/6
25μF 25 V	1/3	16-16μF 450 V	4/11
25-25 mfd 25 V	1/9	16-16 mfd 500 V	5/9
25 mfd. 50 V	1/6	16-32μF 350 V	4/11
50 mfd 25 V	1/9	32-32μF 350 V	5/11
50μF 12 V	1/3	32-32μF 450 V	6/11
50μF 50 V	2/3	50-50μF 350 V	5/11
250 mfd 12 V	10d.	16-32mfd 450 V	5/9

CAN TYPES

32-32-8μF 350 V (small)	5/11
16-16-8mfd. 475 V	5/9
16-16mfd. 450 V Plus 20 mfd. 25 V	5/3
32-32μF 350 V plus 25μF 25 V	4/11
50μF 350 V plus 250μF 12 V	4/11

CHASSIS. 16 swg. Undrilled Aluminium. Receiver Type 10 × 5½ × 2in., **3/9**; 11 × 6 × 2½in. **4/3**; 12 × 8 × 2½in., **5/3**; 16 × 8 × 2½in., **7/6**; 20 × 8 × 2½in., **8/11**; Amplifier Type (4 sided), 12 × 8 × 2½in. **7/11**; 16 × 8 × 2½in., **10/11**; 14 × 10 × 3in., **12/6**; 20 × 8 × 2½in., **13/6.**

ALUMINIUM PANELS. 18 s.w.g. 18 × 12in., **5/6**; 18 × 18in., **8/3.**

SILVER MICA CONDENSERS. 5μμF, 10μμF, 15μμF, 20μμF, 25μμF, 30μμF, 35μμF, 50μμF, 125μμF, 150μμF, 180μμF, 300μμF, 240μμF, 200μμF, 330μμF, 400μμF, 470μμF, 500μμF, 1,000μμF (.001μF), 200μμF (.002μF). All at **8d.** each. **3/9** dozen one type.

TUBULAR WIRE-ENDED CONDENSERS. (New Stock.) .001 mfd., 750 V, .002 mfd., 750 v., .003 mfd., 750 V, .005 mfd., 500 V, .01 mfd. 750 V, .05 mfd., 450 V, .1 mfd., 350 V, .25 mfd., 350 V, .5 mfd., 350 V. All at **4d.** each, **3/3** doz. one type, **27/6** gross.

CABINETS, BAKELITE (Brown or White) or **WOOD** (Walnut veneered). Size approx. 12 × 6½ × 5in. Very attractive appearance. Supplied complete with fully punched T.R.F. 3-valve Chassis, back, 2 or 3 wave. Glass scale with coloured station names. Dial Backplate. **25/-**, plus carr. 2/6.

YOU CAN BUILD a 2-wave T.R.F. receiver in above cabinets for less than £5. We can supply a pair of Weymouth 2-wave coils with circuit. Price **9/6.** We have good stocks of all items in the circuit drawing.

CLEARANCE LINES. 0005 mfd. 2-gang variables, **4/6.** Vol. controls, Midget, 1 meg. with long spindle and S.P. switch, **2/9.** Standard 100 K with 1in. spindle and D.P. switch, **2/9.**

EX-GOVT. ITEMS. Pye coaxial plugs and sockets **7/6** doz. prs. Belling-Lee moulded type 5-pin and 10-pin plugs and sockets, **1/11** pr. Smoothing Chokes, tropicalised, 100 mA 8 H, 100 ohms, 50 mA 50 H 1,000 ohms, **4/6** each. .02 mfd. 5,000 v. B.I. Tubulars, **1/9.** Coil Formers ¼in. with slug **3/9** doz.

FOR CALLERS ONLY. Mains Trans., drop-through type with top shroud. Primary 230-250 v. Secs. 425-0-425 V, 200 mA, 300-0-300 V 100 mA, 6.3 V 2 A, 6.3 V 2 A, 5 V 3 A, **29/9.**

VOLUME CONTROLS with long spindles, all values, less switch, **2/9,** with S.P. switch, **3/11. WIRE WOUND POTS:** 20 ohms, 2.5 K, 5 K, 20 K, 50 K (medium length spindles), **1/11.**

P.M. SPEAKERS. All 2.3 ohms, 5in. F.W., **12/9**; 5in. Goodmans, **13/9**; 6½in. F.W., **14/11**; 6½in. Goodmans, **15/9**; 8in. Plessey, **15/9**; 8in. Rola **16/9**; 10in. Goodmans, **29/9.**

M.E. SPEAKERS. (2-3 ohms.) 8in. R.A. Field 600 ohms, **12/9**; 6½in. Rola Field 700 ohms, **12/9.**

R.S.C. MAINS TRANSFORMERS

Fully Guaranteed. Interleaved and Impregnated.

Primaries 200-230-250 V. 50 c/s Screened.

TOP SHROUDED, DROP THROUGH

250-0-250 V 70 mA, 6.3 V 2 A, 5 V 2 A, Midget type 2½-3-2½in.	15/6
260-0-260 V 70 mA, 6.3 V 3A, 5 V 2 A	15/6
260-0-260 V 80 mA, 6.3 V 2 A, 5 V 2 A	15/6
350-0-350 V 80 mA, 6.3 V 2 A, 5 V 2 A	17/9
350-0-350 V 90 mA, 6.3 V 3 A, 2 V 2 A	21/9
250-0-250 V 100 mA, 6.3 V 4 A, 5 V 3 A	23/9
300-0-300 V 100 mA, 6.3 V-4 V 4 A c.t., 0-4-5 V 3 A	23/9
350-0-350 V 100 mA, 6.3 V-4 V 4 A, c.t. 0-4-5 V, 0-4-5 V 3 A	23/9
350-0-350 V 120 mA, 6.3 V 4 A, 5 V 3 A	28/9
350-0-350 V 150 mA, 6.3 V 4 A, 5 V 3 A	29/11
350-0-350 V 150 mA, 6.3 V 2 A, 6.3 V 2 A, 5 V, 3 A	29/11

CLAMPED UPRIGHT MOUNTING

250-0-250 V 80 mA, 6.3 V 3 A, 5 V 3 A	17/9
250-0-250 V 100 mA, 6.3 V 6 A, 5 V 3 A, for R1355 conversion	26/9
350-0-350 V 100 mA, 6.3 V 6 A, 5 V 2 A	21/6

FULLY SHROUDED UPRIGHT

250-0-250 V 60 mA, 6.3 V 2 A, 5 V 2 A, Midget type 2½-3-3in.	17/6
350-0-350 V 70 mA, 6.3 V 2 A, 5 V 2 A	18/9
250-0-250 V 100 mA, 6.3 V-4 V 4 A, c.t., 0-4-5 V 3 A	25/9
300-0-300 V 100 mA, 6.3 V-4 V 4 A, c.t., 0-4-5 V 3 A	25/9
350-0-350 V 100 mA, 6.3 V-4 V 4 A, c.t., 0-4-5 V 3 A	25/9
350-0-350 V 150 mA, 6.3 V 4 A, 5 V 3 A	33/9
350-0-350 V 150 mA, 6.3 V 2 A, 6.3 V 2 A, 5 V 3 A	33/9
350-0-350 V 160 mA, 6.3 V 6 A, 6.3 V 3 A, 5 V 3 A	45/9
350-0-350 V 250 mA, 6.3 V 6 A, 4 V 8 A, 0-2-6 V 2 A, 4 V, 3 A, for Electronic Eng. Televisor	67/6
425-0-425 V 200 mA, 6.3 V 4 A, c.t., 6.3 V-4 V 4 A, c.t. 0-4-5 V 3 A, suitable Williamson Amplifier, etc.	51/-
425-0-425 V 250 mA, 6.3 V 6 A, 6.3 V 6 A, 5 V 3 A	65/6
325-0-325 V 20 mA, 6.3 V 0.5 A, 6.3 V 1.5 A, for Williamson Preamplifier	17/6

E.H.T. TRANS. 2,500 V 2-0-2 V 1.1 A, 2-0-2 V 1.1 A, for VCR97, etc. 37/6

FILAMENT TRANSFORMERS
All with 200-250 V 50 c/s primaries: 6.3 V 2 A, **7/6**; 0-4-6.3 V 2 A, **7/9**; 12 V 1 A, **7/11**; 6.3 V 3 A, **10/11**; 6.3 V 6 A, **17/6**; 0-2-4-5-6.3 V 4 A, **16/9**; 12 V 3 A or 24 V 1.5 A, **17/6**; 0-5-6.3 V 5 A, four times, giving up to 24 V 5 A up to 12.6 V 10 A, up to 6.3 V 20 A, by series or parallel connections, **55/-.**

CHARGER TRANSFORMERS
All with 200-220-250 V 50 c/s Primaries: 0-9-15 V 1.5 A, **13/9**; 0-9-15 V 3 A, **16/9**; 0-9-15 V 6 A, **22/9**; 0-4-9-15-24 V 3 A, **22/9**; 0-9-15-30 V 3 A, **23/9.**

SMOOTHING CHOKES

250 mA, 8-10 H, weight 12 lb	16/9
250 mA, 3 H, 50 ohms	8/9
200 mA, 5 H, 200 ohms	7/6
100 mA, 10 H, 200 ohms	7/6
80 mA, 10 H, 350 ohms	5/6
60 mA 20 H, 1,000 ohms	5/6
60 mA 10 H, 400 ohms	4/11
40 mA 5 H, 150 ohms	3/6
20 mA 50 H, 1,000 ohms	10/6
1 A .25 H, L.T. type	4/9

ELIMINATOR TRANSFORMERS

Primaries 200-250 V 50 c/s, 120 V 40 mA	7/11
120-0-120 V 30 mA, 4 V ½ A	12/9

OUTPUT TRANSFORMERS

Midget Battery, Pentode 66 : 1 for 2S4, etc.	3/9
Small Pentode, 5,000Ω to 3Ω	2/11
Standard Pentode 5,000 ohms to 3 ohms	4/9
Standard Pentode, 8,000Ω to 3Ω	4/9
Multi ratio 40 mA, 30 : 1, 45 : 1, 60 : 1, 90 : 1, Class B Push-Pull	5/6
Push-Pull 10-12 Watts 6V6 to 3Ω or 15Ω	15/11
Push-Pull 10-12 Watts to match 6V6, etc., to 3-5-8 or 15Ω	16/9
Push-Pull 15 Watts to match 6L6, etc., to 3Ω or 15Ω Speaker	22/9
Push-Pull 20 Watts, High Quality, sectionally wound, 6L6, KT66, etc., to 15Ω	51/9
Williamson type exact to author's spec.	55/-

WE CAN QUOTE FOR QUANTITIES OF STANDARD OR SPECIAL TYPES. S.A.E. PLEASE WITH ALL ENQUIRIES.

OUR 17th YEAR. OUTSTANDING VALUE FOR MONEY



AIR MINISTRY COMMUNICATION RECEIVERS R1155 Brand New in wood transit cases. Aerial Tested before despatch. Supplied complete with 10 valves and reprint of "Wireless World" data describing easy conversion for civilian use. Ranges 18.5-7.5 mc/s. 7.5-3 mc/s. 1500-600 kc/s. 500-200 kc/s. 230-75 kc/s. OUR PRICE £9 10 -. Carr. 10/-

1155 POWER PACK AND OUTPUT STAGE. Not surplus. Complete with U50 and KT61 valves. Specially manufactured by us for the above receiver. Incorporates full power supply and output stage with built-in 5in. P.M. speaker and 'phone jack. Made to "Wireless World" specification. Connections terminate in Jones plug which simply plugs into receiver which is then instantly operated from 230 v. A.C. Housed in an attractive black crackle cabinet size 12in. × 8in. × 5in. which matches in appearance with receiver. Finest branded components only used throughout. Price £7 10 -, plus 3/6 carriage.



G.E.C. VHF 10-VALVE RECEIVERS. Complete with 10 valves as follows. H.F. and 1st Det. stages. ZA2, 954's or EF50's Local Oscillator DET 19. Three I.F. stages KTW63's. Det. and A.V.C. D63. LF H63. Output KT63. Noise suppressor D63. Power requirements. 6 v. 3 a., 270 v. 80 mA. Available in three separate frequency ranges. Be sure to state which you want.
Range "A" 128-131 mc/s. "B" 95.5-100 mc/s. 78.5-82 mc/s. Intermediate Frequency adjustable 8.3-9.8 mc/s. Oscillator Crystal controlled. (Crystal not supplied.) Sensitivity 3 microvolts for 50 MW. audio output. 30% modulation at 130 mc/s. Input impedance 72 ohms. Housed in grey enamel steel case with lid 10in. × 8in. × 7in. Weight 22lb. Note the price, 49 6, plus 5/- carriage. (We had to buy 400 to sell at this price.)

C.3 VOLTAGE CONTROL UNIT. Ref. No. 5U 1259. Contains on off switch, pilot light, 6 bank fuse panel, 5 plus 3 mfd. Heavy duty mains suppressor. Handsome case. Size 11 - 8 - 7½in. **10 -** each, carr. 2/6

PAMPHONIC P.A. SPEAKERS. 10in. high flux unit (not surplus). Handsome maroon cellulose metal cabinet 20 - 9 - 13in., impedance 3 ohms. Price **£4 . 4 . 0**, carr. 4/-

CONTROL UNIT 454A. Brand new in sealed packing. Size 8½ × 6½ × 3½. Fitted 0-1 mA meter, four 50k pots, 1 5k pot., 1 250k pot., 1 D.P. toggle switch, 3 jewel light tacks, 1 G.P.O. type 2-pole switch, 1 Yaxley 5 pole switch. Suitable basis for test meter. Price **30 -**, carr. paid.

WANTED
ET4336 TRANSMITTERS.
BC221 FREQUENCY METERS.
AR88 EDDYSTONE RECEIVERS.
We invite offers of the above. Highest Cash Paid. Don't waste time and money advertising. We are also eager buyers of bulk lots from Dealers and Manufacturers.

VIEWMASTER TELEVISION COMPONENTS
EXCELLENT STOCKS. PROMPT DELIVERY.

W8200 Video Chassis	18 6
W8101 Video Chassis Supports	6 -
W8102 Time Base and Power Chassis	18 6
W8103 Mains Transformer	42 -
W8103A Auto Transformer	52 6
W8104 Smoothing Choke	15 6
W8105 5707T Loudspeaker	32 6
W8300 Pre-Amp. Chassis	17 6
12in. Conversion Assembly	35 -
W8106 Frame Transformer	25 6
W8107 Line Transformer	32 6
W8108 Scanning Coil	33 6
PM Focus Rings. R25 6 for 12in. Triode	22 6
W8110 Width Control	10 -
W8111 Boost Choke	5 9
W8112 Front and Rear Tube Support, 9in., 21 - ; Ditto, 12in.	21 6

Ediswan-Morganite Resistors:

No. 40A London. 65 Resistors. Exact values	36 3
No. 40B Midland. 63 Resistors. Exact values	35 3
No. 40C Holme Moss. 63 Resistors. Exact values	35 3
Ediswan-Morganite Variable Resistance Type Q. each	5 -
Colvern Pots. Kit of 6	22 6
Bulgin No. 7 Aerial Connector, Switch, Tag Boards, etc.	14 -
Telling Lee L707 Mains Connector Unit	7 6
G.E.C. Neon Ind. Type G	3 6

Viewmaster Coils and Choke:
London, 19 6; Midland or Holme Moss, 21 6; Viewmaster Envelope (specify area), 7 6; TCC Condensers, London. Exactly as specified, £7; Midland or Holme Moss £7 7 -.

We can give prompt delivery from stock of all items. All post paid.

200 Brand New Sperry Directional Gyros. 106A 170 (640370). For EXPORT only. Attractive Price

Many items previously advertised still available.

SATISFACTION IS UNCONDITIONALLY GUARANTEED BY US AND MONEY WILL BE REFUNDED IN FULL ON ANY GOODS RETURNED CARRIAGE PAID WITHIN 7 DAYS

H. P. RADIO SERVICES LTD.

Britain's Leading Radio Mail Order House.
55 County Road, Walton, Liverpool, 4
Tel. Aintree 1445. Established 1935

THE A.C. MAINS R.1155 COMMUNICATIONS RECEIVER
This famous Bomber Command Receiver now available complete with power pack, output stage, and speaker, ready to operate. Just plug in and receive the world, with a receiver of the £100 class. Wave ranges covered are 18.5-7.5 mc/s., 7.5-3.0 mc/s., 1500-600 kc/s., 500-200 kc/s., 200-75 kc/s. Every set is thoroughly tested and checked before despatch, and is BRAND NEW AND UNUSED IN THE MAKERS' TRANSIT CASE. ONLY **£16 19 6** complete (carriage etc. 15/6) OR **BRAND NEW RECEIVER ONLY, £11 19 6** (carriage 10/6). **POWER PACK, OUTPUT STAGE AND SPEAKER** ready to plug on to any R.1155, ONLY **£5 10 -** (carriage etc. 5/-). BUY THE COMPLETE RECEIVING STATION AND SAVE 10/-.

I.F. STRIP TYPE 194. An easily modified I.F. Strip recommended for T.V. constructors who want good results at moderate cost, or for those who have built televisors but are having trouble in the vision or sound receivers. Can also be modified for 2 Channel working as per details in "Practical Television" October issue. This 6-stage strip measures 18in. x 5in. x 3in. and contains 6 valves: VR65, 1 of VR92, and 1 of VR53 or VR56. Mod. data supplied. BRAND NEW. ONLY **45 -** (postage, etc., 2/6).

RDF 1 RECEIVER. A very powerful 14-valve receiver with 4 I.F. stages of 12 mc/s. width 4 mc/s. bandwidth. Will convert into a first-class T.V. receiver for 2 Channel working as described in "Practical Television," October and November issues, a reprint being supplied. Valve line-up: 5 of SP61, 2 of P61, 3 of EA50, and 1 each CV63, EB34, EC52, 5Z4G. ONLY **49 6** (carriage, etc., 5/-).

R.1355 RECEIVER. The very popular unit specified for "Inexpensive Television," a copy of which is supplied. Complete with 8 valves VR65, and 1 each 5U4G, VU120, VR92. BRAND NEW IN MAKERS CASES. ONLY **39 6** (carriage etc. 7/6).

RF UNIT 24. For use with the above receiver, full details being supplied of simple modification necessary to cover all the TV Stations. ONLY **25 -** (postage etc. 2/-). OR
R.1355 COMPLETE WITH RF 24 ONLY **59 6** (carriage etc. 7/6)

INDICATOR UNIT TYPE 6. Contains 6in. C.R. Tube VCR 97, 4 valves EF 50, 1 of EB 34, and 1 of EA 50. The unit recommended for conversion to the "Wireless World" General Purpose Oscilloscope, full details supplied (or available separately 1/-). ONLY **79 6** (carriage etc. 7/6).

"PYE" 45 Mc/s STRIP. The strip which ready made for London Vision Channel. Complete with 6 valves EF50 and 1 EA50 and details of very slight mods. necessary. **ONLY 70 -** (postage, etc. 2/6).

100 MICROAMPS METER. 2½in. Flush Mounting. Widely calibrated scale of 15 divisions marked "Yards," which can be re-written to suit requirements. These movements are almost unobtainable to-day, and being BRAND NEW IN MAKERS CARTONS are a "snip" at ONLY **39 6.**

50 MICROAMPS METER. 2in. Flush mounting. Another movement which is in short supply and is also BRAND NEW IN MAKERS CARTON. ONLY **45 -.**

VCR 97 CR TUBES. All guaranteed tested full screen for Television use. In makers crates. ONLY **45 -** (carriage paid).

6in. MAGNIFYING LENS FOR VCR 97 TUBE. First grade oil filled. ONLY **25 -** (postage 2/-).

TRANSFORMERS. Manufactured to our specification, and fully guaranteed. Normal Primaries.
425-0-425 v. 200 mA., 6.3 v. 6 a., 6.3 v. 6 a., 5 v. 3 a., 0-2-4-6.3 v. 3 v. 3 a. ONLY **72 6.**
425-0-425 v. 200 mA., 6.3 v. 4 a., 6.3 v. 4 a., 5 v. 3 a. ONLY **50 -.**
350-0-350 v. 160 mA., 6.3 v. 6 a., 6.3 v. 3 a., 5 v. 3 a. ONLY **42 6**
250-0-250 v. 100 mA., 6.3 v. 6 a., 5 v. 3 a. ONLY **32 6.**
The above are fully shrouded upright mounting.
Universal Mounting 350-0-350 v. 80 mA., 0-4-6.3 v. 4 a., 0-4-5 v. 2 a. ONLY **18 6.**
Universal Mounting 250-0-250 v. 80 mA., 0-4-6.3 v. 4 a., 0-4-5 v. 2 a. ONLY **15 6.**
The following are upright mounting.
EHT for VCR 97 Tube, 2,500 v. 5 mA., 2 v.-0-2 v. 1.1 a., 2 v.-0-2 v. 2 a. ONLY **37 6.**
EHT 5,500 v. 5 mA., 2 v. 1 a., 2 v. 1 a. ONLY **72 6.**
EHT 7,000 v. 5 mA., 4 v. 1 a. ONLY **82 6.**
PLEASE ADD 1/6 PER TRANSFORMER POSTAGE.

TRANSFORMER, for a variety of uses giving outputs of 3 v., 4 v., 5 v., 6 v., 8 v., 9 v., 10 v., 12 v., 15 v., 18 v., 20 v., 24 v., 30 v., at 2 amps. from normal mains input. ONLY **17 6** (postage 1/-).

TRANSFORMERS. Ex-W.D. and Admiralty, built to more than 50 per cent safety factor, with normal A.C. Mains Primaries. All Brand New and Unused.
300-0-300 v. 200 mA., 5 v., 3 a., 6.3 v., 5 a., C.T., 20 v. 750 mA., 70 v. 100 mA. Weight 12 lbs. ONLY **42 6** (postage etc. 2/6).
330-0-330 v. 100 mA., 4 v. 3 a. Weight 7 lbs. ONLY **22 6** (postage 1/6).
L.T. 5-0-5 v. 5 a., 5-0-5 v. 5 a., 5-0-5 v. 5 a. By using combination of windings will give various voltages at high current. Weight 11lbs. ONLY **35 -** (postage etc. 2/6).
L.T. 6.3 v. 7.7 a., 4.2 v. 2.5 a., 4 v. 1 a. ONLY **19 6** (postage 1/6).
EHT 1,400 v. 2 mA., 520 v. 10 mA., 300 v. 10 mA., 2 v. 1.5 a. ONLY **21 -** (postage 1/6).

Cash with order please, and print name and address clearly. Amounts given for carriage refer to inland only

U.E.I. CORPORATION

Radio Corner, 138 Gray's Inn Road, London, W.C.1
Phone: TERMINUS 7937.
(Open until 1 p.m. Saturdays. We are 2 mins. from High Holborn (Chancery Lane Station) and 5 mins. by bus from King's Cross.)

For Quality Bargains Always—
Best Buy at BRITAIN'S

THE "N" MODEL

At last we are able to offer this up-to-date version of the famous R1155, and judging by the number of enquiries we have had for this model we advise you to place your order early.

The main differences between this later version and the normal type are the inclusion of the SHIPPING and TOP BAND of 1.5-3 Mc/s (100-200 metres), and the greatly improved super slow-motion drive. In BRAND NEW condition £17/19/6, plus 10/6 carriage and packing in original transit case.

Yachtsmen, Trawler owners, etc. Ask our advice before fitting radio equipment in your vessels. We may be able to save you £££s.

COMMUNICATION RECEIVER Type R1155.
Now world renowned as one of the finest receivers obtainable. For those not familiar with the set we can supply an authoritative "Wireless World" circuit and descriptive leaflet at 1/3 post free. All our receivers are air tested before despatch and are supplied complete with 10 valves. Any receiver gladly demonstrated to callers. The price is **£11/19/6**, and for an additional **10/6** the set is despatched in maker's transit case. ABSOLUTELY BRAND NEW. A few only, slightly used, air tested for only **£7/19/6**, plus 10/6 carriage.

A.C. MAINS POWER PACK/OUTPUT STAGE.
Enables this receiver to be operated direct from A.C. mains. Just plug in and connect low impedance speaker (speaker not included). **£4/10/-**, plus 3/6 carriage. This unit is manufactured by ourselves from first class new components and valves, and is assembled in a neat black case 8½in. x 6½in. x 4in. All the necessary leads and Jones plug supplied and included in the price. NOTE—OUR POWER PACK IS GUARANTEED SIX MONTHS.

££ SAVE MONEY ££

Brand new R1155, A.C. mains Power Pack and Output stage complete for ONLY £15/19/6, plus 12/6 carriage and packing. Offer does not apply to "N" Model.

SHORT WAVE ENTHUSIASTS. We have some special snips for you if you can pay us a visit.

BC45S COMMAND RECEIVER covers 6-9 Mc/s (33-50 metres). Complete with six valves—R.F. 12SK7, FC 12SK8, I.F. 12SK7, I.F. 12SK7, Det. and BFO 12SR7. Output 12A6. Brand new in black crackle case and complete with circuit at **79/6**, plus 2/6 carriage.

MODULATOR TYPE 67. This unit is essentially a heavy duty mains power pack for 230 v. A.C. 50 c.p.s. operation. It contains a heavy duty mains transformer with two 6.3 volt windings, 5 volts and the H.T. is 345-0-345 volts. Heavy duty choke, appropriate smoothing condensers, rectifier, etc., also included. In addition there are sundry SP61 valves, etc., which we haven't listed. Only **72/6**, plus 7/6 carriage.

CALIBRATOR UNIT 115.
This unit is very similar to the above with the heavy duty mains power pack, etc., but the valve line up consists of a 5Z4 and nine EF50s. In BRAND NEW condition, they are a real snip at **82/6**, plus 7/6 carriage.

'SCOPE **Are you making an oscilloscope? If so we have two indicator units which should interest you.**



Type 6 which contains a 6in. C.R.T. Type VCR97, 4 valves EF50, 1 of EB34 and 1 of EA50. The "Wireless World" leaflet containing full details for conversion to general purpose 'scope supplied free with each unit (or available separately 1/- post free). ONLY **79/6**, plus 7/6 carriage.

Type 182A. This is probably better value as it contains more valves and components. The tube employed is your old favourite the VCR517. This is a 6½in. electro-static tube which can be used for 'scope work or gives an exceedingly pleasant picture when used for T.V. It is used in exactly the same manner as the VCR97 and employs the same voltages, base connections, etc. It does not suffer from cut-off and in our opinion gives a picture equal to, or better than, the VCR97. Call during viewing hours and see for yourself. Complete with three EF50s, one 5U4G, four SP61s, etc. (less relay). It is extremely cheap at only **79/6**, plus 7/6 carriage in original transit box. BRAND NEW. "Wireless World" 'scope leaflet supplied free with each unit.

TELEVISION

45 Mc/s "Pye" Strip. A ready-made vision receiver! (London frequency). Uses six of EF50 and an EA50. Complete circuit data provided. BRAND NEW complete with valves **£3/10/-**, plus 2/6 carriage.

R3118 Responser Unit. A 15-valve 1½ metre superhet for A.C. mains 200-250 volts 50 cycles. This unit would be extremely suitable for alteration to T.V. or the Wrotham F.M. transmission. Contains 2-EF54, 1-EC52, 6-SP61, 1-P61, 1-5Z4G, 3-VR92 and 1-Y63, and power pack. Note the price of ONLY **79/6**, plus 7/6 carriage. A REAL BARGAIN.

R1355 Receiver. The justly famous receiver unit specified in the "Inexpensive T.V." book. Valve line-up: 8-SP61, 1-VR92, 1-VU120 and a 5Z4. BRAND NEW for **39/6**, plus 7/6 in transit box.

RF Units for the R1355. We can supply the RF24 or RF25 modified to the frequency you require. Any station, sound or vision for **32/6**, plus 2/6 carriage.

Special Offer of brand new R1355 and RF unit tuned to frequency required for only **£3/10/-** carriage paid. The cheapest way of making that TV set.

6in. Magnifying Lens for the VCR97, 5CP1, etc. First grade, oil filled perspex, special price **22/6**, plus 1/6 post. Almost doubles your picture area.

Coaxial Cable. Brand new 75-80 ohm at 1/- per yard—minimum 10 yds. by post. This is standard ¼in. dia.—not ex-Govt.

T.V. PRE-AMP. Small size. Uses two EF50's, tunes to 45 Mc/s, but coils easily altered to any station. With valves **19/6**. Less valves **10/-**. Post 1/-.

"INEXPENSIVE TELEVISION." This book describes the building of a T.V. set using ex-Govt. equipment. Price **2/9**, post paid.

"T.V. FAULT FINDING" has 80 pages with a large number of photographs taken from a Televisor screen. Price **8/3**, post paid.

"A PRACTICAL OSCILLOSCOPE". Complete constructional data with full-size practical diagrams. Price **2/9** post paid.

TRANSFORMERS

All brand new and unused.

WELDING TRANSFORMER. Input 230 volts, output 12.6 volts tapped at 11 v., 11.5 v. and 12 v. at 70 amps. Weight 40lb. Price only **82/6**, plus 7/6 carriage and packing.

EX-ADMIRALTY MAINS TRANS. Primaries standard 230 volts 50 cycles. Very conservatively rated. (1) 300-0-300 volts 400 m/a., 5 v. 3 a., 6.3 v. 5 a. centre tapped. Size 6in. high x 4¼in. x 4¼in. Upright mounting. Weight 12lb. Price **42/6**. (2) 5-0-5 volts, 5-0-5 volts, 5-0-5 volts all at 5 amps. each winding. This means, in effect, that you can have 5, 10, 15, 20, 25, 30 volts at 5 amps. or other possible combinations. A very useful transformer at only **35/-**, plus 1/6 post.

STANDARD TRANSFORMERS of current manufacture. Two types, both standard primaries. Universal mounting. (1) 350-0-350 volts 80 m/a., 0-4-5 v. 2 a., 0-4-6.3 v. 4 a. (2) 250-0-250 volts 80 mA., 0-4-5 v. 2 a., 0-4-6.3 v. 4 a. Both transformers brand new and boxed, fully guaranteed. Only **18/6**, plus 1/- post.

30-VOLT TRANSFORMER. Standard primary, secondary 30 volts 2 a., tapped to give 3, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24 and 30 volts. Has countless uses, i.e., for chargers, train sets, filament trans., etc. Price **17/6**, plus 1/- post. Brand new and guaranteed.

METERS

50 MICRO-AMP METER. As used in the Adm. Sig. Gen. W6796. 2in. flush mounting. Brand new and boxed at **42/6**.

100 MICRO-AMP. METER. 2½in. flush mounting. Brand new in manufacturer's original cartons. The scale is calibrated in "yards," but can easily be re-written. Very scarce and an exceptional buy at **39/6**.

500 MICRO-AMP. METER. 2in. square, panel mounting. Brand new, original cartons, calibrated 0-500. Bargain at **15/-**.

EF50 (VR91) RED SYLVANIA. American types at **8/6** each. Brand new. British makes also available at **5/-** each, tested. Postage 6d. on 1-4 valves. Many other valves in stock. Ask for quotation.

SPARE C.R.T.s. for the Erskine and G.E.C. Miniscope. Type VCR522 (E4103/B,4). FEW ONLY at **35/-**, plus 1/- post/packing. Base and Mu-metal shield 5/- extra.

HEAVY DUTY RECTIFIERS. Funnel cooled, selenium. Each rectifier has 20 discs size 112 mm. Brand new and boxed at **£4/10/0**, plus 3/6 carriage.

CHARLES BRITAIN (Radio) Ltd.
11 UPPER SAINT MARTIN'S LANE
LONDON, W.C.2 *TEM 0545*

One minute from Leicester Square Station (up Cranbourn Street)
Shop Hours: 9-6 p.m. (9-1 p.m. Thursday). *Open all day Saturday*

UNIVERSITY RADIO LTD.

Offer Guaranteed Used Equipment at Attractive Prices

Soundmirror Portable Tape Recorder, Complete with microphone, as new £57 10 0
M.S.S. P.R.M. 4 Disc Recorder, complete in two metal cases, as new £85 0 0
H.R.O. Senior Rack, mounting model with 7 coils, in perfect condition, with H.R.O. power pack £30 0 0
Wharfedale Golden 10in. Unit, as new £5 10 0
Lowther P.M.2. Unit, as new £20 0 0
Voigt Corner Horn, in perfect condition £42 10 0
Panoramic Adaptor, 455 K.C. model, as new £35 0 0
Evershed's 500 Volt Bridge Megger, as new £35 0 0
Clifton Tape Deck, as new, with circuit diagram £15 10 0
B.2. T.X. and R.X., complete in portable case with all coils £10 10 0
Brierley Ribbon Pick-ups, as new and boxed with transformer £4 10 0
Avo Model 7, as new £14 10 0
Avo Model 40, as new £12 0 0

Eddystone 640 Model, as new ... £22 10 0
Eddystone 750 Model, as new ... £37 10 0
Eddystone 358X, complete with all coils 100 Kcs to 31 Mcs, less power pack, first class condition £15 0 0
Sound Magnet, 3 speed tape recorder with 10 watt amplifier, less microphone £27 10 0
Avo 1948 Roller Panel Valve Tester, as new £12 0 0
Taylor Model 20a Circuit Analyser, complete with probe, as new £10 0 0
Large selection of **Valradio D.C. to A.C. Converters**, all ratings as new, from £7 10 0
Radiovision V.R.55, as new £30 0 0
Latest model **Emidictor**, complete with all accessories, as new £47 10 0
Hammarlund Super Pro 400 m. as new, complete with original power supply and loudspeaker £120 0 0
Sawyer Disc Recording Unit, synchronous type with cutting head and tracking gear, in perfect order £15 0 0

Emidictor Office Dictating Machine, complete with all accessories and trolley, as new... £50 0 0
B.S.R. Professional Recording Amplifier, with mixing for two microphones or one microphone and either gram or radio, bass and treble equalisers, separate output for monitor L.S. D.B. meter which can be used for recording or P.A., as new £38 10 0
German Broadcast Type Condenser Microphones, complete with pre-amplifiers and two heads, in perfect condition £7 10 0
New Professional Tape Recorder, incorporating Wearite tape deck, high fidelity high gain amplifier, in portable leatherette case. Less microphone £120 0 0
Sound Sales 1949-50 DX plus 1, with tone control unit and six watt amplifier, as new £36 10 0
Electronic Key by Electric Eye Equipment Co., U.S.A., as new, in perfect working order £9 10 0

★ We have a large selection of British and U.S.A. Valve Testers, Test Meters and Signal Generators, etc. Your enquiries are welcome. S.A.E. please.

THESE ITEMS ARE ONLY A SMALL SELECTION FROM OUR STOCK OF EQUIPMENT. YOUR ENQUIRIES FOR ANYTHING THAT YOU MAY NEED WILL BE WELCOME. **WE HAVE OTHER EQUIPMENT ARRIVING DAILY!**

CASH OR CHEQUE WITH ORDERS. ALL ITEMS LISTED ARE CARRIAGE EXTRA. S.A.E. PLEASE.

22 LISLE STREET, LEICESTER SQUARE, LONDON, W.C.2

OUR BRANCH AT 39a (opposite) IS OPEN ALL DAY THURSDAY.

Phone: GERrard 4447, 8582 and 5507. Hours 9 to 6. Thursdays 9 to 1.

NIKAD SUPPLIES

13, Church Road, Edgbaston, Birmingham 15

W.S.18.
Complete Portable Tx-Rx, freq. range 6-Mcs. Stored soiled. Limited number £5 each, carriage paid.

TRANSMITTER RECEIVER TYPE 1134A
Complete valves, etc. Popular Tx-Rx (equiv. to SCR.522). In transit cases. Limited number. £10 each, carriage paid.

R.F. UNITS.
Type 25 and 27. These popular units need no further description. Limited quantity. 25/- each.

CARBON PILE VOLTAGE REGULATORS TYPE E.
Ref. 5C/1304. Complete with metal rectifier for 80 v. A.C. 27/6 each, carriage paid.

SERIES BOOSTER. Ref. U/2712. Input 12 v. output 24 v. 27/6 each, carriage paid.

EX-A.M. COMMUNICATION RECEIVER TYPE R.1155A.
Complete with 10 valves. New condition. Supplied in transit case at £9 15 0 each, carriage paid.

POWER UNITS TYPE 87.
In black metal case. Size 8½ x 4½ x 6¼in. 24 v. input, 6.5 v. at 2½ a. and 250 v. at 50 m/a. output. 15/- each, carriage paid.

TYPE 104.
As above but 12 v. input. 21/6 each, carriage paid.

GERMANIUM CRYSTAL DIODES.
Midget size with wire ends, 3/- each, post paid.

32 MFD ELECTROLYTIC CONDENSERS.
450 v D.C. 1/9 each, post paid.

OUTPUT TRANSFORMERS.
Type ZA.20497. Designed for p.p. output of 2 x E.L.35 and capable of handling 12-15 w. Limited quantity. 17/- each, carriage paid.

HEADPHONES.
Type DLR.1, 2 and 3 complete with lead and plug. 9/- each, post paid.

RECEIVER TYPE R.1355. New, in original transit case, complete with all valves, components etc., as specified for the "Inexpensive television receiver." 80/- each, carriage paid.

ELECTRIC MOTORS made by Crompton Parkinson. 1/6th h.p. Single phase. 220-250 volts A.C. Standard r.p.m. Resilient mounting. Fitted with Thermal overload switch. New in original crates. £3 each, carriage paid.

LOUDSPEAKERS.
6½in. in P.M. made by Plessey. Less output transformer. New stock, 11/6 each, carriage paid.

MAGNETIC RELAYS 24-VOLT.
Ref. SC.849. New, unused and individually boxed. Complete with outlet plug. 7/6 each. Carriage paid.

KEY AND PLUG ASSEMBLY No. 8.
ZA.4354. New condition, but not boxed. Complete plugs and straps. 7/6 each, carriage paid.

MAIL ORDER ONLY TERMS, CASH WITH ORDER OR C.O.D. EXTRA Satisfaction or money back guarantee

ALL ENQUIRIES S.A.E. PLEASE

Henry's

RADIO COMPONENTS
ELECTRONIC & TELEPHONE EQUIPMENT

5 Harrow Road, Paddington, W.2

PADdington 1008/9 and 0401

OSCILLOSCOPE TYPE 3BP1. We have pleasure in offering a 'scope designed primarily for simplicity and low cost at the same time giving reliable and consistent results. The Service engineer will find this an invaluable instrument due to its compactness, simplicity and speed of interpreting faults in radio receivers, checking transmitters, modulation, depth, etc.



SPECIFICATIONS :

Amplifier : Max. Gain, Peak to Peak — 3 volts per cm. Frequency response 10 c/s — 100 k/c. Flat — 100 c/s to 50 k/c. Time Base : frequency range 5 c/s — 30 k/c.

Dimensions : 8½ x 6½ x 11½. Weight 17½ lb. Black crackle finish

Price : Brand New, £14.14.-, carr. pd.

BOWTHORPE CONTINUITY METER Dual scale 0-500 ohms and 100-200,000 ohms moving coil operated from 4½-volt internal battery. Size 6in. x 3in. x 4in. Original price £8.19.-. Our price, brand new, £4.4.-.

CONDENSERS. .1 mfd. 2,500 vw., metal or bakelite, 2/6. Electrolytic 8 mfd. 450 vw., 2/6 ; 8 x 8 mfd., 4/- ; 16 mfd. 450 vw., 3/6 ; 16 x 16 mfd., 450 vw., 5/-. All midget tubular cans, cardboard sleeves, 60 mfd. x 40 mfd. 350 vw. size 4½in. x 1in., 7/6. Bias condensers 25 x 25 mfd., 50 x 12, 12 x 50, 1/6 ; 50 x 50, 3/-. All new stocks. NOT surplus.

TRANSFORMERS-FILAMENT. All inputs 200/250 v. A.C.

Output 6.3 v., 1.5 amps.	7 6
Output 6.3 v., 2.5 amps.	10 0
Output 6 and 12 v., 3 amps.	£1 0 0
Output 6.3 v., 12 amps.	£1 5 0

N.B.—Above voltages are when "on load."

MOVING COIL METERS (Brand New) :—

0-5 mA, square panel mounting, 2in. scale	7 6
0-50 mA, square panel mounting, 2in. scale	7 6
0-40 v. square panel mounting, 2in. scale	7 6
0-20 amps square panel mounting, 2in. scale	7 6
0-300 v. square panel mounting, 2in. scale	12 6
0-40/120 m.A double reading round scale...	12 6

2½in. round flush m/g., drilled flange :—

Range 0/750 v., 200 ohms per v. each	£1 2 6
Range 0/1500 v., 250 ohms per v. each	£1 2 6
Range 0/3000 v., 200 ohms per v. each	£1 5 0
0-1 M.A Desk Type 2½" scale	£1 12 6

L.T. RECTIFIERS

6 v. 1 amp, G.E.C.	6 0
12 v. 2½ amp Westinghouse	12 6
12 v. 4 amp S.T.C.	17 6
12 v. 8 amp S.T.C.	£1 12 6

S.T.C. RECTIFIERS E.H.T.

K3/25 650 v. 1 mA	4 7
K3/40 1,000 v. 1 mA	6 8
K3/100 8,500 v. 1 mA	14 8
K3/200 10,500 v. 1 mA	£1 6 0

H.T. RECTIFIERS

S.T.C. 125 v. 60 mA	4 6
S.T.C. 125 v. 100 mA	5 0
S.T.C. 125 v. 125 mA	6 0
S.T.C. 250 v. 250 mA	18 0
S.T.C. 300 v. 75 mA	6 0
WESTINGHOUSE 14D 972, 250 v. 25 mA	6 6
G.E.C. METER RECTIFIER, 1 mA	11 6

WEARITE

705 Coil Pack 3 wave band	£1 17 10
400B Min. I.F.T. 465 kc. pair	15 0
501 and 502, 465 kc. pair	14 0
800's pair	15 0

PYE 45 Mc/s STRIP. Special purchase of M.O.S. Type 3583 Units. Size 15in. x 8in. x 2in. Complete with 45 Mc/s Pye strip, 12 valves, 10 EF50, EB34 and EA50, volume controls and hosts of resistors and condensers. Sound vision can be incorporated on this chassis with minimum space. New condition. Modification data supplied. Price £3 carriage paid.

INDICATOR UNIT TYPE 182A. This unit contains VCR517 Cathode Ray 6in. tube, complete with Mu-metal screen, 3 EF50, 4 SP61 and 1 SU4G valves, 9 wire-wound volume controls and quantity of resistors and condensers. Suitable either for basis of television (full picture guaranteed) or Oscilloscope. "Scope constructional circuit included. Offered BRAND NEW (less relay) in original packing case at 79/6. Plus 7/6 carr.

STROBE UNITS. Brand new, in sealed cartons, these contain 6 EF50's, 5 EA50's, 1 SP61, a host of condensers, resistors, transformers, chokes, relays, switches, 7 pots and 5 smoothing condensers. Size 18in. x 8½in. x 7½in. Only 67/6, plus 5/- carriage.

RECEIVER R1355. As specified for "Inexpensive Television." Complete with 8 valves VR65 and 1 each SU4G, VU120, VR92. Only 55/-, carriage 7/6. Brand new in original packing case. Slightly soiled at 35/-.

RF24, 25/- ; RF25, 25/- ; RF26, 59/6 ; RF27, 59/6. Owing to limited quantities, these units supplied only with R1355's.

CATHODE RAY TUBES :

VCR97. Guaranteed full picture. 40/-, carr. 5/-.

VCR517. Guaranteed full picture. 40/-, carr. 5/-.

3BP1. Suitable for 'scopes. 25/-, carr. 3/-.

RECEIVER UNIT TYPE 159. Size 8in. x 6½in x 4½in., containing VR91, VR92, CV66, VR65 and 24 v. selector switch. New condition, 15/-.

WALKIE-TALKIE TYPE 46, complete with 6 valves. 2 VP23, HL23, DD/PP25, TP25 and ATP4, aerial rods, I.F. trans., 1/6 Mc/s mike trans. in new condition but less transmitting components and coils removed by M.O.S., 35/-, carr. paid (less valves 14/-).

No. 38 'WALKIE TALKIE" TRANS. RECEIVER, complete with throat mike, 'phones, Junction Box and aerial rods in canvas bag. Freq. range 7.4 to 9 Mc/s. All units are as new and tested before dispatch. As supplied to Overseas police forces. £4.19.6, carr. 2/6.

TUNING CONDENSERS

2 gang .0005 standard ¼" spindle, with trimmers	7 6
3 gang .0005 with ceramic insulation ¼" spindle	7 6
Midget two gang .000375, with trimmers. Size 2in. x 1½in. x 1¼in.	6 6
Midget .0005 mfd. 2 gang tuning condenser. Size only 2¼in. x 1¾in. x 1¼in.	6 6
Or with built-in trimmers	7 6
Two-gang Midget, .0005 with 4-way push-button assembly. Suitable for car radio, etc.	8 6

A COMBINED SIGNAL TRACER AND AUDIO OSCILLATOR. An easy-to-build unit that can be used for I.F. and Audio Signal Tracing, without any switching or tuning, including variable output oscillator for amplifier checking. Highly sensitive, responds to signals picked up from an ordinary receiving aerial.

The circuit is that of a high-gain 2-stage, resistance-coupled audio frequency amplifier, employing 3 miniature 1.4 valves, with a 3-in. speaker in the Output of the Power Amplifier stage. An added advantage being that as this unit is "All-Dry" it can be used with safety on A.C. or A.C./D.C. mains and battery sets. The complete kit with portable cabinet (size 6in. x 7in. x 6in.) and battery weighs only 4lb.

We shall be pleased to supply a complete kit for the construction of the above, right down to the last nut and bolt, including 2 1T4 and 1 1S4 valves, 3in. speaker and portable case and all-dry battery for £4/19/6. Concise instructions and circuits supplied. If preferred, circuit and instructions only can be supplied for 1/6. If required this unit will be assembled and tested for extra charge of 15/-. This is a highly efficient instrument, and a MUST for every radio man.

9in. ESCUTCHEON. Brown bakelite. Suitable plate glass and mask for 9in. tube. Price 7/6 each.

E.H.T. TRANSFORMER for VCR97 Input 230 v., output 2,500 v. 4 v. 2-0-2. 45/-.

E.H.T. TRANSFORMER for 5CP1. Input, 230 v., output 3,250 v. at 0.6 a.m., 2-0-2 v. 48/-.

MAINS TRANSFORMERS. 250-0-250, 90 mA, 6.3 v. 3 amp, 5 v. 2 amp. Input 110 v., 250 v. £1, post 9d.

EX-MANUFACTURERS. 350-0-350, 100 mA, 6.3 v. 4 amp, 5 v. 2 amp Input 200/250. 25/-.

REPLACEMENT TYPE. 350-0-350, 90 mA, 4 v. 6 amps, 4 v. 3 amps, input 200/250. 18/6.

DUAL PURPOSE TYPE. 350-0-350, 80 mA, 6.3 v. tapped 4 v. at 3 amps, 5 v. tapped at 2 amps, 4 v. 29/-, post 9d.

VR91 (EF50). Red Sylvanian. Brand new original boxes U.S.A., 10/- ; Silver, brand new original boxes, British, 8/6 ; red or silver ex-units guaranteed, 6/- ; 6A7, 12/6 ; 43, 12/6 ; VU111, VU120, VU120A, at 5/- ; 154, at 9/-. Over 10,000 B.V.A. valves in stock. Send in your enquiries.

Send stamped addressed envelope for 28-page Comprehensive Catalogue price 3d.

OPEN MONDAY TO SATURDAY 9-5.30 p.m. (THURSDAY 1 p.m.)

VALVES!! TUBES!!

RECEIVING. TRANSMITTING. MAGNETRONS. KLYSTRONS.

CATHODE-RAY TUBES. PHOTOCELLS. ETC.

First Grade Quality - British and American Make - No Dollar Expenditure Involved

LARGE QUANTITIES & GREAT VARIETIES
IMMEDIATE DELIVERIES FROM STOCK

S. Szymanski

(pronounced SHE-MAN-SKEE)

ELECTRONIC ENGINEER & STOCKIST

Office and Stores:

12a, LEIGHTON GROVE, LONDON, N.W.5

Telephones: { *GULliver 1399* / *HENdon 1617* — *Telegrams:* { *Overseas: "Shemanskee" London* / *Inland: "Shemanskee" Norwest London*

PROBABLY THE LARGEST ACTUAL STOCKIST IN ENGLAND

WHOLESALE & EXPORT ONLY

OUTSTANDING OFFERS FOR EXPORT ONLY

U.S.A. Radio & Radar Equipment
RCA TRANSMITTERS, Type ET-4336-B, H, K, L.
Westinghouse AIRCRAFT TRANSMITTERS, Model GO-9.
TRANSMITTERS RECEIVERS SCR-536.
RADIO SETS SCR-695. RECEIVERS AR-77.
TEST EQUIPMENT IE-46 (Signal Generators 1-196-B, Frequency Meters BC-906-D, Radio Receivers BC-1066-B).
Model ASE-1 RADAR AIRCRAFT EQUIPMENT (200 Units).
AN/APS-3 Coastal Defence RADAR.
Hallicrafters SCR-299, 399 and 499 (BC-610).
Western Electric SCR-517-B.
RADAR Mk. 26 (Models 3 & 4).
INTERROGATORS-RESPONSORS BM-1 (and BN-1).
REPEATER-INDICATORS AN/APA-1.
RADAR INDICATING EQUIPMENT, Model VF.
AIRCRAFT RADAR (complete units), **APS-6**.
AN/APN RADIO ALTIMETER EQUIPMENT.

Spares (Radio and Radar—U.S.A.)
Full range of spares for most U.S.A. Aircraft, Naval and Ground Radio and Radar Units (SCR-187, 188, 193-269, 274-N, 287, 508-10, 17, 536, 566, 593, 608-10 (very large quantities), 694, 695, MRN-3, TRA-1, —ABK, BM, BN, SM, SO, SQ, SK, APS-2, 3, 4, 6, 15).

British T.R. (X 42, W.S No. 11, W.S No. 17, W.S No. 18 Mk. III, W.S No. 38, W.S No. 58, W.S No. 68-T).

Power Units, Wavemeters, Motor Generators, Dynamotors and large quantities of various components.

Aircraft Instruments and Accessories
Large selection of Bendix Instruments.
Aircraft Generators and Motor Assemblies. Oxygen installations.
Individual Test Certificates and A.I.D. Certificates can be supplied upon request.

Enquiries to

BRITISH SAROZAL LTD.

(Export Branch)

1 BRISTOL HOUSE, SOUTHAMPTON ROW, LONDON, W.C.1

Telephone: HOLborn 6763-4-5 *Cables: Sarozal, London*

OVERSEAS BUYERS ARE CORDIALLY INVITED TO VISIT OUR WAREHOUSES, SHOWROOMS AND LABORATORY

ENGLISH ELECTRIC COMPANY LIMITED

GUIDED MISSILES RESEARCH AND DEVELOPMENT

English Electric, Luton, have vacancies on their guided missile project for both Senior and Junior Engineers on exceptionally interesting work both in research into new techniques and development of existing ones. Good prospects and permanent posts for able men of the following categories :—

1. **ELECTRONICS, RADAR OR TELEVISION ENGINEERS** with H.N.C. or Degree in Electrical Engineering either with or without Industrial or Research experience.

2. **ELECTRICAL ENGINEERS** with H.N.C. or Degree interested in Servo-mechanisms, Computing devices or instrumentation. Previous experience desirable but not essential.

3. **PHYSICISTS** interested in Electronics, Radar, Television, Computing devices or Optics either with or without Industrial experience.

Please write quoting reference S.A.23A with appropriate number, and giving full details to

Central Personnel Services
English Electric Co. Ltd.
24-30 Gillingham St., London, S.W.1

Wireless World Classified Advertisements

Rate 7/- for 2 lines or less and 3/6 for every additional line or part thereof, average lines 6 words. Box Numbers 2 words plus 1/-. Address replies: Box 0000 c/o "Wireless World" Dorset House, Stamford St., London, S.E.1. Trade discount details available on application. Press Day: November 1952 issue, Thursday October 2nd. No responsibility accepted for errors.

WARNING

Readers are warned that Government surplus components which may be offered for sale through our columns carry no manufacturers' guarantee. Many of these components will have been designed for special purposes making them unsuitable for civilian use, or may have deteriorated as a result of the conditions under which they have been stored. We cannot undertake to deal with any complaints regarding any such components purchased.

NEW RECEIVERS AND AMPLIFIERS

UNIVERSAL ELECTRONIC PRODUCTS, 56, Marylebone High St., London, W.1. Welbeck 4055.

SPECIALISTS in the design and manufacture of high fidelity reproducing equipment from 5-100 watts for domestic or industrial purposes. Our new twin channel amplifier (type U.E.571) with independent bass and treble outputs, provides the most satisfying standard of reproduction we have yet experienced. It is now being demonstrated in our rooms daily (we close Thursday 1 p.m., Saturday 4.30 p.m.) and we invite those who seek perfection from recorded music to hear this superb instrument. We also offer tuning units or complete chassis designed and constructed to individual requirements.

AMPLIFIERS for disc and tape recording built to order; send requirements to:—BERNARD J. BROWN, 33, Goldhawk Rd., Shepherds Bush, London, W.12. [0218

HIGH-GRADE 25-watt P.A. amplifiers, microphone and pick-up inputs, AC 200/250 volts, £24/15.—Delta Electronics, 42, Southwick St., W.2. [8957

12-watt high quality amplifiers, bass and treble boost; £12/15, lists.—Broadcast & Acoustic Equipment Co., Ltd., Tomsgaard, Norwich. [0065

OUR direct sales policy enables us to offer the Triumph 10-watt push-pull power amplifier with remote tone control unit for as little as £16/10 complete; built to standards of performance and workmanship normally found in higher priced productions; other amplifiers from £11/15; radio units from £8/7/6 and the Amos TRP from £7/13/6.—Full details from Triumph Amplifiers, Lightwick, Hants. [7046

OUR model E554 R/G chassis now available; this 5-valve all-wave superhet is fully aligned and aerial tested complete with valves; easy installation, handsome grille cloth, 4 watts output, variable N.F.B., also available our model RF35 feeder unit, tested and complete with 3 valves; 2d stamp for literature; trade enquiries invited.—Bayly Bros., 46, Pavillon Drive, Leigh-on-Sea, Essex. [8590

RECEIVERS, AMPLIFIERS SURPLUS AND SECONDHAND

PHILCO 12v car radio; offers over £8.—Box 2261. [9022

R.C.A.-AR77 receiver, perfect; £25.—Vinces Cottage, Churt, Surrey. [9033

VIEWMASTER time base chassis, comp. valves, 12in C.R.T.; £30; details.—Box 2501.

LEAK amplifier, 15 watt B. & T. controls, offers.—Main, The Cottage, Dulverton, Som. [9049

PANORAMIC adaptor BC-1032-B, perfect, offers.—21, Orleans St., Buttershaw, Bradford, Yks. [7079

£11.—New R.1155 receivers, in cases.—E.W.S. Co., 69, Church Rd., Moseley, Birmingham. [7081

FOR sale.—R.C.A. radio, large number spare valves, fitted with S type meter; £40.—Apply Box 2477. [7084

CONSOLE 9in TV receiver, cost new 1946 £91, requires servicing; bargain for TV constructor; £30, o.n.o.—Ring Arn. 5807. [9067

SELL post-war used radios, various makers, fine appearance; enquiries invited.—49, Haywood St., Lambhill, Glasgow, N.W. [9043

HRO Rx and coils in stock, also ARoc, BC348R, CR100, etc.—Requirements please to R.T. & I. Service, 254, Grove Green Rd., London E.11. Ley 4986. [9055

HIGH-quality radiogram, push-pull output, beautiful modern oak cabinet specially built, E.M.I. pick-up, everything of the best, built-in compartment for records; £45.

LANE tape deck, unused, chassis for amplifier, large mains transformer, switches, etc.; £10.

LARGE Philips push-pull radio chassis, with partly built console cabinet; £10.—Mr. ALDERTON, 7, Westfield Avenue, Harpenden, Herts. Tel 284. [7076

SX28 communications receiver perfect, £80 (or offer); also 2-1155 receivers, both perfect, £7 each.—Radiovision Service, 87, High St., Hoddesdon, Herts (Tel. Hoddesdon 3102). [8972

HAMMERLAND 11-valve communications receiver, type H.Q.-129-X, R.F. 31 Mc/s, 6 V 6 output, 9.7 to 555 metres in six bands, complete with 10in Jensen matching speaking in crackle cabinet and instruction manual, as new; £68 or near offer.—Box 2296. [9029

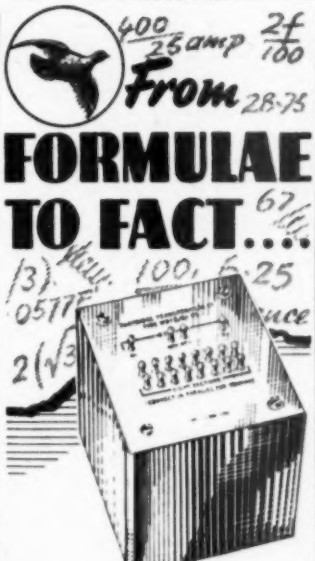

The Partridge—

WILLIAMSON

OUTPUT TRANSFORMER

To convert formulæ to actual performance implies the use of the very highest standards in the materials and workmanship employed. Since the inception, in 1947, of the now world famous Williamson Amplifier, Partridge "to-specification" components have been the insistent choice of the experts. This transformer is available in a varied range of impedances. Secondary windings are brought out to eight separate sections of equal impedance. Stock types comprise 0.95 ohm, 1.7 ohm, 3.6 ohm and 7.5 ohm sections.

Potted type (as illustrated) £7 5 0

De Luxe type £6 16 6

Full technical data on request.

PARTRIDGE

TRANSFORMERS LTD

BOREHAM ROAD · WILMSLOW BY-PASS · TOLWORTH · SURREY

ARMSTRONG RF105/1 10-valve 10 watt all-wave chassis; £12, o.n.o.—Box 2502. [7008

LOUDSPEAKERS SURPLUS AND SECONDHAND

HARTLEY-TURNER 215, as new; £7/10.—Box 1663. [8986

HT 215 15in in box baffle; £9; condition as new.—Box 2499. [7089

BARKER 148, £9, o.n.o.—Evans, 20, Victoria Rd., Upper Edmonton, N.18. [9063

BAKER 14in triple cone 15 ohms, as new; £6.—Woollen, 9, Buxton Ave., Crewe. [7087

RECEIVER type R1155E converted to wireless; £10.—Graves, 72, Bovill Rd., S.E.23. [8995

HARTLEY Turner 215 speaker; £7.—H. Corderoy, 21, St. David's Drive, Broxbourne, Herts. [7078

GOODMAN'S Axiom 12, perfect, £5; 10in Qual Marconiphone speaker, in perf. cabinet, £3 or offer.—Box 2260. [9019

RADIO UNLIMITED, Elm Rd., London, E.17 (Key 4815).—Special this month only, leading makes 5in P.M. 250 ohms loudspeakers, 10/9 each, four for £2/-. [0065

BARKER 148 in professional corner cabinet to Barker design, £12/10 (cost £36); S.S., Phase Inverter, complete, £5/10, both as new, burgundy finish.—Box 2454. [9066

WHARFEDALE design sand-filled corner reflex cabinet, 5ft×3ft 6in, with 12in Rola speaker, £6/10; mains energised 6in speaker in cabinet, 16in×16in×10in, 15/-; M.M.V. portable gramophone, 55/-; Garrard gram. turntable 110v A.C. with pick-up, £1; Philips radiogram cabinet, walnut, 31in×16in×34in, with twin cone 10in speaker and radio dial, £8/10.—Bockner & Co., Dukes Lane, London, W.8. [7075

NEW DYNAMOS, MOTORS, ETC.

BATTERY chargers, 4 models, 2-6-12v, 1-2-4 amp D.C.; any mains voltage; also larger types special transformers, chokes, test gear, interior car heaters, etc.—The Banner Electric Co., Ltd., Hoddesdon, Herts. [0122

ALL types of rotating electrical machinery up to 20kva available, including rotary converters, rotary transformers, motors, petrol and diesel-engined generating plants, alternators and d.c. generators. We are also in a position to quote for power transformers, as actual manufacturers we will be glad to quote for any quantity for home or export.

DIESEL Electric generating plants, 3kva, 230v with push-button remote control, starting equipment, ready for use; £265.

ROTARY transformers, input 20v d.c., outputs 6.5v d.c. and 500v d.c., permanent magnet field, 20/-; ditto, input 28v d.c. and 1,200v 70ma d.c. output; energised field, 55/-; ditto, input 12v d.c., output 500v 30ma d.c. energised fields 85/-; reasonable delivery.

CHAS. F. WARD, Lordscroft Works, Haverhill, Suffolk. Tel. 253. [0038

THE Pearce new model diesel alternator plant, on welded steel frame, 230/1/50 3kva plus 52v 15a d.c. Petters latest AVAI, air-cooled diesel engine, belt-driven alternator, self-energised, automatic voltage control by winding on stator, at govern, speed 1,500 rpm, d.c. output trickle charges or charges lighting and starter battery up to 15amps. 24v lighting is used when plant is not in use, start and stop by remote control push-button, complete with main switch and fuses, battery cables, 24v 72 amp/hr batt, instruction book, spares, engine covered by Petters' inspection service £275, free delivery, where remote start and stop not required, but only push start on plant, reduction of £6/10, a few from stock, others quick delivery, if you collect, or we deliver, battery is charged and a 10 cu ft concrete bed given free. SEND p.c. for full description and photographs. ALSO "AUTOMATIC" start & stop plants. Water-cooled "Petters" engine.

ALTERNATORS four pole, 1,500 rpm, "press-button start," automatic voltage control without external equipment, type as fitted in above plant, 110/1/60 or 250/1/50, 3kva, wt 240lb, £72 del.; also 110/1/60 or 250/1/50 6kva wt. 400lb £95 del. 5kva, £77. 6kva, £102; f.o.b. Liverpool or London docks; please state direction of rotation at pulley end.

ALTERNATORS 250/1/50, 400VA, self energised, 3,000 rpm, ball bearing, £22/10 del.; also special television model, same price; voltage regulator 30/- extra.

TELEVISION, guaranteed interference free, special rotary converters, fitted radio and television filters, wt. 60lb d.c. input, 12v 200va out, 24v, 50v, 110v d.c. to 280v out, 250va, £25/10, del., with resistance converters run direct from lighting plant, also converters for radiogram and general use, inputs, outputs and prices as above; the above also supplied without smoothing.

THE above are the latest products of British manufacture, and are guaranteed for one year, fullest details of plant alternators or 400VA alt. or rotary converters by return post, state which required; terms c.w.o., pro forma invoice c.o.d. (post goods only).

T. W. PEARCE 66, Great Percy St. W.C.1 (near Angel). [0014

DYNAMOS, MOTORS, ETC.—SURPLUS AND SECONDHAND

VALRADIO converter little used, 250v D.C. input, 240v 200 watt A.C. output, cost £17/12, accept £12/10 o.n.o.—Gore, 155, Wellington St., Gravesend. [7072

ELECTRIC motors, 250/250v, 2,000 rpm, h.p. 1/150th £4/10; 1/50th £6/6; 1/16th £9/4; 130th, 5,000 rpm £5/15; Morse practice units, £1/16/6; c.w.o.—124, Oatlands Drive, Slough.

*** MANUFACTURERS**
*** RESEARCH ENGINEERS**
*** UNIVERSITIES**
*** AMATEURS, Etc.**

We hold the largest stock on the South Coast of **Ex-Government surplus electrical, radio and aircraft equipment.** Send for our new list No. 9, price 6d., which contains over 300 items of **Government surplus equipment** of interest to all mechanical and electrical engineers—the following are a few items taken from the list.

Motor Flash Unit. Contains small 24 v. motor coupled to a worm reduction gear running at about 60 r.p.m. and fitted with four sets of make and break contacts, connected to six coaxial sockets. This unit is ideal for flashing signs, etc. **12/6.** Post 1/6.

Cathode Ray Tubes. Type 13B 5in. complete with screen, **25/-.** Post 3/6. Special offer, type 9P, brand new in case, **22/6.** Post 2/6.

Morse Code Tape Recorders. Ex-G.P.O. Complete with clockwork motor, brand new in addition, **50/-.** Carriage 7/6.

5in. Reels of 1in. Paper Tape, suitable for above. **2/6.** Post 6d.

Uniselectors. P.O. type. 6 banks of 25 contacts with half wipers twice. Can be used as a 50 point 3 bank switch. Used but in new condition. **21/6.** Post 1/6.

Uniselectors. 8 bank units in new, full set of wipers, brand new in maker's carton. **57/6.** Postage 3/-.

Uniselectors. Small. Ex-Government Morse switch, 3 banks of 10 contacts, ideal for radio control, etc. New and boxed, **25/-.** Post 1/6.

American Dynamotors by Bendix, type PU43A 24V-28V, 0.9 amps. output 115 v. 7 amps. 800 cycles. In new condition. **£3 10/-.** Carriage 5/-.

Relays. G.P.O. 11 a. 2,000 ohm coil except contact change over 10/6.

2000 type 400 to 100 ohm coil 2 sets of make contacts 1 light, 1 heavy. **7/6.** 3000 ohm 1 set of break and 1 set of make contacts **8/6.** 400 ohm 4 sets of make and 2 sets of break, **7/6.** 4 watt 200 ohm coil 2 sets of make 1 set of break, **7/6.** Miniature Ameflex relays 750 ohm 1 set of change over 3/-, 500 ohm 2 sets of change over, 4/-, 1000 ohm single pole change over with adjustable tension Type 8,810, **8/6.** 150 ohm double pole change over Type 4 RC/91 by GC **8/6.** 500 ohm double pole change over, **3/6.** 6-12v. 50 ohm 2 sets of break heavy duty with 1 ohm resistor and 4-way Jones socket **2/6.**

600 Type. 150 ohm coil with 2 sets of make and 1 set of break. **4/6.** 150 ohm coil 1 set of change over and 1 set of change over make before break, **7/6.** Post each relay 6d.

These are a few of the relays we stock. We can supply most types of coil and contacts to order. We welcome your enquiries.

Remote Contactors. 11 v. stepping mechanism, 120 impulses for 1 rev. of pointer, glass front, resetting control, on off switch, 6oz. etc. Will make an ideal 120 magnetic counter for coil winding, etc. Brand new, **7/6.** Postage 1/3. Hasnamol possibilities as electric pendulum clock.

Master Contactors. 10-hour clockwork movement with contacts that make and break every half second, also fitted with thermal switch and suppressor gear all contained in neat metal container. Forms basis for making time switch, etc. **12/-.** Post 1/9.

Heavy Duty L.T. Chokes suitable for low voltage D.C. supplies. 2 amps. **9/6.**

Wavemeters. Type W1191 Range 100 Kc/s to 70 Mc/s, contained in metal carrying case approx. 12in. cube less valves and crystal. **25/-.** Carriage 7/6.

Voltage Control Regulators. Type 10/2549 containing magnetic relay voltage regulator 10 and 4 MF condenser fuse box on and off switch contained in metal case approx. 10 × 8 × 8in. Brand new in maker's carton, **25/-.** Post 4/6.

Voltage Control Regulator. Type 5UC13/4. Containing condenser 3 and 8 MF switch, indicator lamp, fuse box, suppressor, etc. Contained in box approx. 10 × 8 × 8in. Brand new in maker's carton, **20/-.** Post 4/6.

Pumps. Submersible type. 24 v. 120 g.p.h. 30ft. lift, **50/-.** Postage 2/6. Ideal for wells, boats, garden fountains, etc.

Indicator Unit Boxes. Complete with chassis, these have been stripped of components but are ideal for oscillopes, etc. Chassis 11 × 6 × 6in. Cover 11 × 6 × 6in., which also contains a glass panel in front 3in. square. Price **3/6.** Postage 2/-.

Flexible Shafts. Approximately six feet long, suitable for light grinders, etc. Price **5/6.** Postage 1/6.

Crystal Monitors. Type No. 3, complete in brand new condition, less valves (3-VT50's) and crystal. Containing two transformers, crystal selector switch, on/off switch, indicator light, iron cored chokes, resistances and condensers, etc. Contained in teak box, 24in. × 24in. × 8in. **10/6.** Postage 2/-.

HF60. Complete with three valves 6P61's. **18/6.** Postage 2/-.

Large Slider Resistances. 5 ohms at 20 amps. **25/-** each. Postage 2/6.

Wire Wound Resistances. 1 meg. 1%. **1/6.** Postage 6d.

A. T. SALLIS
93 NORTH ROAD, BRIGHTON, SUSSEX
Telephone: Brighton 25836

TRANSMITTING EQUIPMENT

TR1143A, TR1155H, T1151, T1090, T1403B offered.—E.W.S. Co., 69, Church Rd., Mosley, Birmingham. [7063

FOR sale, Pye fixed station radio telephone RX.TX. with 2 mobile installations, unused, cost £450.—Details from Taylors (Garage), Ltd., Green Market, Penzance. [6984

NEW TEST EQUIPMENT

BC.221 Ktal controlled, modulated frequency meter, range 125 Kc/s to 20 Mc/s, complete with calibration book, service manual and spare valves, appears to be unused; mains power pack fitted, £35; heavy duty output transformers, weight 5½lb, multi tapped, 4/9, post 1/2.—Hayneson, 14, St. Mary's, Bedford.

TEST EQUIPMENT—SURPLUS AND SECONDHAND

COSSOR 339A D/B oscillograph and 343 oscillator; £45, working order.—Box 2476.

COSSOR 339A oscilloscope, as new; £50.—Hunter, 205, Cavendish Rd., Bispham, Blackpool. [9099

BC221 frequency meter, 125 kc/s to 20 mc/s, good condition, spare valves; £50.—Box 2465. [7073

VARIACS (100L), 250v/0/250v, 8 amps, brand new cond., £16.10 ea., carr. paid.—P. B. Crawshay, 166, Pixmore Way, Letchworth, Herts.

AVO Electronic Testmeter, as new; £29; AVO valve tester with separate rotary switch panel modified for TV types, etc., £12; Windsor 90A CR oscilloscope, £20; Wanted, AVO model 40.—COSMIC RADIO, Ltd., 129, Oxton Rd., Birkenhead. [9052

BRIDGE-MEGGERS by E. & V., Ltd., 0·1ohm to 50 megohms, self-contained, 250v, accuracy tested, each, in leather case, £21.—P. B. Crawshay, 166, Pixmore Way, Letchworth, Herts. [0259

SIGNAL generators, oscilloscopes, output meters, valve voltmeters, frequency meters, multi-range meters in stock; your enquiries are invited.—Requirements to R.T. & I. Service, 254, Grove Green Rd., London, E.11. Ley. 4986.

NEW GRAMOPHONE AND SOUND EQUIPMENT

TAPE recorder motors, 230v a.c., powerful, quiet, brand new, 15/11, post, etc., 1/1.—K. W. Logan, Wentalet, Hitchin, Herts. [0232

MAGNETIC tape, Emitape H.60 55/-, G.E.C. A 50/- 1,200ft. Wearite tape decks, blank recording discs, all from stock, trade only.—SOUND DISCS (SUPPLIES), Ltd., 178, Brighton Rd., Southport, Lancs. Tel. 58155. [7765

TAPE record-playback amplifiers, high fidelity 12 watts P. pull output, 17gns; kits assembled and wired expertly from 50/-; desks, tape, mikes in stock, prompt delivery.—HARDING ELECTRONICS, 120a, Mora Rd., London, N.W.2. [9034

9Kcs whistle can be attenuated with a high Q toroidal coil fitted as series or parallel resonant cct. easily adjusted aurally, coil only, 35/-, can be used also as inductance standard, accuracy 2%.—BEL SOUND PRODUCTS Co., Marlborough Yard, London, Archway, N.19. [0187

4 only, Wearite tape decks, £35 each; Goodmans 12in Audiom 60, £8/12/6 (no P/Tax); complete record/Wearite Ferrograph circuit in rexine case, £75; tape:—Wearite 45/-, E.M.I. 35/-, Scotch Boy 55/-, Soundmirror 25/-; one only, complete Soundmirror recorder, £40 (as new).—Austen, 28, Valebridge Rd., Burgess Hill.

CINE VOX disc recording equipments type C70 for high quality recordings from existing microphone equipment, price from 28gns, also available as a complete channel inclusive of mic., amplifier and playback equipment, at 70gns; type C7 for best quality professional requirements—recorder mechanism at 48gns, or complete channel at 110gns; demonstrations arranged in London.—CINE VOX, 357, Fulham Rd., London, S.W.10. [0209

PLEASE write for details to K.T.S. Ltd., 60, Aylward Rd., London, S.W.20. (Liberty 2426.) Callers by appointment only. [0299

TAPE recorder (Unithilt), parts: power-drive unit H.D. fan-cooled motor, heavy balanced flywheel, in special bearings mounted in cast alloy frames, 5-hole fixing to panel front speed change 2¾–7½ips sec. £6 delivered, plus £1 deposit on packing; control head unit 1-hole fixing, cam unit interlocked for motor, stop, rewind, etc., 55/-; pot core oscillator coil, with tags, 10/-.

ALSO equaliser pre-amps with EF40, amplifier parts, complete amps; s.a.e. for leaflets.—MIDLAND Radio Coil Products, 28, Winstanley Rd., Wellingborough. [0223

GRAMOPHONE AND SOUND EQUIPMENT —SURPLUS AND SECONDHAND

WEARITE high quality tape deck, unused, perfect; £52.—Box 2500. [7090

FOR sale Scophony-Baird tape recorder, as new, complete with spare reels of tape.—DAVID PIKE & Co., Ltd., Ebor Mills, Bingley, Yorks. [0059

FOR sale, Plessey 3-speed autochange, £14; demonstration London area.—Box 2091.

COLLARO A.C. changer, 78 rpm, 9 10 and 12in mixed, crystal P.U., £10 or offer.—Brixton 3614. [8970

WIREK tape and wire recorders, records and playback immediately, radio shows, business conversations, overseas chats, etc.; brochures on many models, 3d.—Diamond Films, 124, Outlands Drive, Slough. Tel. 25211. [8980

EMV portable disc recorder and powerful public address unit, model H2500, unused, cost £240; must sell, £120 or offer.—Tel. Derwent 8597. [9017

MSS L.E.D. recording machine, Goodsell "Williamson" amplifier and pre-stage, guaranteed unused, £79.10, or separate. Wearite tape deck 4 spools tape, £35.—Box 1633. [8665

M. & J. PEARSON

OFFER

THE FOLLOWING CLEARANCE LINES

RECEIVERS TYPE R.1155 in perfect condition complete with 10 valves and packed in original Transit Case. **£9 15 0**

RECEIVER TYPE 1355 in perfect condition as specified for "Inexpensive Television." Complete with 10 valves and Transit Case **£2 0 0**

R.1155 3 GANG CONDENSERS. New ..... Each **7 6**

R.1155 KNOBS. Finger Control. N. Model ..... Each **6 0**

R.1155 KNOBS Standard A Type. Each **4 0**

EF50 VALVES. "Sylvania" Removed from brand new equipment. Price 3 for **10 0**

ADMIRALTY PATTERN SLOW MOTION DIALS. 4in. dia. with fine reading indicator **4 0**

CONDENSERS. 6 mfd. 1000 volt. 2000 Test. Size 4¾in. x 4in. x 1¾in. **3 6**

4 mfd. 1,000 v. 2,000 T. 4¾in. x 4in. x 1¼in. **2 6**

1 mfd. 3,000 volt working, 3¼in. x 3in. x 2¼in **3 6**

ALL PRICES INCLUDE POST AND CARRIAGE, SCOTLAND & ENGLAND

M. & J. PEARSON
263 GALLOWGATE
GLASGOW, C.4

THE MODERN BOOK CO.

Electronics for Communication Engineers. By J. Markus and V. Zeluff. **85s.** Postage 1s.

Television Receiving Equipment. By W. T. Cocking. **18s.** Postage 9d.

Feedback. By N. H. Crowhurst. **3s. 6d.** Postage 3d.

Time Bases. By O. S. Puckle. **32s.** Postage 9d.

Magnetic Recording. By M. L. Quartermaine. **4s. 6d.** Postage 3d.

Wireless Servicing Manual. By W. T. Cocking. **12s. 6d.** Postage 6d.

Foundations of Wireless. By M. G. Scroggie **12s. 6d.** Postage 9d.

TV Fault Finding. By "Radio Constructor." **5s.** Postage 3d.

Radio Engineers' Handbook. By F. E. Terman. **50s.** Postage 1s.

Principles and Practice of Radar. By H. E. Penrose and R. S. Boulding. **42s.** Postage 9d.

Handbook of Industrial Electronics Circuits. By J. Markus and V. Zeluff. **46s. 6d.** Postage 1s.

Television Servicing. By S. Holler and I. Shulman. **53s. 6d.** Postage 1s.

The Radio Amateur's Handbook 1952. By the A.R.R.L. **30s.** Postage 1s.

Radio Valve Data. Compiled by "Wireless World." **3s. 6d.** Postage 3d.

We have the finest selection of British and American radio publications in the country. Complete list on application.

19-23 PRAED STREET
(Dept. W.10)
LONDON, W.2
PADdington 4185

See and hear it first at HOLLEY'S

Now in stock:—

SOUND SALES Projection Television	£145	0	0
LEAK TI2 Amplifier	£28	7	0
LEAK Vari-Slope Pre-amp.	£12	12	0
LEAK Radio Tuner	£37	16	0
ROGERS Baby Amplifier with T.C. Unit	£18	0	0
SOUND SALES Tonemaster Amplifier with T.C. Unit	£25	0	0
WILLIAMSON Amplifiers by Rogers & Goodsell from	£29	0	0
SOUND SALES A-Z Amplifier with Tone Colour Unit	£32	10	0
QUAD Amplifier with T.C.	£25	0	0
QUAD Radio Feeder	£26	0	0
VOIGT Domestic Corner Horn	£47	0	0
VOIGT P.M. Speaker Unit	£40	0	0
TANNOY Duo-Concentric	£27	10	0
BARKER 150 Speaker Unit	£18	18	0
WHARFEDALE W12 C.S. Unit	£9	15	0
WHARFEDALE G/CSB Corner Panel Speaker	£18	10	0
WHARFEDALE W10 CSB Units	£9	5	0
WHARFEDALE Super 5 C S AL Unit	£5	0	0
GOODMANS Axiom 150 Mk. I	£10	5	6
GOODMANS Audiom 60 Speaker Unit	£8	5	0
DECCA Corner Speaker	£21	10	0
SOUND SALES DXI Radio Tuner	£22	14	7
GOODSELL Radio Feeders from	£15	15	0
DECCA GU4A Transcription type player units	£13	18	6
CONNOISSEUR 2-speed Motors	£22	18	0
DECCA XMS Pick-ups with heads	£7	0	0
CONNOISSEUR Pick-ups	£7	9	0
ARMSTRONG Chassis from	£25	12	4
CONCRETE Corner Panels	£3	15	0
RADIOGRAM Cabinets from	£12	12	0
CORNER SPEAKER CABINETS from	£7	10	0
WEARITE Tape Decks	£35	0	0
REFLECTOGRAPH Tape Decks with Amplifier.			

Demonstrations from 9.30 a.m.-1 p.m., 2-6 p.m., 1 p.m. Thursday.

HOLLEY'S RADIO STORES

285, CAMBERWELL ROAD, LONDON, S.E.5

Telephone : RODney 4988

SIMPHONIC tape recorder; £45; good condition.—Long, 33, Oakington Manor Drive, Wembley. [7074

MAGNETIC recorders; all types of magnetic recorders bought, sold, hired and exchanged, comprehensive repair service; mechanical and electronic repairs carried out by specialists, Magnegraph Limpet telephone pick-ups, 25/-.—THE MAGNEGRAPH RENTALS Co., 1, Hanway Place, Oxford St., W.1. [0236

B.S.R. disc recording equipment complete with all accessories, in perfect condition, comprises recording deck, amplifier, microphone and all leads, £120; also Lowther P.M.2 unit, as new, £28/10.—Please write The Elms, Warham Rd., South Croydon. [8044

POLLOCK lightweight M/C pickup, response 40 c.s. to 20 Kc/s H.F. resonance 25 Kc/s approx., complete set of parts for constructing head 25/-, plus 1/- post and packing; building instructions 5/-; sapphire stylus .001in. or .0025in. 7/6; model also for Thorns, 100/1 input transformer, steel case, 20/- plus 1/- post, etc.; s.a.e. for details to—A. M. Pollock, 51, Brooklawn Drive, Manchester, 20. [9055

NEW COMPONENTS

RADIO or television components; service aids, kits, speakers, accessories, etc.; send for free list.—RADIO EQUIPMENT COMPANY (Dept. W.W.), Castor Rd., Brixham, Devon. [8665

TELEVISION.—All cut-sets for home-built TV, latest 9in cathode ray tubes, 2/3, trade supplied.—BELL, Mail Order Dept., Hayford, N.19. [0135

1/- only for full constructional details for building our 7-started economy superhet, or given free with our latest constructor's handbook, price 2/6 only (see also our display advert.).—SUPACOILS Mail Order Office, 96, Greenway Avenue, London, E.17. [0133

COILS.—Potted coils, which gain, m/wave, 1/6/6; potted kit for IFTs, with instructions, 9/-; tuner coils, lowest loss pair, m/wave or lw, 5/6.—BEL, Marlborough Yard, N.19. Ars. 5078. [0184

EVERYTHING for home constructor, chassis, condensers, coils, valves, resistors, gram units, speakers, test gear, Viewmaster kits, etc., cash or H.P.; stamp for lists; quick service, no Govt. surplus offered.—James H. Martin & Co., BCM/EDHWA, London, W.C.1. [7694

CRYSTAL microphone inserts (Osmocord (Mic-6), guaranteed brand new; 15/6 post free; (Osmocord (Mic-50) hand stand microphones, black or white, £4/4 each, post free.—Radio-Aid, Ltd. (Retail Dept.), 29, Market St., Watford. [9056

FOR really good results you can do no better than use Osmor coils and coilpacks, ask anyone of experience! Send 5d (stamps) today for beautifully-drawn free circuits, our new coildata leaflet, and information on matched receiver components. A speedy mail order department is at your service and remember, all Osmor lines are guaranteed. (Trade enquiries invited). Dept. C.W.1. OSMOR RADIO PRODUCTS, Ltd., Bridge View Works, Borough Hill, Croydon. Tel. Croydon 5148-9. [0046

MALDEN TRANSFORMER SUPPLIES of 80-watt fluorescent ballasts, complete starter but less 5ft tube, 35/-; 40-watt ditto, 25/-; Variolt, continuously variable double-wound transformer, 0-7½ amps and 0-330v 60-watt, 50/9; metal rectifiers, 12v 2½amp, 9/8, battery chargers, 6 and 12v, 2½ amps, 42/6; all new, 250v a.c.—200, Cambridge Rd., Kingston-on-Thames. [0058

COMPONENTS—SURPLUS AND SECONDHAND

C. J. EMMS, Ltd.

RECTIFIERS, full wave bridge type, as follows: 1 amp, 12 or 6v, 12/6; 4 amp, 12 or 6v, 15/-; 5 amp, 12 or 6v, 17/6; 10 amp, 6 or 12v, 22/6; 24v 1 amp, 11/-; 24v 4 amp, 30/-.

NEW sliding resistance sets from 1 to 4 amp 14Ω to 12 amp 1Ω 7 in all, 30/- per carton.—26a, Colberne Mews, London, S.W.10. [Frecantile 8341. [0201

MAGSLIPS at 1/10 to 1/20 of list prices, huge stocks, please state requirements.—K. LOGAN, Westalley, Hitchin, Herts. [0233

SUMMER sales, rock-bottom prices, buy now and save pounds; s.a.e. lists.—Annakin, 25, Ashfield Place, Otley, Yorks. [8815

NEW Slydlock fuses, 10 amps 1/-, 20 amps 1/6; rotary switches, Elan type D.P., 10 amps 2/-, 20 amps 2/6; 2-pole key switches 2/-; Jack type Pilot lights 1/-; 6mfd 150v electrolytic condensers 1/-; 500mfd 250v D.C. 5/-; 2,500mfd 40v D.C. 5/-; 5-pin 5 amp Nilphan sockets 6/-, 2½in Elliott meters, moving coil voltmeters 0/25 and 0/150 12/6; ditto 0/5 10/-; ditto 0/1½ 12/6; chokes Rich and Bundy type 11 amps 10 mh 12/6; .6 amp 500 mh 12/6; Westinghouse F.W. rectifiers 40 volts 11 amps 25/-; 150 volts ½ amp 20/-.—Harris, The Haven, Bournemouth.

LOOK!—Plan position indicators containing 17 valves—2 VT60A (807), KT24, 2 DDL4, MH4, VR78, 7 VR65A, HVR2, 2 UU6, large 250/250 power pack giving 500.0/500v (twice), 6.5v 2.0/2v, 4v (twice), 4,000v EHT (approx.), M type motor with reduction gearing (worm and spur), scanning coils with slip-rings, large quantity of other parts, including 22 toroidal, WW, and other pots, 24 Mansbridge condensers (11-10mfd 450v and others up to 5,000v), switches, 8 knobs (fluted), 14 jacks, fuses micro-switch, dial light, 70 vitreous and other resistances and condensers, etc.; the whole mounted in handsome heavy gauge steel cabinet, 20¼in × 27in × 60in high, finished in black, with hinged doors and plated handles; price (unused) £8/15 each carr. paid (cabinet alone worth more).—K. M. Logan, Westalley, Hitchin, Herts. [0233

GALPINS

ELECTRICAL STORES

408 HIGH St., LEWISHAM, S.E.13

Tel.: Lee Green 0309 Nr. Lewisham Hospital

TERMS: CASH WITH ORDER. NO C.O.D. All goods sent on 7 days' approval against cash.

EARLY CLOSING DAY THURSDAY

MAINS TRANSFORMERS (By well-known makers). Input 100 & 230 volts, output 6 volts 1½ amps twice, price 7/6 each, post 1/-; another 200/250 input, output 25 volt 4 amps C.T. 25/- each, carriage 1/6.

RECTIFIERS, input 75 volts, output 50 volts 1 amp. 10/- each, post 2/-. Condensers 10 M.F.D. 250 volt wkg. 3/6 each; 8 M.F.D. at 1,000 v/wkg. 7/6 each; 8 M.F.D. 2,500 v/test, 10/- each.

EX-U.S.A. W.D. ROTARY TRANSFORMERS, 12 volts D.C., input 500 volts, 50 m/amps, 275 volts 100 m/amps D.C. output. Complete with smoothing switches, fuses, etc., as new, 17/6 each, carriage 2/6, can be run on 6 volts, giving half the stated output.

MAINS TRANSFORMERS (NEW), 200/250 volts input, in steps of 10 volts, output, 0, 6, 12, 24 volts 6 amps, 42/6 each, post 1/6. Another as above but 10-12 amps, 55/- each, post 1/6; another, as above but 25-30 amps, 75/- each, carriage 3/6; another, input as above, output 0-18-30-36 volts 6 amps, 47/6 each, post 1/6.

EX-NAVAL ROTARY CONVERTERS, 110 volts D.C. input, output 230 volts A.C. 50 cycles, 1 phase, 250 watts capable of 50% overload, weight 100 lb., price £10/10/- each, carriage forward.

ROTARY CONVERTERS, 24-28 volts D.C. input, 1,200 volts 70 m/amps, D.C. output, 10/- each, P.P.

SWITCHBOARD METERS, 4in. scale moving coil (D.C.) only 0 to 14 amps, 17/6 each, post 1/6.

MAINS TRANSFORMERS (NEW), input 200/250 volts in steps of 10 volts, output 350-0-350 volts 180 m/amps, 4 volts 4 amps, 5 volts 3 amps, 6.3 volts 4 amps, 45/- each, post 1/6; another 350-0-350 volts 180 m/amps, 6.3 volts 8 amps, 0-4-5 volts 4 amps, 45/- each, post 1/6; another 500-0-500 volts 150 amps, 4 volts 4 amps C.T., 6.3 volts 4 amps, C.T., 5 volts 3 amps, 47/6 each, post 1/6; another 425-0-425 volts 160 m/amps, 6.3 volts 4 amps, C.T. twice 5 volts 3 amps, 47/6 each, post 1/6.

MAINS TRANSFORMERS (NEW), input 200/250 volts in steps of 10 volts, output 350-0-350 volts 300 m/amps, 6.3 volts 8 amps twice, 4 volts 4 amps, 5 volts 4 amps, 70/- each, carriage 3/6; ditto, 450-0-450 volts 250 m/amps, 6.3 volts 8 amps twice, 4 volts 4 amps, 5 volts 4 amps, 70/- each, carriage 3/6; another, input as above, output 500-0-500 volts 250 m/amps, 6.3 volts 8 amps twice, 6.3 volts 4 amps, 4 volts 4 amps, 5 volts 4 amps, 75/-, carriage 3/6. Another, wound to (electronic) specifications, 350-0-350 volts 250 m/amps, 4 volts 8 amps, 4 volts 4 amps, 6.3 volts 8 amps, 0-2-6.3 volts 2 amps, 70/- each, carriage paid; another, input as above, output 500-350-0-350-500 volts 250 m/amps, 6.3 volts 6 amps, 0-2-6.3 volts 2 amps, 0-4-5 volts 4 amps twice, 75/- each, carr. 3/6.

MAINS TRANSFORMERS (NEW), suitable for spot welding, input 200/250 volts, in steps of 10 volts, output suitably tapped for a combination of either 2-4-6-8-10 or 12 volts 50/70 amps, 95/- each, carriage 7/6.

MAINS TRANSFORMERS, 230 volts input, 150-0-150 volts 200 amps, 6.3 volts 8 amps, 5 volts 2 amps output, 23/- each.

AUTO WOUND VOLTAGE CHANGER TRANSFORMERS, tapped 0/110/200/230 volts 350 watts 55/- each, post 1/6; as above, but 500 watts 70/- each, carriage 3/6; as above, 200 watts, 40/- each, post 1/6.

EX-RADAR MAINS TRANSFORMERS, 230 volts input 50 cycles 1 phase, output 4,500-5,000 volts approx. 80 m/amps, 6.3 volts 2 amps, 4 volts 1½ amps, 2 volts 2 amps, these transformers are new, immersed in oil, can be taken out of the oil and used as television transformers giving output of 10 m/amps, overall size of transformers separately 5½in. × 4½in. × 4in. and 3in. × 3in. × 2½in., price 75/- each, carriage paid.

ELECTRIC LIGHT QUARTERLY TYPE CHECK METERS, all for 200/250 volts A.C. 50 cycles 1 phase, 5 amps load, 17/6 each, post 1/6; 10 amp 21/- each, post 1/6; 20 amps load, 25/- each, post 1/6.

POWER UNITS, input 200/250 volts, output 36 volts 50 amps, ex Gov't. Surplus, condition as new, £25 each, carriage forward.

ROTARY TYPE DIMMER RESISTANCES, 80 ohms., ½ to 10 amps 15/- each, carriage 2/-.

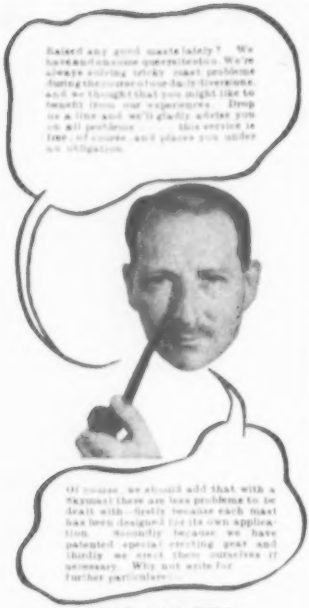
Raised any good masts lately? We have and in some quarters too. We're always solving tricky mast problems during the course of a day in Inverness, and we thought that you might like to benefit from our experience. Drop us a line and we'll gladly advise you on all problems . . . this service is free, of course, and places you under no obligation.
Of course, we should add that with a Skymast there are less problems to be dealt with—firstly because each mast has been designed for its own application. Secondly because we have patented special erecting gear and thirdly we erect them ourselves if necessary. Why not write for further particulars?

SKY-MASTS

BEADON GARAGE, BEADON RD., LONDON, W.6. Phone: RIVerside 1183

SOUTHERN RADIO'S WIRELESS BARGAINS

WALKIE-TALKIE (TRANSMITTER-RECEIVER). Type 38 Mark II. Complete with 5 valves, Throat Microphone, Headphones and Aerial. 7 mc/s. Amateur Band suitable for field use. Powerful Superhet Receiver. Modulated Transmitter. Guaranteed ready for the Air, less batteries. **£4 17 6.** Plus 2/6 Post.

TYPE 18 TRANSRECEIVERS, 6-9 mc/s. Perfect, **£7/10/-.** Plus 7/6 Carr.

R109—8 VALVES SHORT-WAVE RECEIVERS, enclosed speaker and vibrator pack for 6 volts 1.8-8.5 mc/s., complete in metal case, **£7/15/-.** Plus 7/6 Carr.

G.E.C. "MINISCOPE" M8618, MINIATURE CATHODE RAY OSCILLOSCOPES. 1½in. Tube. Time Base, etc., etc. Brand new in Maker's Sealed Cartons with Leatherette Carrying Case—**£15 10/-,** plus 5/- carriage.

LUFBRA HOLE CUTTERS. Adjustable from ⅜in. to 1¼in. for use on Wood, Metal, Plastic, etc., **3/9.** LUFBRA FLY CUTTERS, **14/6.**

THROAT MICROPHONES. Magnetic type complete with long lead and plug, **4/6.**

PLASTIC TRANSPARENT MAP CASES, 14 inches by 10½ inches. Ideal for Maps, Charts, Display, Photographs, etc., **5/6.**

STAR IDENTIFIERS. With Hydrographic Office Modifications A-N Type I. Complete in case, **5/6.**

WESTECTORS. Type WX6 and WI12, **1/- ea., 11/- doz.**

MARCONI AERIAL FILTER UNITS. Type "916" in conformity with P.O. Specification. Full instructions for fixing, **4/-.**

CONTACTOR TIME SWITCHES. 10-hour movement, 2 impulses per second. Thermostatic Control in soundproof Cases, **11/6.**

VISUAL INDICATOR UNIT Type 3 (10Q/4). Contains two Moving Coil movements, two Neons, etc. Easily convertible to very efficient M.C. Meters. **11/-.** Conversion fully described in "W.W." Sept. 1951.

RESISTANCES. 100 Assorted values Wire-ended ½-2 watts, **12 6** per 100.

CONDENSERS. 100 Assorted Tubular and Mica—up to 2 mfd., **15/-** per 100.

Full list of Radio Publications, 2½d.

SOUTHERN RADIO SUPPLY LTD., 11, LITTLE NEWPORT STREET, LONDON W.C.2. *GERrard 6653.*

RADIO CLEARANCE, Ltd., 27, Tottenham Court Rd., London, W.1. SPECIAL offer of electrolytic condensers capacity, voltage, size, type of mounting, price post paid, in that order.—400, 6v, 1in×⅞in, clip, 2/6; 150+250, 6v, 1in×2in, lug, 2/6; 500+500, 6v, 1in×3in, lug, 2/6; 1,500, 1in×3in, clip, 5/-; 30+50, 150v, 1¼in×2in, clip, 5/3; 40+40 150v, 1¼in×2in, clip, 5/3; 40, 150v, 1in×2in, clip, 2/6; 20+20, 275v, 1in×2in, lug, 4/-; 16+32, 275v, 1⅛×2in, lug, 4/-; 16+16, 275v, 1in×2in, clip, 4/-; 32+32, 275v+50mf, 25v, 1in×3in, lug, 4/6; 60+100, 275v, 1⅝in×3in, lug, 5/6; 100, 275v, 1¼in×2in, clip, 3/9; 50, 350v, 1¼in×2in, clip, 5/3; 32×32, 350v, 1⅝in×2in, clip, 4/9; 16+16+16, 350v, 1¼in×2in, clip, 5/5; 40+40+20, 350v, 1¼in×3in, lug, 5/5; 16, 350v, ⅝in×2in, lug, 2/3; 40+40, 300v, 1in×3in, lug, 4/6; 10, 450v, ⅝in×2in, lug, 2/6; 16, 450v, ⅞in×2in, 5/5; 20, 450v, 1in×2in, lug, 5/5; 32, 450v, 1¼in×2in, clip, 4/-; 16+16, 450v, 1in×3in, lug, 5/5; 24+12, 450v, 1⅝in×2in, clip, 5/5; 16+16, 450, 1¼in×2in, clip, 5/6; 32+32, 450v, 1⅝in×3in, clip, 6/-; 30+30, 450+20mf 25v, 1⅝in×3in, lug, 6/-; 15+15, 450+20mf 25v, 1⅝in×3in, lug, 5/5; 200mf, 6v, ⅝in×1¼in, clip, 2/3; 100mf, 12v, ⅝in×1¼in, wire, 1/9; 1,000mf, 6v, ⅝in×2in, clip, 2/6; 8mf, 450v, 1in×2in, clip, 3/-; 50mf, 12v, ⅝in×1¼in, wire, 1/9; 150mf, 25v ⅝in×1¼in, clip 2/-; 250mf, 12v, ⅝in×1¼in, wire, 2/3; 350mf, 25v, 1in×2¼in, clip, 2/9; 16+16mf, 450v, 1¼in×2in, clip, 4/3; 40+40mf, 275v, 1⅝in×2in, clip, 5/9; 16+32mf, 450/525v 1⅝×2in, clip, 5/6; 24+24+16mf, 350/425v, 1⅝×2in, clip, 4/9; 60+200mf, 275/350v, 1¼in×4¼in, clip, 6/6; 24+16+8mf, 450v, 1⅝in×2in, clip, 4/-; 6,000mf, 12v, 1⅝in×4½, lug, 4/-; 1,000mf, 12v, 1in×2¼in, clip, 3/-; 4mf, 150v, ⅝in×1¼in, 1/-; 60+100mf, 350v, 1¼in×4¼in, clip, 6/6; 8mf, 750v, 1¼in×4¼in, clip, 4/-; 5,000mf, 12v, 1⅝in×3in, clip, 4/-; 500mf, 12v, 1⅝in×2½in, clip, 2/9; 8mf, 550v, ⅝in×2in, 2/-; all are all cans, some with cardboard sleeves, all voltages are WKG, all new stock, some limited quantities. Trade supplied most types.

TELEVISION!—2 Set of Components—comprising line output trans., with E.H.T. winding to give 7kV, using EY51 (heater winding for EY51 also included), and fitted with width control scanning coils, low impedance line and frame focus coil (res. 10,000Ω; current approx. 20 mA); the set of 3 for 42/-, plus 1/6 post, diagram of line trans. supplied.

PERSONAL receivers. 3 valve T.R.F. using 1T4s, contained in handsome bakelite case with lift-up lid, size 7×6¼in×5in with lid closed, plastic carrying handle, fram AE in lid, these receivers cover the medium wave band and operate from self-contained dry batts., standard types W1435 and U2, output to a pair of lightweight 'phones (H.R.) controls, SM tuning and reaction, opening lid switches on, supplied brand new, with valves, batteries, 'phones, an ideal set for invalids, hosp. patients, etc., these receivers are not Govt. surplus and are offered ready to play, carr. paid, £4/10.

CHASSIS in steel, 5¼×1¼in drilled 5 button base holes, 1/9. 5×9×1¼ drilled 5 button base holes, 2/5; all 14¼×10×2¾ drilled 10-B8A, 5 int. octal, etc., 3/-; 4/5; primary 0-110-210-240v 50c/s, secs 300-0-300v 80mA, 4v 2a, 6.3v, 2.5v 15/6; superhet coils 1¼×1⅛, formers M. wave H.F., AE, Osc., L. wave H.F., AE, Osc., 1/9 per coil; I.F. trans. 465kc/s 1⅛×1¼×4in, iron cored, 8/-; pair; meters 2in square bakelite case, 0-5ma, 6/6; 0-500v d.c. with series res. 7/6. Rotary power units, type 104, p.m. rotary mounted on chassis with supp. input 12v d.c. output 250v 60ma 6.5v, 2.5a, d.c. 7/6, type 87 24v input, outputs as 104, 7/-, post paid; plugs and sockets, bakelite with keyway, 5/-; 1/6 pair; focus coils, low res., 200Ω, standard TV, 8/6, can be had as alternative with slit if required; 6½in loudspeakers p.m., less trans., boxed, 12/6 post paid.

SMALL size, 4P 5w switches, 1in spindle, 2/9, standard Yaxley-type switches, 2¼in spindle, 4P 5w, 2/9; 3¼in spindle, small size, 465kc/s I.F.s, iron cored, 2¼in×1in×1¼in, 9/- pair; 6½in P.M. speakers, with transformer (5,000/50), 16/6 post paid; small size O.P. trans., 10,000/50, 5/6.

VITREOUS res., 5k 20w, ⅝in×3in, with clips, 1/6; carbon V.C., 10k small, L/S, 3in spindle, 1/9; 3-gang conds., 2×.0005, ceramic ins., 1in spindle, 6/-.

RADIO CLEARANCE, Ltd., 27, Tottenham Court Rd., London, W.1. Tel. Museum 9188. [0015

MORRIS, 89, Tottenham Court Rd., W.1. (Near Goodge St. Tube.)

OCTOBER offers, brand new Collaro auto-changers, complete heads, original cartons, RC 500, £11/19/6; RC 3/521, three-speed dual head, £14/19/6.

MIDGET radios, sensational offer! Cadet a.c./d.c. mains portables, ivory plastic with carrying handle, magnificent tone and volume, guaranteed, complete, ready to play, £6/19/6.

ALL-WAVE superhet 5-v. midget, 2 short bands, famous maker, ivory plastic, £9/19/6, guaranteed.

VALVE bargains: VR108 (9D2), 3/11; VT171 (1R5), VT172 (1S5), VT173 (1T4), VT174 (3S4), 11/6; VT59 (MU14), 9/6; VR56 (EF36), 9/6; VT154 (12A6) 8/6.

5,000 swing Dixie classical records, 2/6 and 3/6; no lists; callers only; 9-6 week-days 9-1 Saturday. [0257

SOUTHERN RADIO SUPPLY Ltd., 11, Little Newport Street, London, W.C.2. See our displayed advertisement, page 120.

RELAY rectifiers, 18mm. 40ma, ultra compact, h.w. or c. tap, all voltages, single or qty.—Champion Products, 45, Uganda Way, London, N.21. [0102

PRE-set superhet tuner unit for Williamson with tone control 7k.LP. £12/10; also tone control unit, two EF37, £5/5—26, Kings Drive, L.P.E., Leicester. [8997

This Month's Offers

FREQUENCY TUNING FORK for operating L.F. Phonic Motor, fork tines of mild steel. Constancy of frequency 1 in 2,000 with ordinary room temperature changes.

LOW FREQUENCY PHONIC MOTOR, designed for use with above Fork. Laminated 4-pole stator, 6-pole rotor running on ball-bearings. Stator poles wound and designed for supply from intermittent D.C. Mercury filled flywheel on rotor spindle for smooth running. Write for full particulars.

WAVEMETERS. R.C.A. Crystal Calibrated Type T.E.149. Accuracy 0.005 per cent., 200 kc/s. to 30 Mc/s.

MOTOR PUMPS. Stuart Turner No. 12, 230 v. A.C. New, **£10 10/-.** Lesdix Motor Pump for 12 volt D.C. supply. Motor and centrifugal pump mounted on channel irons, **£6 15 0.**

INSTRUMENT RACK. Ex-G.P.O. 3in. x 1¾in. Channel with L-shaped base. 5ft. 9in. high, 20in. wide, **£3**; 6ft. high, 20in. wide, **£3**; 3ft. 9in. high, 20in. wide, **$0 -**; carriage extra.

CONDENSERS. Ultra short wave variable. Trolitul insulation, ball-bearings, new, **5/-** post 6d. 4-gang variable air spaced condenser, new, **4/6**, post 9d. Fixed condensers, 230 volts, paper, 1 - 1 mfd., **10 - doz.**, post 9d.

ROTARY CONVERTERS. D.C. to A.C., 1 K.W., 220-220 volts, 50 c/s., S.P. with Auto Transformer, ex-Admiralty pattern in good condition, **£25.** Write for list. Other sizes available for prompt delivery.

LIGHTING PLANTS. A.C. and D.C. Small 350 watt 12 v. D.C. Briggs & Stratton to 22 K.V.A., 400-230 volt A.C., 3 ph. Plants all reconditioned and tested. Send for list.

INSTRUMENT INSPECTION LAMPS. 1¼in. dia. front glass, 3in. long with on-off switch in body, 5ft. armoured flex. Fitted 2-pin plug for battery, take screw-in flash lamp bulb, **7 6**, post 9d.

ELECTRADIX RADIOS

Dept. A, 214 Queenstown Road, London, S.W.8

Telephone: MACaulay 2159

FIDELIA *De luxe*

Hand built high fidelity equipment at modest cost is perhaps the most concise description of the whole of the Fidelia range. Designed throughout to provide first class reproduction from radio and records the basic Fidelia design has considerable departures from the usual circuit arrangement of mass produced equipment. All models include variable selectivity, special detector circuit, non-distorting A.V.C. and triode output stages. Brief details are:—

Fidelia Minor 6-valve model with 5-watt push-pull output, **£17 10/-.**

Fidelia Standard 7-valve model **£21 15/-.**

Fidelia Plus 8-valve model, **£24 5/-.**

Fidelia De Luxe illustrated above, 9-valve model with 7-watt triode push-pull output stage, **£25 5/-.**

Fidelia Major 10-valve model with special preselector circuit, **£31 10/-.**

Technical data sheets willingly sent on request, all equipment guaranteed for 12 months. Telephone: Peacehaven 3186.

ELECTRO-Acoustic DEVELOPMENTS

2 Amherst Road, Telscombe Cliffs, Sussex.

TELE-RADIO
(1943) LIMITED
177, EDGWARE RD., LONDON, W.2.
Phone : PAD. 5606, PAD. 6116.

Shop Hours : Monday—Saturday, 9 a.m.–6 p.m. Thursday, 9 a.m.–1 p.m.

ELLISON MAINS TRANSFORMERS
(All upright mounting)

Type 162. Pri. 200 v. 220 v. 240 v. Sec. 250-0-250 v. 60 mA., 5 v. 2 a., 6.3 v. 3 a. £1 3 3

Type MI21. Pri. 200 v. 220 v. 240 v. Sec. 350-0-350 v. 80 mA., 5 v. 2 a., 6.3 v. 3 a. £1 8 6

Type 137. Pri. 220 v. 230 v. 240 v. Sec. 250-0-250 v. 120 mA., 5 v. 3 a., 6.3 v. 7 a. £1 19 0

Type 199. Pri. 200 v. 220 v. 240 v. Sec. 350-0-350 v. 120 mA., 5 v. 5 a., 6.3 v. 5 a. £2 1 3

Type D199. Pri. 200 v. 230 v. 250 v. Sec. 350-0-350 v. 120 mA., 0-4-5 v. 3.5 a., 4 v. 5 a. C.T., 6.3 v. 5 a. C.T. £2 4 3

Type SP71. Pri. 210 v. 230 v. 250 v. Sec. 425-0-425 v. 150 mA., 5 v. 3 a., 6.3 v. 4 a. £2 19 3

Type TV21. Pri. 210 v. 230 v. 250 v. Sec. 2.5 kV. 5 mA., 2-0-2 v. 4 a., 4 v. 2 a. £2 8 6

Type T238. Pri. 200 v. 220 v. 240 v. Sec. 350-0-350 v. 250 mA., 0-2-4 v. 2 a., 0-4-5 v. 3 a., 6.3 v. 6 a., 4 v. 8 a. £4 10 0

Type FI05. Pri. 230 v. Sec. 6.3 v. 1.5 a. 9 0

Type 114. Pri. 200 v. 220 v. 240 v. Sec. 0-4-6.3 v. 4 a. £1 3 3

Type SP70. Pri. 210 v. 230 v. 250 v. Sec. 12 v. tapped 6.3 v. 3 a. £1 1 9

ELLISON LF CHOKES

30H. 20 mA. 500 ohms 15 9
10H. 150 mA. 85 ohms £1 7 9
5H. 250 mA. 50 ohms £1 9 3
10H. 60 mA. 400 ohms 6 9
10H 80 mA. 200 ohms 10 3

OAK SWITCHES
WE SPECIALISE IN ASSEMBLING OAK PAXOLIN AND CERAMIC SWITCHES TO INDIVIDUAL REQUIREMENTS. QUOTATIONS BY RETURN OF POST. DELIVERY 2/3 DAYS.

18 S.W.G. ALUMINIUM CHASSIS
REINFORCED CORNERS.

8in. x 6in. x 2½in. 7 6
12in. x 6in. x 2½in. 8 6
14in. x 10in. x 2½in. 11 0
17in. x 10in. x 2½in. 12 6
17in. x 10in. x 2in. STEEL 10 6
17in. x 10in. x 3in. STEEL 12 6

BRANDENBERG 6-9 KV. E.H.T. UNITS £6 6 0

HIVOLT E.H.T. UNITS 9-12 KV. £9 10 0

.0005 mfd. 3 GANG CERAMIC INSULATION 7 6

OSMOR COIL PACKS, ETC.

L.M.S. ..... 52- H.F. STAGE £1 1 8
M.S.S. ..... 54-2 H.F. STAGE £1 1 8
L.M. GRAM 43-4 H.F. STAGE 18 8
Battery or Mains Portable L.M.S. £2 14 2
T.R.F. Medium and Long £2 3 4
Individual Coils 4 0
Dials 9½in. x 9½in. L.M.S. and M.S.S. £1 4 6
Escutcheons for Dials 4 0
Frame Aerials 2 6

ALLEN WIDE ANGLE 38 mm.

Deflector Coils DC300 ..... £2 5 0
Width Control, GL18 ..... 10 0
Linearity Coil GL16 ..... 10 0
Focus Coil FC302 ..... £1 15 0
Line Scan Transformer LO308 ..... £2 10 0
Frame Transformer FP305 ..... £1 1 0
Circuit Diagram 9

HAYNES WIDE ANGLE 38 mm.

Scanning Coils S27 ..... £2 5 0
Line Transformers 12 KV. with Rectifiers T27 ..... £6 12 6
Line Transformers 12 KV. less Rectifiers T34 ..... £2 10 0
Width Control 12 6
Frame Output Transformers TK10/41 ..... £1 18 0

ELAC 38 mm. FOCUS UNITS

W22 Mk. II for Tetrode C.R.T.'s £2 12 6
W25 Mk II for Triode C.R.T.'s £2 17 6

SUPREME RADIO, 746b, Romford Rd., Manor Park, London, E.12. Tel. Ilf. 1260. Est. 17 yrs. bargain offers.
P.M. SPEAKERS, 2/3 ohm V/coil, all less trans. 5in 10/6 ea. 8in 15/11 ea. 10in 18/11 ea.
LOOK: cheapest in London; manufacturer's surplus A.C. mains amplifiers, 4 watts output, complete with 10in M/Eng speaker, supplied with leads and tested before dispatch; our price £5/15, inc. pack/post. ½ meg V/cont with ¼in spindle, 1in dia. 1/- ea. Wire-end Germanium crystal diodes for crystal sets with circuit, 3/- ea. 8 mfd 500v tub/cardboard tag end condensers, 2/- ea. Aluminium can type 8mfd 500v cond, 2/9, 16mfd 500v 3/6 ea; 16+16mfd 500v 5/9 ea, 32mfd 500v 5/9 ea.
CARDBOARD wire end bias cond, 50mfd 50v 9d ea, 50mfd 12v 9d ea, 25mfd 25v 1/- ea. Westinghouse type metal rec. 250v R.M.S., 65 m/a, 5/6 ea; 5 meg carbon vol/cont, 7½d ea; 5-50pf Philips beehive type trimmers, 10d ea. B.70 valve holder, complete with screen can and spring, 1/4½ complete; twin balanced feeder, for T.V., 4d per yd, 80-ohm type; metal speaker grills, ⅛in thick 11¾in×7in, louvred, new mottled in brown, 10/ ea. Still a few left of this bargain line, vol/controls, standard size, with ¼spindle and s.p. switch, 2 meg 100K ohms, 25K ohms, 10K ohms, and 5K ohms, 2/3 ea; L.T. heater trans. 0-200-250v 6.3v at 1.5 amp. or 4v type at 2 amp, 6/9 ea.
P.F. CONDENSERS, 40pf, 50, 60, 65, 70, 100, 307, 550 and 1,800pf, all at 2/6 per doz, or ass. doz.
FLAT type 0.2 amp 650 ohm droppers, tapped for 200-250v, 1/6 ea; 2yd length single screened wire, 1/- per length. Panels with 6 resistors, 1pf and WX6 Westector, 1/- ea; 28-way tag strip—break as required, 1/- ea.
MANY other bargain radio and television component lines in stock; terms c.w.o., no c.o.d.; send 9d extra for postage orders under £5.
2½d S.A.E. all enquiries and list. [0021

G.E.C. 7-watt V.H.F. mobile transmitter/receivers, complete with 12v rotary power pack, 80.9, 81.1, 81.3 mc/s, new, £47/10 each.
¼H.P. 110/250v A.C. repulsion motors, 1,000/1,450 r.p.m., by Century and Neco, £5 each.
DENCO D.C.R.19 receiver, £50; G.E.C. single channel V.H.F. transmitter/receiver, Cat. No. B.R.T.600; special offer semi-surfaced mains trans. 250/0/250 60ma. 5v, 2amp, 6.3v, 4amp, 15/5 each; communication receivers in stock Hammerlund Super Pro, H.R.O. Seniors, C.R.100, A.R.88D., A.R.88L.F., etc., all in perfect order. R.1155 receivers in new condition; your enquiries are invited for rotary convertors and electric motors, most sizes and types available from stock, special clearance of F.H.P. electric motors, 55/- 110v 250v a.c.
UNIVERSAL a.c./d.c. motors, suitable for sewing machines, 40/- each; 12v-15v a.c./d.c. motors with extended spindle, suitable for models, etc., 9/5, 20 watt P.A. rack mounting amplifier, new and complete with heavy duty a.c. power pack 200/250v, PX25 P.P. output, £5/10, less valves; new moving coil microphones, hand type, heavy duty and complete with 12yd screened cable £3/15, 20ft telescopic tubular T.V. mast, 47/6 each; large selection of test equipment; multi-range meters, valve testers, signal generators, oscilloscopes, bridge meggers and meggers, etc., all at reasonable prices; hand bearing prismatic compasses, perfect, 45/- each; very large stocks of transmitting valves, Klystron, of all types, send us your requirements; special offer of new, not ex-W.D., mains transformer, semi-shrouded 200/250v tapped primary, 250-0-250, 100ma, 5v 5amp, 6v 4amp, 21/6 each; large stocks of L.T. transformers, special sizes and ratings wound to specification; auto-record changers in stock from £15/2/6 to £18/10; switchboard mounting volt meters, ampmeters, various ranges a.c. and d.c. available at cheap prices to clear; large stocks of enamelled wire, 16 and 20 s.w.g.
D.B.S.G. Special offer, H.R.O. coils, 48-96 m/s and 180/450 k/s, 45/- each, quantity of litz and nickel chrome wire available; type 74 indicator units, complete with tube, as new £6 each; Hallicrafter Super Skyrider SX28 in stock; Eversheds bridge megger, 500v 1½kw e.d.c. rotary converter, 220 d.c./250 a.c., complete with igranic starter, £28; large selection of American Panoramic high-voltage working condensers, 5 m/a meter rectifiers, 6/3 ea.
HAMMERLUND B.C. 779B, perfect order, rack mounting, £42/10; Q-Max, Q-5/10 receiver, new £58, prices do not include postage.
D.S.T. 100 receivers, perfect, £26; Celestion 12in P.M. speakers, heavy magnets, £5/10.
SERVICE RADIO SPARES, 4, Lisle St., W.C.2. Gerrard 1734 [0188

SELENIUM rectifiers (S.T.C.), 110v, 10 amps., bridge, unused; £6/15 ea., carr. paid.—P. B. Crawshay, 166, Pixmore Way, Letchworth, Herts.
NEW trans, primary, 205-225-245v, sec. 300-0-300v at 50ma, 6.3v tapped, 4v 2.2amp and 6.3v at 1 amp, boxed, 15/-, post 1/6, resistors, standard values, ¼w and ½w, 3/- doz, assorted, your choice; 23 ohm w.w., 5w adj. tap 6/- doz.
ELECTROLYTICS, 8mf 500v, 2/3; 8mf 200v 1/-; 16mf 350v, 2/-; 16mf 500v, 2/6; 32mf 450v, 2/6; 25mf 25v, 1/4; 16+16mf 500v, can, 5/-; 32mf+8mf+8mf 350v, can, 4/-; speakers, 5in 8/-, 6½in 12/-, 10in 15/-; ceramics disc 20, 25, 30pf, 1/6 dozen; 50pf, 2/6 doz.
TUBULAR condensers, 1mf 550vw, 6/6 doz, 1,000 vw, .01mf, 7/- doz; .001mf, 5/- doz; also vibrators, valves, key-switches, radio and T.V. cabinets, low prices; send us list of your wants, money-back guarantee.—Rebus Electric, Ltd., Gladstone Place, Newton Abbot, Devon. [0214

MODULATED BC221 Xtal controlled frequency meter, range 125 Kc/s to 20 Mc/s, complete with Xtal, spare valves, calibration book and service manual, unused, £75; see our advertisement on page 58.—Radio Exchange Co., 14, St. Mary's, Bedford. [0012

The Foremost Name in Modern Microphones

LUSTRAPHONE
THE MASTER MICROPHONE

A NEW RIBBON-VELOCITY MICROPHONE
MODEL VR.53

Built to Broadcast Studio Standards

★ New Magnet and Ribbon System
★ Response Substantially maintained up to 14,000 c.p.s.
★ Output Level
20Ω—86 db. below 1v/dyne/sq. cm.
500Ω—72 db. below 1v/dyne/sq. cm.
★ Metal parts finished in Satin-Chrome

Full details of this excellent new microphone Model VR.53 will be sent on application to the makers :—

LUSTRAPHONE LTD
St. George's Mews, Regent's Park Road, N.W.1. Telephone: PRImrose 0630
Makers of Microphones for all Requirements

INDUCTA

TRANSFORMERS
of all types up to 25 KVA for Single or Three Phase operation, Phase Conversion, etc.

MAINS
Output and Special Purpose Transformers for Radio Equipment, Chokes, etc.

COILS
or Contactors, E.M. Brakes, Air Valves, etc., and COIL WINDINGS for all purposes.

SOLENOIDS
for A.C. and D.C. Operation.

A.I.D. Approved

W. F. PARSONAGE & Co LTD
INDUCTA WORKS
PARK RD · BLOXWICH · WALSALL

THE "FLUXITE QUINS" AT WORK

"A letter to soldering tonight,
Let's see if he does the job right.
This is too good to miss,
From the glasses on this
O.S. bods! He's using FLUXITE.

See that **FLUXITE** is always by you—in the home—garage—workshop—wherever speedy soldering is needed. Used for over 40 years in Government works and by leading engineers and manufacturers. Of all Ironmongers—in tins from 1/- upwards.

TO CYCLISTS! For stronger wheels that will remain round and true, here's a time tested tip. Tie the spokes where they cross with fine wire AND SOLDER. It's simple—with FLUXITE—but IMPORTANT.

FLUXITE
SIMPLIFIES *ALL* SOLDERING

Write for Book on the Art of "SOLDERING" and for leaflet on CASE-HARDENING STEEL and TEMPERING TOOLS with FLUXITE Protected

FLUXITE LTD.,
BERMONDSEY STREET, LONDON, S.E.1.

MAGSLIP transmitters 5in. No. 5. A.P.10961, large quantity, brand new, in tins, 45/- ea., post free.—P. B. Crawshay, 166, Pixmore Way, Letchworth, Herts. [0241

LOUDSPEAKERS, unrepeatable bargains. 5in P.M., 2-3 ohms, o/trans. 1 make 10/9, 4 for 40/-; o/trans., pent., tapped, 5/11; h/duty 4/11; p.pull., 7 and 15 ohms, 7/11; semi-midget v/contrls., 1/sp., L/P. ex. 900Ω and 1 meg., 4/9; condensers, 450vw 4mf 1/9, 16mf 2/9, 32×32 5/9; stamp list.—Radio Unlimited, Elm Rd., London, E.17 (Ker 4815). [0062

G. A. RYALL, "Utopia," Mayfield Road, Herne Bay, Kent, offers brand new post-free bargains; switches: single bank single pole 9-way Yaxley type 1/4, 2B 3P 6-way, no stop, switch is drilled for this, 1/4; smaller type switch, 5B TP 6-way, total five poles only, 2/5; also 2B 3P 5-way with coloured leads, 1/9; and one only with soldered tags, 2B 4-way, total of five poles, including one double bank, 1/4. Toggles Bakelite, 250v a.c., close either of two poles, 1/3, and 2P DT, change over, 1/9; all single hole fixing; and Bakelite panel switch marked On/Off, break 10 amps, four-hole fixing, 2/6. Paxolin panels, 12×8, undrilled, 5/9; voltmeters, 0-500v., separate series resistance, F.S.D. 5ma 2in square front, last few 4/9 each; and 0-50ma 2¾in (3¼in overall), 6/9, or best make, 8/9; signal lamps, panel, m/g, red or green with 12-24v bulb brass case and bakelite top with protection, 1/6 each; triple light cable over 5yds length, 1/4; plastic; screened twin, 5 yds. in two lengths, 1/4; triple plugs and sacks, 1/4 set. Manshridge condensers, fixing feet, heavy duty terminals, 250v N.I., 5/3, 4/9; ditto oil filled 11×7, 8/9; extra heavy terminals at side, first-class Bakelite fuse boxes, four-way, with two spare fuses, 5 amp cartridge, 5/9; small single 20 amp or 10 amp, with spare, 2/6; set four panels with over thirty 1-, 1/2-, 1/4 watt resistors, 5/6, and high grade panel with fixing bolts, 0.1mf and 4,700vw resistor and two 1/w, 2.1/5; 1mf Manshridge, upright or inverted, 2.1/5; radio mains suppressor units, four-division, fixing feet terminals, etc., 7/9; headphone sets, high resistance, complete with padded headbands, sponge rubbers on ear caps, and good class microphone, all wired into four cleft plug as illustrated in R.A.F. adverts, as new, 10/6 set, or less microphone 8/9. [0205

NOTICES

BRITISH SOUND RECORDING ASSOCIATION.—MEMBERSHIP is essential to all actively engaged or interested in really high quality sound recording and reproduction and is world wide. Fees are most reasonable and benefits considerable. First-class programmes of lectures and demonstrations have been arranged for the 1952-53 season and the new Northern Centre, meeting in Manchester, is making very good progress. The Portsmouth Centre is now well established. Information may be obtained from the Membership Secretary, H. King, 48, Mount View Rd., North Chingford, London, E.4, England. [0119

CABINETS

WALNUT radiogram cabinets, details.—Cabinetware, 18a, Herves Rd., Blackburn. [0009

WALNUT radiogram cabinets; stamp details.—S. Wisker, 501, Hale End Rd., Highams Park, E.4. [0009

RADIOGRAM cabinet, 35in. wide×33in.×17in. deep, veneered, unpolished, slightly scratched; £6.—Tel. Brixton 3618. [0969

WALNUT radiogram and television cabinets, soundly constructed; stamp details.—R. Shaw, 69, Fairlop Rd., Leytonstone, E.11. [0897

WANTED, EXCHANGE, ETC.

WANTED.

BC610 Hallicrafters, also spares; RCA ET 4336 series with spares; BC348 receivers, also TCS6, TCS12 and components.—McELROY ADAMS MFG. GROUP, Ltd., 46, Greyhound Rd., W.6. Tel. Fulham 1158-9. [0197

WANTED, valves PP5/400, 445, ACSG, TX25.—Box 2248. [0011

WANTED, Hart.ey or other quality speaker; all details to—Box 2449. [0064

WANTED, receivers A.P.R.4, also T.N. 16, 17, 18, 19, etc., and any radio test gear.—LESLIE DIXON & Co., 214, Queenstown Rd., Battersea, S.W.8. Macaulay 2159. [0176

VALVES, type 815 (R.C.A.) urgently required by manufacturing concern.—Box 1642. [0892

WANTED.—Teleprinter equipment of any type.—Gilfillan, 52, South St., Worthing, Tel. 8719. [0967

WANTED, RCA 4331 transmitters.—P.C.A. Radio, Cambridge Grove, Hammersmith, W.6. Tel. Riverside 5279. [0095

WANTED, quantity valves, type 805 and 807A. 805 must be either R.C.A. or G.E. manufacture.—Box 2446. [0765

RECEIVER unit and manual for W.S.21, tele-printer equipment of any type.—Gilfillan & Co., 52, South St., Worthing, Tel. 8719.

POLARISED relays required, types 4121, 4141, 4142, 4299, 520 any quantity or condition.—Harris & Gillow, 93, Wardour St., W.1.

WANTED.—Reversing motor generators, Type 23, Ref. 10KB/953.—R. J. Brown, Decca Radio Labs., 1-3, Brixton Rd., S.W.9. Reliance 4111. [0685

WANTED, laboratory test equipment, including standard signal generator, watt meter, oscilloscope, bridges, recorders; send price and details to—HATFIELD INSTRUMENTS, 175, Uxbridge Rd., Hanwell, W.7. Tel. Ealing 0779. [0037

DOES anyone possess a Murphy A104 table model with a visual-tuning device? "Baffle" wanted in excellent working condition.—Write D. Haines, 19, Belsize Crescent, N.W.3. [0965

RADIO COMPONENTS — SURPLUS

New and Unused—Trade Offers

SWITCHES. All one-hole fixing. Yaxley types, 2 bank, single pole, 6 way double spaced, no stop switch is drilled for this, 15/- doz. Smaller type, 2 bank, 2-pole, 6-way, total of five poles only, 15/- doz.

SLEEVING. High voltage ex-Govt. 2 mm., black, 5/- 100 yds. 3½ mm., black, 5/-, 100 yds. 4 mm., blue, 6/9, 100 yds. Perbraid, black, 2 mm., per gross 8/-. Varnished cambric 4 mm. brown, this slightly flattened but electrically sound, 7/6 gross.

TRIMMERS. 25 mm., preset with locknut, on ceramic, boxed singly, cellophane wrapped, 30/- gross, postage 4/-; ditto loose, cellophane wrapped, 18/- gross.

VITREOUS RESISTORS. L.T. types, 23 ohms tapped, 4 ohms, no tape, 3.5/9 tapped, 6/9 doz.; 3 doz. 15/-; per gross 48/-.

SLIDING RESISTORS on stand, worm drive, 25 amps 0.4 ohms, parallel wound, can be 0.8 ohm by slight alteration, 8/9 each.

CONDENSERS. Upright with feet, 1 mf. 500 v., 6/- doz. 5×3 250 v. N.I., heavy terminals, 4/6. 11×7 250 v. N.I., all filled, extra heavy terminals at side 8/6 each. Mica moulded 0.004 mf., 1,250 v. 4kg., 20/- gross, all perfect insulation.

FILTER BOXES. Metal with fixing bracket, base with cond. and res. co-axial input and output, in open ended cartons, 8/- doz. P.P.

VARIABLE CONDENSERS. 4-gang straight type, slightly soiled, 6/- 8/- P.P., or perfect 3/- each, plus post.

Terms C.W.O. or C.O.D. Full list on request.

G. A. RYALL,
"UTOPIA," MAYFIELD ROAD,
HERNE BAY, KENT

OPPORTUNITIES IN RADIO

Get this FREE Book!

ENGINEERING OPPORTUNITIES' reveals how you can become technically qualified at home for a highly paid key-appointment in the vast Radio and Television Industry. In 144 pages of intensely interesting matter, it includes full details of our up-to-the-minute home study courses in all branches of **TELEVISION and RADIO, A.M. Brit. I.R.E., City & Guilds, Special Television, Servicing, Sound Film Projection, Short Wave, High Frequency and General Wireless Courses.**

We definitely Guarantee
"NO PASS—NO FEE"

If you're earning less than £14 a week this enlightening book is for you. Write for your copy today. It will be sent **FREE** and without obligation.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY
356a SHAKESPEARE HOUSE,
17/19 STRATFORD PLACE, LONDON, W1

BIET

FOR A
16in. 5-CHANNEL SUPERHET TELEVISION RECEIVER BUILD THE "**TELE-KING**" INCORPORATING **ALLEN** WIDE ANGLE HIGH EFFICIENCY COMPONENTS.

The **LINE SCAN TRANSFORMER** type LO 308 is capable of fully scanning any C.R.T. from 9in. to 17in. (Double D) with an E.H.T. as high as 16 kV.

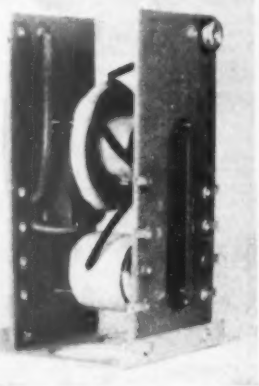

The **DEFLECTOR COILS** type DC 300 are designed for a 70 deg. scan with minimum deflection defocussing.

FOCUS COIL F 302.
FRAME TRANSFORMER FO 305.
LINEARITY CONTROL GL 16.
WIDTH CONTROL GL 18.
FRAME BLOCKING TRANSFORMER BT 314.
MAINS AUTO TRANSFORMER AT 310.
SOUND OUTPUT TRANSFORMER OP 117.
SMOOTHING CHOKE SC 312.
METAL PARTS AND SUNDRIES ARE ALL AVAILABLE.

Bernard's Publication the "**TELE-KING**" gives full instructions for building this receiver. Send 4d. stamp for full details of our quality components manufactured in our **CROWN WORKS** under expert supervision.

ALLEN
COMPONENTS LTD
(Specialists in the Manufacture of L.T. Transformers.)
CROWN WORKS,
197, LOWER RICHMOND ROAD, RICHMOND, SURREY
'Phone: Prospect 9013

WE are buyers of new or first-class V.H.F. equipment—transmitters, receivers, 56-150 Mc/s, aerials, power units, cables, connectors, etc.
W. F. DOWNER, 111, Bernard St., Southampton. Tel. 3816. [10057

WANTED, HRO coils, Rax, etc., A.R.88, BC348s, 827s, etc.—Details to R.T. & I. Service, 254, Grove Green Rd., London, E.11, Ley. 4906. [10163

WANTED, ex-manufacturers' or ex-Government radio equipment, large or small quantities of valves, electrolytics, speakers, meters also components.
LOWE BROS., 199, Mile End Rd., London, E.1. Ste. 2579. [16554

ALTHAM RADIO Co. pay highest prices in the trade for all American equipment, including test sets, transmitters, receivers, teleprinting gear, etc.—Tel. transfer charge, Manchester Deansgate 5587. [10226

WANTED, BC-610 Hallicrafters, RCA ET-4336 transmitters, SX-28, AR-88, S-27, HRO receiver and spare parts for above; best prices.—Write Box 864, c/o Sells Service, 82, Centurion Rd., Brighton, Sussex. [10081

WE purchase all types of domestic or ex-Government radio receivers and equipment; send full details or call and collect cash; large or small quantities.—Walton Wireless Stores, 48, Stafford St., Wolverhampton. [10146

WANTED, R.C.A. speech amplifiers type MI-11220 J or K and aerial tuning units BC 939 A. Hallicrafters speech amplifiers BC 614; offers, stating quantity and price to P.C.A. Radio, The Arches, Cambridge Grove, W.6.

WANTED, AN/APR-4 receiver, any units; any other good quality U.S. surplus radio and radar tubes, test sets; laboratory equipments, etc.; give condition and price in first letter.—Littell, Fairhills, Box 26, Dayton, 9, Ohio, U.S.A. [10254

WANTED; we will pay 10% more for the following American equipment; test sets with TS prefix, BC221, APR4 receivers, APR4 tuning units, BC342, BC312 power units, 1-5, 15 and PE95 teleprinter equipment.—Tel. immediately, transfer charge, Manchester, Deansgate 5587, Altham Radio Co. [10227

WANTED, new surplus valves of all descriptions, large or small quantities, types 725A/B, 805, 807, 813, 832, 100th, 250th, 2C40, 2C43, test instruments, receivers, transmitters, BC610, etc; best prices paid.—Write Pye-Hayes Radio, 606, Kingsbury Rd., Birmingham, 24. (Phone: Erdington 4942.) [18811

URGENTLY wanted.—VHF test equipment TS47AP, TS174U, TS69AP, TS84, TS124, BC221s and any other types; valves, Klystrons magnetrons 723/AB, receivers, APR4 and TN-16-17-18 tuning units, RCA AR88s, 827s, SX28s, 827CA and any late types; microwave equipment or spares, highest prices given; please write, call or telephone Jerrard 8410; prompt attention assured.—Universal Electronics, 27, Lisle St., Leicester Square, London, W.C.2. [10219

REPAIRS AND SERVICE

ARMATURE Re-winding Service to the Trade.

VACUUMS, drills, grinders, hood dryers, dental motors, vacuum cleaner armatures replaced from stock, 24-hour service, factory job guaranteed.
REGAM ELECTRIC, 95, Park Lane, Leeds, 1.

MAINS transformers rewound, new transformers to any specification.
MOTOR rewinds and complete overhauls; first-class workmanship, fully guaranteed.
F.M. ELECTRIC Co., Ltd., Potters Bldgs., Warner Gate, Nottingham. Est. 1917. Tel. 58555.

REPAIR service available for all types of amplifiers, tape or disc a speciality; despatch with full instructions to:—
BERNARD J. BROWN, 33, Goldhawk Rd., Shepherds Bush, London, W.12. [10217

REPAIRS to amplifiers, tape recorders and radios.—Adsn Spencer Electronic Co., 76, Huntingdon Rd., Southend-on-Sea. [19065

REPAIRS.—E.H.T., mains and O.P. transformers, field coils and chokes; also armatures and motors; new transformers designed to any specification, all work fully guaranteed.
WILLESDEN TRANSFORMER Co., Ltd., Rear of 21, Church Lane, Church Rd., N.W.10. Tel. Willesden 7095. [10076

MAINS transformers rewound or constructed to any specification, prompt delivery.—Bede Transformer Co., Ltd., Bedesway, Bede Trading Estate, Jarrow. [15196

KITS assembled, prototype and exp. electronic and radio built to spec., gram and tape amps., mixers, etc., tapes dubbed to disc at 78 or 33 r.p.m.—Henniger & Kerr, 15, Bonaly Rd., Edinburgh, 11. [19007

REWINDS and conversions to mains and output trans., clock coils, fields, pick-ups, etc., from 4/6; pp equipment a speciality; all work guaranteed.—N. L. Rewinds, 32, Blackbird Hill, N.W.9. Tel. Wordsworth 7791. [19055

ELECTRICAL measuring instruments of every make, multi or single range, repaired and standardised, prompt attention.—The Electrical Instrument Repair Service, 529, Kilburn Lane, London, W.9. Tel. Lad. 4168. [18852

24-HOUR service, 6 months' guarantee, any transformer rewind, mains outputs and i.f.s., etc.; all types of new trans. etc., supplied to specification; business heading or service card for trade prices.—Majestic Winding Co., 180, Windham Rd., Bournemouth. [16520

MISCELLANEOUS

PARKER'S sheet metal folding machine, HEAVY vice model, capacity 18 gauge × 2ft. wide, M.S. loose attachments for radio chassis making, weight 22lb., price 42/6; attachments 1/6 per foot; carriage and packing 4/-; send for details.—A. B. Parker, Wheatcroft Works, Wellington St., Batley, Yorks. [18995

WIMSHURST machine in good condition wanted.—Box 2056. [18968

ALPHA OFFERS



MAINS TRANSFORMERS
3-way mounting type. Primary 200-220-240 v., secondarys 350-0-350 v., 80 m.a.; 0-4 v., 5 a.; 0-6.3 v., 4 a.; 0-4-5 v., 2 a., **16/-** each.
As above with 250-0-250 v. Secondary winding, **16/-** each.

Ex-Govt. Equip. 350-0-350 v., 80 m.a. 2-6.3 v. Windings and 5 v. Tapped primary surface mounting, wax dipped all connections to Paxolin panel mounted on top, **22/6** each. Postage on above types 1/6 each.
The following are all ex-equip. in steel cases, with all connections to terminals on top.

T1. 220 v. A.C.
320-0-320 v. 95 m.a., 6.3 v. 3.1 a., 4 v. 2.5 a. Weight 24 lb., **27/6**.

T2. 220 v. A.C.
445-0-445 v. Weight 24 lb., **27/6**.

T3. 220 v. A.C.
265-0-265 v. 4 v. 2.5 a., 6.7 v. 7 a. Weight 24 lb. **27/6**.

T4. 220 v. A.C.
365-0-365 4 v. 4.5 a., 6.9 v. 4.2 a. Weight 14lb. **23/6**.

T5. 220 v. A.C.
275-0-275 v. 30 m.a., 4 v. 5 a., 4 v. 2.5 a. Weight 14lb., **25/6**.

T6. 220 v. A.C.
700 v. H.T., 4 v. 2 a. C.T., 4 v. 1 a. Weight 14lb., **21/-** each.

T7. 220 v. A.C.
1,540 v. 1.75 m.a., 2 v. 2 a., 4 v. .8 a. Weight 14lb., **22/6**.

FILAMENT TRANSFORMERS (as above)
F.T.1.
220 v. A.C., 4 v. 2 amp. Weight 6lb., **8/6** each.
F.T.2.
220 v. A.C., 4 v. 3.75 a., 4 v. 6.9 a. Weight 16lb., **10/6** each.
Carriage on T1 to T9 3/- each.

COLLARO MOTOR
Type 4-pole, shaded pole, variable speed A.C. 100/125 v., 200/250 v., **32/6** each.

SPEAKERS
Elac 3½in., **13/6**; Rola 8in., **14/-**; Goodmans 8in., **16/-**; Rola 10in., **27/6**.

ENAMELLED COPPER WIRE
14 S.W.G. **1/9**; 16 S.W.G. **1/9**; 36 S.W.G. **2/9**; 40 S.W.G. **3/-**; per ½lb.

SPECIAL PURPOSE VALVES.
VR123 **7/-**; 954 **2/9**; 955 **5/-**; 956 **3/3**; VR137 **2/9**; VR136 **6/-**; VU111 **4/6**; CV54 **4/-**; E1148 **2/-**; CV6 **2/-**; CV9 **4/-**; VU120A **4/-**; VT127 **8/6**; VT125 **8/6**; NT866 **6/6**; VT91 **7/6**; VT86A **6/6**; VT107A **9/6**.

CONDENSER CLIPS. Aerovox Type 2/- doz. Standard 1½in., 4/- doz.

VIEWMASTER.
Envelope for Holme Moss or Kirk O'Shotts, 5/-.

SPECIAL OFFER
Volume Control Morganite, 1 meg. with S.P.S. short spindle, **3/-** each.
PF SILVER MICA CONDENSERS. 50 pF, 200pF, 360pF, 180pF, 1,000pF. All **4d.** each. Many other sizes available.
Please mention this paper when ordering.
TERMS. Cash with order or C.O.D. List 3d. stamps.

MAIL ORDER ONLY. Please include postage: 6d. under 10/-, 1/- under 20/-, 1/6 under 40/-.

ALPHA RADIO SUPPLY CO.
5/6 Vinces Chambers, Victoria Square
LEEDS, 1

WILCO ELECTRONICS

"INEXPENSIVE TELEVISION." Revised and enlarged edition giving circuit of R1355 etc., also 45 m/c Pye strip 2/6. Post 3d.

45 Mc/s PYE STRIP. A ready-made vision receiver for London frequency. Complete with 6 EF50 valves and an EA50. 57/6, post & pkg., 1/6.

RECEIVER R.1355. As specified for "Inexpensive Television." In original packing, as new. Complete with all valves. 30/6, carriage 7/6.

EF50 VALVES. Red Sylvanian, or British guaranteed unused, ex-new equipment, 7/6, post 6d.

RESISTANCE MATS.—Make ideal heating mats for Aquariums, Photographic solutions, Print dryers, etc. Mains voltage. Black Heat, size 10in. x 6in. Price 2/6, post free.

SLOW MOTION DIAL with Vernier, 200-1 Reduction, front of panel mounting 6in. dia., calibrated 0-100. 5/6 each, post 1/-.

BATTERY CHARGER. Type 42A. Input 230 v. A.C. Output 6 or 12 v. 4 amps. In black crackle case with fuses, switch and meter. £5/5/-, carriage paid.

MOVING COIL METERS. 2½in. Flush. Rectifier type. Scaled 0/100 volts A.C. Resistance 100 K ohms. A very useful meter with a 1 Milliamp movement. 30/-, post free.

MICRO AMMETER. D.C. 100-0-100, 2½in. Flush, 40/-, post 1/6.

VALVE HOLDERS. Int. Oct. Bakelite 6d. ea. Ceramic, 1/3 ea. B9G Ceramic, 9d. ea. B9A. Laminated, 8d. ea. 3-pin Diode Laminated, 3d. ea. 3-pin cradle type, Polystrene, 8d. ea. B7G. Polystrene or Bakelite, 1/- ea. Ceramic mounted in pairs with screening cans, 5/6 per pair. Please add postage.

INERT CELLS. 1½ volts, size 2in. x 2in. x 5in. Just add water, last for years, ideal for Electric Bells, Telephones, Models, etc. Only 2/- each Post and packing 1/-. Or 4 for 10/- Post Free.

These are just a few of the items in our stocks. Send 6d. in stamps for comprehensive list giving full details of Potentiometers, Condensers, Resistors, Switches, etc., etc.

294 LOWER ADDISCOMBE RD., CROYDON

METALWORK, all types cabinets, chassis, racks, etc., to your own specifications.—PHILPOTT'S METAL WORKS, Ltd. (G4B1), Chapman St., Loughborough. [0026

FILM projectors, cine cameras, photographic equipment; catalogues 3d.—Diamond Films, 124, Oatlands Drive, Slough. [8981

DUPLICATING and typewriting. Any type of work undertaken with speed and accuracy; fees reasonable.—Tel. Ruislip 4125. [8966

NICKEL chrome wires, 20-50swg, ex stock, large or small quantities.—Doyle, 157, High Holborn, London, W.C.1. Chancery 4050. [8799

TANNOY speakers, 21/-; lens for B.T.H. 8RB projectors, 52/-; disc recorders, complete, many spares.—Little Ashington, North'd.

NEW 19in Post Office racks, 5ft 6in high, 7 channel sides, drilled every inch, wide feet, £5/10/- each.—Harris, The Huon, Bournemouth.

NUTS.—Buy from the actual makers; brass and steel; BA to 4BA lock and full.—Details from Kerka, Agincourt Rd., London, N.W.3. [8675

CINTEL Standard Electronic Counting Unit for batch total of 25, with counting head and light guides, complete, with all valves, never used, new condition, cost £110 in 1949; reasonable offer wanted.—Box 2329. [9042

TAYLOR instruments: sig. gen., valve tester, A.C.-D.C. tester, Viewmaster and tube, Williamson amp., Decca 2-speed unit, tone compensator, 12in speaker, many spares; offers.—16, Elm Way, Neasden, N.W.10. Evenings from 6.30 p.m. [7095

ALLSCREWS, Ltd., for B.A. screws, nuts, washers, studding, grub-screws, bolts, soldering tags, woodscrews, etc., plain or nickel or cadmium plated, one-gross packets or large quantities, stamp for lists.—270a, King St., Hammersmith, W.6. Riv. 7762. [0225

ENGRAVING, amateurs and trade could take the opportunity of engraving problems in the future by getting in touch with A.G. Engraving, 19a, Windmill Rd., London, S.W.18. Bat. 5783. Brass, bronze, ormoid Perspex dials; one knob or repetition equally retained. [0034

COPPER wires enamelled, tinned, Litz, cotton, silk covered, all gauges; B.A. screws, nuts, washers, soldering tags, eyelets, ebonite and laminated bakelite panels, tubes, coil formers, Tufnol rod, headphones, flexes, etc.; latest radio publications, full range available; list, s.a.e.; trade supplied.—Post Radio Supplies, 33, Bourne Gardens, London, E.4. [0158

SITUATIONS VACANT

The engagement of persons answering these advertisements must be made through the local office of the Ministry of Labour and National Service, etc., if the applicant is a man aged 18-64 or a woman aged 18-59 inclusive, unless he or she or the employer is excepted from the provisions of The Notification of Vacancies Order 1952.

SILVER CITY AIRWAYS.

A AND/OR B licensed radio engineers required, preferably with experience of some or all of the following: T.R.1154/55, A.D.7092, S.T.R.9, M.R.80, A.D.107-8.

APPLICATIONS to Manager, Silver City Airways, Binscombe Airport, Camberley, Surrey.

CROWN Agents for the Colonies.

WIRELESS station superintendent (temporary) required by the Gold Coast Government Posts and Telegraphs Department for two tours of 18 to 24 months in the first instance, commencing salary, according to qualifications and experience, in the consolidated scale £955 rising to £1,180 a year, with gratuity of £25 or £37/10 according to salary for each completed period of three months' service; outfit allowance £60; liberal leave on full salary; free passages; candidates must possess a Higher National Certificate in Electrical Engineering or equivalent, and have had practical experience in two or more of the following fields: V.H.F. link systems; H.F. communication network; frequency shift keying and teleprinter maintenance; V.H.F. and H.F. direction finding systems; aeronautical navigation aids (ground); manufacture of light engineering equipment.—Apply at once by letter, stating age, full names in block letters, and full particulars of qualifications and experience, and mentioning this paper, to the Crown Agents for the Colonies, 4, Millbank, London, S.W.1, quoting on letter M 29100/B. The Crown Agents cannot undertake to acknowledge all applications and will communicate only with applicants selected for further consideration. [8974

ELECTRONIC engineer required with experience in microwave technique and measurement; salary according to qualifications and experience.—Box 2258. [9015

EXPERIENCED Draughtsmen required in the following fields:
A. Carrier Telephony.
B. Electronic Instruments.
C. Radio Receivers and Transmitters (from 10kW down).
WRITE stating qualifications, experience and wages required to Mullard Equipment, Ltd., Brathway Rd., Wandsworth, S.W.18. [9030

EXPERIENCED radio television service engineer, good man, good salary, keen and thoroughly reliable, driving essential, permanent.
ELECTRICAL SERVICE (EDGWARE), Ltd., 117, Edgware Rd., W.2. Pad. 2342. [9025

JUNIOR Electronic Engineer reqd., London area; opportunity to acquire cinema equipment experience; salary according to experience. Box 2365. [9051

TWO vacancies exist for men with H.N.C. or equivalent to work in a small laboratory on frequency control systems; housing is available for successful applicants.—Write Box 2263.

THE
BRITISH NATIONAL
RADIO SCHOOL
ESTD. 1940

NOW IN OUR THIRTEENTH YEAR AND STILL

NO B.N.R.S. STUDENT HAS EVER FAILED

to pass his examination(s) after completing our appropriate study course.

Make DARK EVENINGS
Lead to BRIGHT DAYS
with a
B.N.R.S. Home Study Course

A.M.Brit.I.R.E. and
CITY and GUILDS Radio and
Telecommunications Exams, etc., etc.

Please mention this advert. and send for free booklet to —

STUDIES DIRECTOR
BRITISH NATIONAL RADIO SCHOOL
66, ADDISCOMBE ROAD, CROYDON

The House for Quick Delivery

The following Goods Ex-Stock. Cash with Order or C.O.D.

PLESSEY Multi-Speed Auto Record Changer. Price including Tax, £13/13/-.

BRADMATIC Model S Tape Desk, £41.

CHAPMAN 55 Quality Tuner, £23/2/0, including Tax

B.S.R. G.U.4 Three Speed Gramophone Unit. Price including Tax, £9/19/11.

CONNOISSEUR 2 Speed Motor, £22/18/6.

ACOS G.P. 20, complete with either Standard or L.P. Heads, £3/11/5.

ACOS Heads, Standard or L.P., £3/3/4.

GARRARD Standard Playing Unit with Pick-up, £6/3/2.

GARRARD Model No. RC 72A Auto 3 speed Changer, £16/6/6.

LEAK TL/12 Watt "Point One" Feedback Amplifier, £28/7/-.

LEAK RC/PA/U. Remote Control Pre-Amplifier, £9/9/-.

LEAK V.S. Superhet Tuner Unit complete with Valves, £37/2/4.

NON-RESONANT REFLEX CABINETS. Height 34in., Width 16½in., Depth 17½in. Dia. of aperture 10½in. Port. 9in. x 3in. Solid Oak Front, £8/8/-.

A. ERNEST BUCHAN

(M.O. Dept), 28 Belmont Street, Aberdeen. Phone 23579

SALVAGE RADIO-GRAM CHASSIS. Price £9/17/6. Write for details of valve line-up and chassis sizes without obligation. These 1952 all-wave receivers were made to sell at three times this price. Various models available, all tested and guaranteed. Autochange units also available.

TRANSFORMERS. Bargain salvage offer of Mains transformers. New resprayed, guaranteed for three months. Pri. 0-240, tapped 210, 115 v. Sec. 250-0-250 60 mA., L.T. 4.5 v., 2 A., L.T. 2.5 v. 1 A. Price 12/9 post 2/-. Also O.P. (salvage) unused. Will match nearly all normal O.P. valves with 2-5 ohm speech coils. Price 3/9. Post 1/-.

EXTENSION SPEAKERS. Brand new 5in. P.M. speaker mounted on latest type polished bezel, fitted with gold-sprayed metal fret. Supplied with 5ft. of lead. 25/9. P. and P. 1/9.

PERSONAL RECEIVERS. Price £5/19/6. 4 valve T.R.F. kit with complete instructions for assembly including point-to-point wiring schedule and choice of walnut brown or ivory plastic cabinet. Assembled ready for use, 35/- extra. This popular set can be built by any amateur with the minimum of set building experience, and is guaranteed to give complete satisfaction. Postage and packing 3/6 extra.

VALVES. We have a large stock of new valves. Send stamp for new valve list and 1952 catalogue of Radio Bargains.

C.W.O. or C.O.D. Money Back Guarantee.

DUKE & CO.,
621 ROMFORD ROAD, LONDON, E.12
GRA. 6677

BUILD OUR 7 STARRED ECONOMY SUPERHET

★ MODERN 5 VALVE PERFORMANCE
★ ONE, TWO OR 3-WAVEBAND VERSIONS
★ AC OR AC/DC
★ USES STANDARD COMPONENTS
★ EASY TO MAKE
★ COSTS LITTLE TO BUILD
★ NO PREVIOUS EXPERIENCE NECESSARY

CONSTRUCTIONAL DETAILS 1/- or given FREE with our

CONSTRUCTOR'S HANDBOOK

(Price 2/6 only)

THIS USEFUL BOOKLET ALSO CONTAINS

(a) Circuits of these sets
(1) 2-wave plus Gram. Superhet.
(2) Fixed Station T.R.F. Transportable.
(3) 2-wave plus Gram. T.R.F. Set.
(4) 3-wave Superhet Feeder Unit.
(5) 3-wave Superhet Feeder Unit with H.F. Stage and incorporating Gram. and Quality switching.
(6) 5 v. A.C. all-wave Superhet.
(7) 5 v. A.C./D.C. all-wave Superhet.
(8) Feeder Unit Amplifier and Power Pack.
(9) 6 v. A.C. all-wave Superhet.
(10) 6 v. A.C./D.C. all-wave Superhet.
(11) Signal Tracer.
(12) 4 v. Battery Superhet.
(13) 5-watt Amplifier.
(14) 10-watt Quality Amplifier

(b) Full constructional details of our very popular 2-wave plus gram. Superhet Coil Pack (extremely simple point-to-point wiring given in detail).

(c) Illustrations, Technical hints, Formulae, Resistance Colour Code, etc.

(d) Catalogue of our extensive Radio Stock forwarded with each Handbook.

(e) Monthly bargain list.

A HANDBOOK YOU CANNOT AFFORD TO BE WITHOUT.

It will save you pounds.

Send 2/6 **now** for your copy to —

SUPACOILS MAIL ORDER OFFICE
98, Greenway Ave., London, E.17

B. & H. RADIO
EAST STREET, DARLINGTON

ANTI-STATIC AERIAL
Easily fitted to chimney stack. Complete with coaxial and fittings £3 5 0

BASS & TREBLE SEPARATOR KITS
Mod. A. 6DB per octave £1 19 0
Mod. B. 12DB per octave £2 16 0

SCRATCH FILTER £1 5 0

VARIABLE SELECTIVITY I.F. TRANSFORMERS 465 K.C.S. per pair £1 7 6

9 K.C.S WHISTLE FILTER
Narrow trough better than 40DB down £2 12 6

INTERFERENCE SUPPRESSORS
Ex-Govt. but fitted 1,000 volt condensers 17 6

FERRANTI, Ltd., Moston, Manchester, have vacancies for:—
(1) Mechanical/electrical engineers of proved ability in the design and application of (a) gyroscopic instruments, (b) small electric servos and analogue computers.
CANDIDATES should be able to show proof of past achievement in these fields rather than high academic attainments.
SALARY in the range £1,000-£1,250 p.a.
(2) Mechanical/electrical engineers for development work on (a) and (b) above; preference will be given to candidates who can show evidence of practical achievement.
SALARY in the range of £750-£850 p.a.
THE company has a staff pensions scheme.
APPLICATION forms from Mr. R. J. Hebbert, Staff Manager, Ferranti, Ltd., Hollinwood, Lancs. [9013

RADIO and TV engineer, fully experienced R. man for service dept., must be able to take complete charge.—APPLY Elsmore's Radio, Ltd., 91, Mansel St., Swansea. Tel. 55122. [9018

FERRANTI, Ltd., Moston, Manchester, have the following vacancies for work in connection with the development of CATHODE RAY TUBES for Television, Oscillography and special purposes:—
(1) SENIOR engineers and scientists to take charge of research and development sections. Applicants should have a good degree in physics, electrical engineering or glass technology, and have had experience in supervising development work. Salary according to qualifications and experience, in the range £750 to £1,250 per annum. Please quote reference GCT/1.
(2) ENGINEERS and scientists for work in the following fields:—
Thermionic emission, vacuum techniques, electron optics, photo-electric phenomena, electronic circuits, glass technology and high-voltage techniques.
Qualifications include a good degree or equivalent. Previous experience would be an advantage, though not essential. Salary, according to qualifications and experience, in the range £450 to £1,000 per annum. Please quote reference GCT/2.
(3) MECHANICAL or production engineers to undertake the development of machinery for mass-production of electronic devices. Qualifications etc. as in (2). Please quote reference GCT/3.
(4) TECHNICAL assistants for experimental work in the fields listed in (2) above. Qualifications are a degree or Higher National Certificate. Salary range £400 to £600 per annum according to age and qualifications. Please quote reference GCT/4.
The Company has a Staff Pensions Scheme.
Application forms from Mr. R. J. Hebbert, Staff Manager, Ferranti, Ltd., Hollinwood, Lancs. Please quote appropriate reference. [9057

EXPERIENCED component engineers are urgently required by a large Midland firm for work of national importance.
APPLICANTS selected will be required to build up a new section specialising in selection and design of electrical and mechanical components for electronic equipment, together with associated light and medium heavy control gear, transformers and wiring; applicants should have a full working knowledge of service specifications and type approval procedure, experience of component design and an understanding of ratings.—Please write, giving full details of experience and qualifications and quoting reference I.H.P. to Box 2401. [9057

RADIO Testers and Technicians required, 5-day week, canteen.—Apply, The Dulci Co., Ltd., 97, Villiers Rd., Willesden, N.W.2. [9052

STOREKEEPER, man must have shorthand experience with all types instrument wire.—Purchester Electrical, 15-16, Gerrard St., W.1.

DESIGNERS required for factory test apparatus; experience in pulse techniques essential.—Apply Personnel Manager, K. Cole, Ltd. Ekco Works, Malmesbury, Wilts.

DRAUGHTSMEN.—Air Trainers, Ltd., require several senior and junior electrical and mechanical draughtsmen for work in connection with the development of flight simulators as follows:—
(a) ELECTRICAL Draughtsmen for design work on electronic servo amplifiers.
(b) MECHANICAL Draughtsmen for design work on simulated aircraft instruments and flight mechanisms.
SALARY scale: A.E.S.D., plus Merit for juniors. Up to £11/5 per week for seniors. Positions permanent. Pension Scheme. Five-day week. Applicants should reply, stating experience and qualifications, to:—
PERSONNEL Officer, Air Trainers, Ltd., Bicester Rd., Aylesbury, Bucks. [9012

WANTED, first-class television service engineer, wages £12 to £15 according to qualifications, plus commission; house provided.—Apply W. T. Baker, Electron Buildings, Aberkenfig, Glam. [7085

RADIO Mechanics skilled in workshop practice are required by Lancashire Aircraft Corporation, Ltd., (Skyways of London), at Bovington Airport, Herts.—Apply in writing to Personnel Manager. [7080

RADIO (Meteorological) Mechanics required by Meteorological Office. Qualifications:—Basic knowledge of radio and radar and experience in maintenance/operation of radar equipment including oscilloscopes. Successful applicants serve in U.K. and overseas. Commencing London wage £7/17/6 at age 25 or over, rising annually to £9/10/6; deduction of 5/- for each year below 25; overtime, night duty allowances, etc.; promotion prospects.—Apply to Borough Employment Exchange (Dept. WW), 236, Walworth Rd., London, S.E.17. [9041

ALEC Davis SUPPLIES Ltd

DEPT. W.W., 18 TOTTENHAM COURT ROAD LONDON, W.1. MUseum 6560 2462

A NEW Hi-Fi AMPLIFIER. Approx. 9 watt output. Push-pull 6V6s 15 db neg. feed back, freq. 30-18,000 c.p.s., ± 1 db = hum level, 80 db down at 6½ watts. Max. treble Boost 15 db at 10 kc/s., max. bass boost 15 db at 25 c.p.s. L.F. correction, provision radio feeder. Price £15.
This amplifier will be available as a complete easy to-build kit. Please S.A.E. for descriptive leaflet. A radio feeder will be available in the near future.

NEW PRINCIPAL QUALTAPE DECK. High Z Head, £16/16/-.

COLLARO TAPE DECK MOTORS. Left and right drive. Speed 1,400 R.P.M. Price 38/- each, plus 1/- post.

RECORDING TAPE. E.M.I.-Scotch Boy, 35/-, G.E.C. Type A, 30/-.

ROSETTE MICROPHONE. Crystal freq. 30-7,500 c.p.s. Type B110. Only 52/6, plus 1/6 post. "The above represents the finest value in microphones today."

BRANDENBURG E.H.T. UNITS. 6-9 Kv., 66/6, 15 Kv., £9/9/-. Coilcraft 30/-. Coilcomplete with U26 rect. 67/6, total.

ARMOUR PLATE GLASS. Size: 13 × 16½in., 3/6 plus 1/3 carriage.

REXINE COVERED RECORD PLAYER CASE. Takes MU14 motor and Decca p'up., 30/6, plus 3/6 carriage.

A.D.S. 4 W. QUALITY AMPLIFIER. Incorporating a pre-amplifier stage with bass boost. Also suitable for use with a radio feeder unit. Complete set of components for above amplifier including cabinet, £8/10/-. Complete amplifier constructed and fully tested, £9/17/6.

SPEAKERS. 3½in. Elac., 15/-; 5in. Elac., 15/-; 6½in. Plessey, 15/-; 8in. A.D.S., 17/6; 10in. Goodmans 27/6, plus 1/6. Goodmans Audiom 60, £8/12/6; Axiom 150 £16/5/6; Whatfedale W12, £9/5/-; Truvox 12in. BA11, 59/6, plus 1/6 post. "We keep a full range of Whatfedale Speakers."

NEW "DENCO" ALIGNMENT OSCILLATOR. D.A.O.I. This unit provides a modulated signal for the alignment of the I.F. Amplifiers, etc. The two standard frequencies of 465 Kc/s. and 1.6 Mc/s. are selected by the turn of a switch. Price £2/19/6, plus 1/- post.

METAL RECTIFIERS. RM2 125 v. 100 m/a., 5/6; RM1 125 v. 60 m/a., 5/-; plus 1/- post. Type 280 STC 90 v. 80 m/a., 7/6, plus 1/- post.

DENCO TYPE "O" TRF COILS. Medium and Long wave, reaction, 8/- pair, plus 9d. post.

VARIABLE CONDENSER. Midget 2-gang 500 pF, 7/6, with dustcover 10/6. Standard 7/6, 3-gang 7/6, all plus 9d. post.

GRAMOPHONE EQUIPMENT. B.S.R. 330-78 r.p.m. motor unit 79/7, plus 1/6 carr. B.S.R. 3-speed motor unit, £6/6/6, plus 1/6 carr. Collaro 3-speed Crystal Heads, £14/9/6. RC 330-78 Changer, £12/3/3. RC511, 3-speed changer, Crystal Heads, £18/16/-. Decca XMS pick-up, £7, plus 1/- post. Connoisseur STD, £4/11/8, plus 1/- post. S. Light Weight one Head, £6/9/-. Tone Head 71/8. Trans. Tone Pillar Pup., £4/3/2; Trans. 25/-; Chancery X'TAL P'up., 54/-; plus 1/- post. L.P. Insert 21/6; Collaro AC514 player unit MAG Head, £6/10/5, plus 2/- post. Garrard Heads, STD, 26/6, plus 1/- post, miniature 54/4, plus 1/- post. HUP, 59/11, plus 1/- post. Sapphire Needle all magnetic. Type A Adaptors 9/3; Decca XMS Heads 59/2, plus 1/- post (various Collaro Heads in stock). Acos GP20 71/4. GP19 Heads 48/10.

GARRARD AC6 speed controlled centre drive motor 12in. table, £5/10/-, plus 2/- post.

TRANSFORMERS. 6.3 v. 1.5 a., 7/6, plus 9d. post 4 v. 2 a., 7/6, plus 9d. post. 12 v. 1 a., 8/6, plus 9d. post. 6.3 v. 6 a., 19/6, plus 1/6 post. Williamson Output, 78/9. Choke, 27/6, plus 1/- post. 20 w. Multiratio O.P. Trans., 27/9. 30 w. Multiratio O.P. Trans., 29/6. 12 w. Multiratio O.P. Trans., 16/7, 18/9. Wharfedale W12 P.P. O.P. Trans., 26/-.

DOUGLAS MAINS TRANSFORMERS. 20 v. 3 a., tapped 10 and 4, 23/6. 20 v. 2 a. tapped 2, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24 volts, 23/6. 250-0-250 v. 60 m/a., 0, 4, 6.3 v. 3 a., 0, 4, 5 v. 2 a., 23/6. 350-0-350 v. 100 m/a., 0, 4, 6.3 v. 3 a., 0, 4, 5 v. 2 a., 27/6. 350-0-350 v. 80 m/a., 0, 4, 6.3 v. 4 a., 0, 4, 5 v. 2 a., 23/6. 350-0-350 v. 100 m/a., 0, 3 v. 3 a., 5 v. 2 a., 27/6.

E.M.I. 20 W. PUBLIC ADDRESS AMPLIFIERS. Brand new, KT66 output. All valves metered, £25. Few only.

CHOKES. 10 h. 150 m/a., 16/3, plus 1/3 post. CM3, 10 h. 60 m/a., 300Ω, 4/9, plus 1/- post. CM4, 10 h., 75 m/a., 150Ω, 4/9, plus 1/- post. 50 h. 30 m/a., 1,500Ω, 6/6, plus 1/- post. 50 h. 20 m/a., 1,100Ω, 6/6 plus 1/- post. 20 h. 50 m/a., 6/6, plus 1/- post. 20 h. 10 m/a., 5/6, plus 1/- post.

FULL MAIL ORDER FACILITIES

(Please Add Postage)

Shop Hours, Monday to Friday, 9 — 5.30 p.m. Saturdays, 1 p.m.

NEW S.T.C. & "WESTINGHOUSE" SELENIUM RECTIFIERS.

Largest L.T. range in Great Britain. Current products. NOT SURPLUS. E.H.T. N2.100, 19/6; for W.W. TELEVISOR, for VR97, N2.50, 13/10; post 6d.

OCTOBER'S PRICE LIST

HALF WAVE HEAVY DUTY 7/in. SQUARE COOLING FINS. 16 v. 5 a., 30/-; 10 a., 33/6; 16 a., 41/-; 30 v. 5 a., 48/-; 8 a., 54/-; 48 v. 2.5 a., 35/6; 5 a., 64/-; 8 a., 75/-; all post 1/2.

BRIDGE CONNECTED FULL WAVE. 17 v. 1.2 a., 16/4; 1.6 a., 26/-; 2.5 a., 29/-; 3 a., 30/-; 4 a., 34/6; 5 a., 37/6; all post free. 33 v. 0.7 a., 24/3; 1 a., 28/-; 1.5 a., 45/-; 2 a., 51/-; 3 a., 52/-; 4 a., 62/-; 5 a., 67/-; all post 1/-. 54 v. 1 a., 38/6; 1.5 a., 62/-; 2 a., 69/-; 3 a., 70/-; 5 a., 93/-; 72 v. 1.5 a., 78/-; 2 a., 81/-; 3 a., 82/-; 5 a., 122/-; 100 v. 1.5 a., 112/-; 2 a., 128/-; 5 a., 174/-; all post 1/2.

BRIDGE CONNECTED HEAVY DUTY 7/in. SQUARE COOLING FINS. 17 v. 6 a., 49/6; 10 a., 56/-; post 1/6.

BRIDGE CONNECTED HEAVY DUTY Funnel Cooled, also **7/in. SQUARE COOLING FINS.** Revised price, same both types. 17 v. 12 a., 102/-; 20 a., 118/-; 30 a., 164/-; 50 a., £12.15/-; 33 v. 6 a., 91/-; 10 a., 104/-; 12 a., 108/-; 20 a., 138/-; 54 v. 6 a., 120/-; 10 a., 142/-; 72 v. 6 a., 154/-; 10 a., 178/-; 100 v. 6 a., £11; 10 a., £12.15/-; all post 1/10.

"WESTALITE" SELENIUM

12-15 v. D.C., 1.2 a., 15/9; 2.5 a., 27/8; 5 a., 31/9; 10 a., 54/6; 20 a., 99/6; 24 v. 1.2 a., 15/9; 2.5 a., 27/8; 5 a., 51/-; 10 a., 92/7; 20 a., 176/2; 36 v. 1.2 a., 27/8; 2.5 a., 51/-; 5 a., 69/1; 10 a., 130/9; post extra.

Wholesale & Retail

T. W. PEARCE (Est. 20 Yrs.)

66 GREAT PERCY STREET, LONDON, W.C.1

Off Pentonville Rd. 8 mins. King's Cross and Angel.

SAMSONS SURPLUS STORES

BRAND NEW R100A 6-VALVE RECEIVERS with 10in. P.M. speaker, for 100-250 v. A.C. or 6 v. D.C. Frequency range 1.7 Mc/s to 7.3 Mc/s. Output is matched for L.S. phones. Complete with Instruction Manual. £10.10/-, carr. 5/-.

AMERICAN LIGHTWEIGHT HEADPHONES, type H.S. with low resistance. New in maker's cartons. 10/6, post and packing 1/-.

HEAVY DUTY TRANSFORMERS. Prim. 230 v., sec. 12 v. 15 a. 32/6, carr. 5/-. Prim. 200-240 v., sec. 6 v. 15 a. 25/-, carr. 5/-. Prim. 200-240 v., sec. 10 v. 15 a. 32/6, carr. 5/-. Prim. 200-240 v., sec. 9 v. 4 a. CT. 10 v. 2.5 a., carr. 5/-.

ALKALINE CELLS. 7/10 ah. size 0in. × 2½in. × 2½in. 12/6. F. & F. 1.2 v. 12 ah., size 2in. × 6½in. × 11in. Banks of 3 cells 19/6. F. & F. 4½v. Single cells 7/6. F. & F. 1/-.

MASTER VOLTMETERS. 0-20 v. A.C., 50 cy. Moving iron 3in. mirrored scale, by Metro-Vick. 27/6, carr. 2/-.

HEAVY DUTY SLIDING RESISTANCES. 50 ohm, 1.5 amp. gear-driven, 45/-, carr. 2/6. 0.4 ohm, 5 amp. 17/6, carr. 1/6. 1 ohm 12 amp. 12/6, carr. 1/6. 50 ohm 1 amp. 10/6, carr. 1/6.

169-171 Edgware Road
London, W.2. Tel. PAD. 7851
125 Tottenham Court Road, W.1
Tel. EUS. 4982

All orders and enquiries to our Edgware Road branch, please. Open all day Saturday at the Edgware Road Branch.

E. K. COLE, Ltd. (Malmesbury Division), invite applications from electronic engineers for permanent posts in development laboratories engaged on long-term projects involving the following techniques:—
1. PULSE Deflection and Transmission.
2. SERVO Mechanism.
3. CENTIMETRIC and V.H.F. Systems.
4. VIDEO and Feedback Amplifiers.
5. V.H.F. Transmission and Reception.
6. ELECTRONICS as applied to Atomic Physics.
THERE are vacancies in the Senior Engineer, Engineers and Junior Grades. Candidates should have had at least 3 years' industrial experience in the above types of work, together with educational qualifications equivalent to A.M.I.E.E. examination standard. Commencing salary and status will be commensurate with qualifications and experience. Excellent opportunities for advancement are offered with entry into a pension scheme after a period of service.
Forms of application may be obtained from Personnel Manager, Ekco Works, Malmesbury, Wilts. [9018

ELECTRONIC Design Draughtsman for growing firm of industrial electronic control manufacturers; ground floor job for enthusiast with experience.—Electrix, Ltd., Wilbury Way, Hitchin, Herts. Hitchin 1598. [9055

FERRANTI LIMITED, Manchester, have staff vacancies in connection with long-term development work on an important radio telecontrol project at their new laboratories at Wythenshawe, South Manchester.
(I) SENIOR Engineers or Scientists to take charge of research and development sections. Qualifications include a good degree in Physics or Electrical Engineering, Mathematics, or equivalent qualifications. Previous experience in charge of development work. Salary according to qualifications and experience in the range of £1,000-£1,600 per annum. Please quote reference WS.
(II) ENGINEERS and Scientists for research and development work in the following fields: Radar, radio and electronic circuits, microwaves, high power centimetric valves, vacuum and/or high voltage techniques, servo control and electro-mechanical devices. Qualifications include a good degree in Physics or Electrical Engineering, Mathematics, or equivalent qualifications. Previous experience in an advantage but is not essential. Salary according to qualifications and experience in the range £500-£1,000 per annum. Please quote ref. WE.
(III) TECHNICAL Assistants for experimental work in the fields listed in (II) above.
Qualifications required: a degree or Higher National Certificate in Electrical or Mechanical Engineering or qualifications. Salary in the range of £400-£600, according to age and experience. Please quote reference WT.
(IV) DESIGNERS and Draughtsmen.
Section leaders, leading draughtsmen, draughtsmen and junior draughtsmen, preferably with experience in any of the fields mentioned above. Salaries based on A.E.S.D. rates; in the range £350-£650 per annum with good allowances for special qualifications and experience. Please quote reference WD.
THE Company has a Staff Pension Scheme. Application forms from Mr. R. J. Hebbert, Staff Manager, Ferranti, Ltd., Hollinwood, Lancs. Please quote appropriate reference. [8535

TECHNICAL and Research Processes, Ltd., require a Designer-Draughtsman with precision mechanical and electronic experience for interesting development projects.—Write fully, 25, Bickerton Rd., Upper Holloway, N.19. [9046

TELEVISION and radio designers required by well-known U.S. concern, excellent opportunity for qualified engineers who desire to emigrate; initial interview in England after sending full particulars and qualifications to—Box 2450. [9065

D. NAPIER & SON, Ltd., Luton Airport, Beds., require electronics laboratory assistant, familiar with C.R.O. practice, keen on development of new techniques for experimental work on aero engine development and allied projects.
APPLICATIONS stating age, experience and salary required should be made to the local Employment Exchange. [9856

MURPHY Radio, Ltd., have vacancies for designer-draughtsmen in their electronics division; a varied programme ensures opportunity of widening experience with excellent prospects.—Apply giving particulars of training and experience to Personnel Manager, Murphy Radio, Ltd., Welwyn Garden City, Herts.

RADIO service engineer or good-class radio wireman required by old-established firm in London area; permanent job.—Apply to E.M.G. Hand-Made Gramophones, Ltd., 56-58, Rochester Place, London, N.W.1. (Gulliver 5256. [9097

SOUND recording studio, London area; vacancy for assistant recordist, must have thorough electronic knowledge and maintenance experience; 5-day week.—Write Box 2365, stating age, experience, qualifications and salary required. [9047

TELEVISION and radio engineers required for service department, able to drive service van, permanent positions with good working conditions, discount on store purchases.—Write or call Staff Controller, Bentalls of Kingston. [9014

BELLING & LEE, Ltd., Cambridge Arterial Rd., Enfield, Middlesex, require research assistants in connection with work on electronic components, fuses, interference suppressors and television aerials; applicants must be graduates of the I.E.E., or possess equivalent qualifications together with similar laboratory experience, salary will be commensurate with previous experience; 5-day week, contributory pension scheme.—Applications must be detailed and concise, and will be treated as confidential. [9230

"AUTOMAT" HOME CHARGERS, CHARGER KITS, SELENIUM RECTIFIERS

New Goods with Full Guarantee

"AUTOMAT" HEAVY-DUTY HOME CHARGER, virtually unbreakable, selenium rectification, 12 months' guarantee, fine workmanship and appearance, for a.c. mains, 8/6. Model 6v. 1½v. 2-amp. output, 50/6, post 2/-, or 3-amp. model 12 v. only, 72/-, post 2/-. **ELIMINATOR KIT.** Transformer, seleniums 8/6, and 4/6 rectifiers, 12 plus 12 m/fds. cond. for 120 v. 20-30 m/a. eliminator with 4 amp. trickle charge, 35/-, or with handsome steel case, 45/-, post 1/3.

FOOLPROOF CHARGER KITS, genuinely trouble free and ultra reliable with components of ample size. Standard kit, 12 v. 2 amp, selenium rectifier, 42 watt transformer, ballast/indicator bulb for 2 v., 6 v., 12 v. charger, no rheostat or ammeter needed, 38/6, post 1/9, or with handsome steel case, 52/-, post 2/-. Ditto but 4 amp rect. and 60 watt trans., 7/6 extra. Junior 6 v. kit 6 v. 2 amp, 33/6, case 12/6 extra. Minor kit 6 v. 12 v. 0.5 amps., trans., rect., ballast bulb, 22/6, post 1/4. 12 v. 1 amp. rect. and trans. for 12 v. train sets, 20/6, post 1/4.
Heavy duty slider type charger kit, 120 watt trans., 12 v. 6 amp. large finned type rect., slider resistance high grade ammeter for 6 v./12 v. charger, £4.15/-. Carr. 2/6, wt. 10lb.

SELENIUM RECTIFIERS. New stock, not surplus. 12-15 v. 2 amp., 15/6. 6 v. 2 amp., 9/-, post 8d., 12 v. 3 amp./3.4 amp., 16/6, post 9d. 6 v. 4 amp., 16/6. 24 v. 2.5 amp., 32/6. 24 v. 3 amp., 35/6, also 3a and 8a types up to 80 v. 12/15 v. 3 amp., 27/6, gian finned type 12 v. 6 amp., 42/-, post 1/6. Trickle charge types 2 v./6 v. 0.5 amp., 4/10. 12 v. ½ amp. h. wave, 6/-, ditto 1.3a. push pull, 7/6, post 6d.

SMALL SPACE H.T. RECTIFIERS, 250 v. 100 m/a. bridge 14/6, p. 8d. Ditto 200 m/a., 22/6, ditto 300 m/a. 34/-, 150 v. 30 m/a. eliminator type 6/6, p. 6d.

"RENEWBAT," battery desulphator and condit-oner 1/9, post 3d. Car size, 3/-, post 4d.

CHAMPION PRODUCTS
63 Uplands Way, LONDON, N.21. Phone LAB 4487

BRASS, COPPER, DURAL, ALUMINIUM, BRONZE

ROD, BAR, SHEET, TUBE, STRIP, WIRE
3,000 STANDARD STOCK SIZES

No Quantity too Small *List on application*

H. ROLLET & Co., Ltd.
6 Chesham Place, S.W.1. *SLOane* 3463
ALSO AT
LIVERPOOL BIRMINGHAM MANCHESTER

100 kcs. QUARTZ CRYSTAL UNIT *Type* Q5/100

for Secondary Frequency Standards

★ Accuracy better than 0.01%. ★ Temperature coefficient 2 parts in a million per degree Centigrade temperature change. ★ Gold electrodes applied by cathodic sputtering direct to the faces of the crystal, giving permanence of calibration. ★ Simple single valve circuit gives strong harmonics at 100 kcs. intervals up to 20 Mcs. ★ Octal based mount of compact dimensions. PRICE 45/- *Post Free*

Full details of the Q5/100 including circuit are contained in our leaflet Q1. Send stamp to-day for your copy.

THE QUARTZ CRYSTAL Co. Ltd.
63-71 Kingston Road,
NEW MALDEN, SURREY
Telephone: MALden 0334

L·R·S

Est. 1925

FOR

PROMPT & EFFICIENT SERVICE

CASH or EASY TERMS

The following goods are available from stock.

NEW EASY TERMS

LEAK

(See Maker's Advert. page 95)

TL/12 'POINT ONE' AMPLIFIER
Cash **£38.7.0**

'VARI-SLOPE' PRE-AMPLIFIER
Cash **£12.12.0**

For the two units: Deposit £9.0.0 with order and 18 monthly instalments of 40/-. Passenger carriage 10/- extra payable with deposit.

14 FREE SHAVES

WITH THE NEW

SUPER REMINGTON

CONTOUR 6 ELECTRIC SHAVER

will convince you that this remarkable new shaver really does give a better, more pleasant and far quicker shave than *any* other method.



OUR 14 DAYS' FREE TRIAL

is available on receipt of **20/- deposit** (returnable if not entirely satisfactory), with eight monthly instalments of 20/-. Cash **£8.19.6**. A.C./D.C. 200/250v

Other voltages available. Each shaver is BRAND NEW and despatched in superb silk lined presentation case.

The L.R. SUPPLY CO. LTD.

(LONDON RADIO SUPPLY CO.)

BALCOMBE - - SUSSEX

Telephone: Balcombe 254

15 GNS. Ex Works

REFLEX CABINETS

Send for descriptive leaflet of this heavily built corner cabinet —size 37in. high and 29in. wide—ideal for best results with Goodmans, Wharfedale, etc. 12in. loudspeakers. Fully lined and beautifully finished in any shade of walnut, oak or mahogany. Early delivery. Rectangular and 10in. x 15in. models to order.

THE CHAFFEY CABINET CO.

50A CHELTENHAM ROAD, LONDON, S.E.15

Telephone: Orpington 3559

AN electronic engineer with development experience required to control small test department engaged on testing and calibrating all types of electronic test equipment; please write stating age, experience, and salary required to—Box 2092. [9002

SERVICE engineer required with at least 10 years' experience in the maintenance of electronic equipment; knowledge of radar equipment, etc. an advantage.—Apply to Personnel Department (BS/H), E.M.I., Ltd., Blyth Rd., Hayes, Middlesex. [9027

FOREMAN/Supervisor with experience of batch and individual production; able to control labour; write in first instance giving full details of positions held.—The Trix Electrical Co., Ltd., 1-5, Maple Place, Tottenham Court Rd., London, W.1. [8990

DRAUGHTSMEN required; must have sound experience in radio, television or electronic design. North London area; knowledge of Government Dept. practice desirable; special opportunities and pay in excess of accepted minima.—Write Box 1895. [8964

EXPERIENCED radio testers and inspectors required for production of communication and radio apparatus; also instrument makers, wirers and assemblers for factory test apparatus.—Apply Personnel Manager, K. K. Cole, Ltd., Elco Works, Malmesbury, Wilts. [9025

SENIOR electronic engineer required, experience of helicopter instrumentation and analogue computors would be an advantage.—Apply stating experience, age, etc., to the Personnel Officer, Saunders-Roe, Ltd., Southampton Airport, Eastleigh, Hants. [8951

EXPERIENCED radio service engineer with some television experience required; first-class rates and excellent working conditions.—Write, stating age, qualifications, experience and salary required, to British Relay Wireless, Ltd., Services Department, 397, Albany Rd., S.E.5.

TECHNICAL assistants experienced in dealing with electronic measurement and instrumentation, required for work on aero engines and their application; candidates aged between 25 and 50, possessing degree or diploma and willing to deal with problems during flight preferred.
APPLICATIONS stating age, qualifications, and details of experience should be addressed to the Divisional Personnel Manager, the Bristol Aeroplane Co., Ltd., Engine Division, Filton House, Bristol. [8818

ELECTRONIC engineer urgently required by manufacturers of industrial electronic equipment; applicants should have sound technical qualifications and have had some years of development work; good salary and scope to suitable energetic man; write with full details to—Box 2057. [8991

PHILIPS Balham Works, 45, Nightingale Lane, Balham, S.W.12, require young electronic engineer having minimum qualification Higher National Certificate, for development of electro-medical and radiation instruments; permanent appointment; write, stating age, training, experience and salary required. [9034

EXPERIENCED draughtsman/checker required, aged 45 years upwards, to check contract drawings for production, and index existing library; knowledge of line communication and G.P.O. work desirable.—Please write, quoting reference KO, to Box 2152, stating experience and salary required. [9005

TRANSFORMER designer for domestic and Services electronic equipment; substantial experience on transformer design essential; must be fully alive to modern techniques and methods; salary according to experience; monthly staff grade; age up to 42 years; London area.—Write fullest particulars to Box No. 2521. [7004

TECHNICAL assistants required for the development laboratory of a prominent engineering company in Northern Ireland; applicants should have served an apprenticeship, possess Higher National Certificate or equivalent, and have had good practical experience of one or more of the following:—
(a) ELECTRONICS, radar or television.
(b) light electrical equipment.
(c) Precision mechanical or hydraulic apparatus.
REPLY, stating age, experience and qualifications, to:—
TA.2, Box 1978. [8975

GUIDED weapons development offers good opportunities for senior and junior electronic, electrical, radio and mechanical engineers and draughtsmen, aerodynamicists, technical authors, and computers (female); also for skilled and semi-skilled fitters, electronic wiremen, toolmakers and machine tool operators.
APPLY, quoting reference S.P. and giving particulars, qualifications and experience, the Employment Manager, Vickers-Armstrongs, Ltd. (Aircraft Section), Weybridge, Surrey. [8976

LARGE valve manufacturing company requires for its service department in the Southern London department in the Southern London area an assistant equipment maintenance engineer for the maintenance of valve and cathode ray tube test boards, and a new projection television service engineer for the servicing of projection units; write giving full details to—Box 2095. [8994

A WELL-KNOWN company engaged on guided weapon work has a vacancy for a chief inspector; the successful candidate will be required to control an inspection staff covering electrical, mechanical and electronic equipment; candidates must British born, between the ages of 35 and 40 and should preferably have had some experience of working with government inspectorates; the salary paid will be in accordance with age and experience and will not be less than £750; the post is permanent and pensionable and offers good prospects for the right man.—Apply to Box 2456, quoting reference S.P.

BARKER SOUND UNITS

•

NEW PRICES

DIRECTLY TO YOU

•

Barker Sound Units are now sold directly to users only for cash or on hire purchase.

This change in policy is regretted, but is forced on us by the imposition of purchase tax and our determination to keep our selling prices reasonable.

As with all crafts which seek to make something outstanding, of lasting value to those who look for and enjoy the best, our costs are set by the skill, care and experience which must be paid for. The thousands of people enjoying Barker Natural Sound all over the World prove that this is well worth while.

Our new basic prices are well down, so that even with P.T. the cost to you is very fair. As we write we still await the final P.T. figures, but when you read this we shall have them.

Please write NOW for details

BARKER NATURAL REPRODUCERS

3, Newman Yard, London, W.1.

Cabinets

To *YOUR* specification. Send 9d. for illustrated catalogue.

Components

We hold extensive stocks of radio and television components.

Gram. Motors

All the latest Auto-changers and Pick-ups available.

Amplifiers

Send for details of our latest models.

Speakers

All sizes and types available. We stock the full GOODMANS range.

Television

All the VIEWMASTER parts are stocked.

Send 6d. for complete and latest lists.

LEWIS RADIO CO.

All correspondence to : **(Dept. 1052), 322, High Road, Wood Green London, N.22.**

Callers to : **120, Green Lanes, Palmers Green, London, N.13. (Near Bowes Road)**

Phone : BOWes Park 6064.

14 Day (& Electric) Automatic Switches

Reconditioned. Guaranteed one year, for controlling Window & Poultry lighting, heating, etc.

From **35/-** EACH

Write for illustrated lists

DONOHOE'S (Timers), 6, GEORGE ST., NORTH SHIELDS, NORTHUMBERLAND.

WANTED

1st Class W/T Operators

There is an urgent call for W/T Operators to fill hundreds of vacancies in the Marine, Land and Air Services.

Why not bring your present w.p.m. in Morse Code up to the required standard of 20-30 w.p.m. Expert operating is *the* important factor.

If you can consistently send and receive at 15 w.p.m., the Candler Advanced Code Course will enable you to apply for a good, well paid position.

Send now for the CANDLER "BOOK OF FACTS". Sent Free on receipt of a postcard request.

NOTE: There is also a Special Course for passing the Morse Code test for an Amateur Licence.

Write to Dept. W/T/W

THE CANDLER SYSTEM CO.,

52b, ABINGDON ROAD, LONDON, W.8.

Candler System Company, Denver, Colorado, U.S.A.

ADDITIONAL senior and junior engineers and required by a small but progressive firm of electronic instrument manufacturers in Surrey for interesting development work on important projects; applicants should possess a degree in physics, and should have industrial experience and a practical mind; both salary and prospects will be good for the right men.—Apply Box 2252. [0224

GLOSTER AIRCRAFT CO., LTD., at Hucclecote, Glos., have vacancies for electrical draughtsmen; previous aircraft experience an advantage but not essential; prospects are excellent for energetic and sound applicants.—Applications to be addressed to the Chief Designer, giving particulars of experience, age and salary required. [0226

VACANCIES exist in the design and inspection depts. of a well-known firm in East Anglia manufacturing scientific instruments of an electronic character; applicants should have had similar experience with an electronics firm and have good electrical and mechanical background, combined with an ability to organize projects and control labour.

WRITE in first instance, stating qualifications, details of past and present employment, and indicating salary required, to Box 2027. [8965

TELEVISION Service Engineer required for large retail concern in Manchester area, must be able to drive, house available if required; good conditions, permanency with pension scheme for suitable application; also radio mechanics, able to drive, for further training as TV service engineers.—Write, giving full particulars, to Box 2527. [9057

INTERNATIONAL AERADIO LIMITED require development engineer for engineering dept., Bovingdon, Herts; must be experienced in all aspects of design and testing of aircraft aerial systems; pension fund; canteen facilities; five-day week; single accommodation may be available.—Please apply quoting DEB to Personnel Officer, 40, Park St., W.1. [9092

SYDNEY S. BIRD & SONS, Ltd., require an experienced engineer for work in connection with the development and production of television components; experience in the R.F. field is particularly important.—Write, stating previous experience and salary required, to the Managing Director, Cyldon Works, Cambridge Arterial Road, Enfield, Middlesex. [9054

INSTRUMENT engineers required for the development of control systems for aircraft; candidates must be British born, between the ages of 25 and 35, and be capable of carrying out development of electronic or electro-mechanical systems on their own initiative; pension scheme in force; salary range £550-£750.—Apply Box 2455, quoting ref. A.A. [9069

R.F. engineer required for South West London area to take charge of waveguide development laboratory; applicants must have experience of the development of X-band waveguide components up to and including full production drawings; applicants should state full details of qualifications and experience, age and salary required.—Ref. ME. Box 1921. [8971

DESIGNERS and draughtsmen for aircraft electrical installation work; applicants should be experienced in wiring layouts, design of electrical junction boxes and switch gear, etc.; previous aircraft experience not essential.—Apply in writing, stating experience, age and salary required, to Chief Draughtsman, the de Havilland Aircraft Co. Ltd., Hatfield, Herts. [8452

EXPERIENCED high-class electronic fitter wiremen required for research and development work at The English Electric Co., Stafford, ex-H.M. Forces personnel with experience of radio and radar considered; good working conditions, canteen facilities, non-contributory life insurance and pension schemes, eligibility according to rules; hostel accommodation available.

APPLY quoting Stafford M. of L. Order No. 56 to Ministry of Labour and National Service Office, Stafford, or any M. of L. Office. [8858

EXPERIENCED men (ex-service radar mechanics preferred) are required for duties in the electronics division of Saunders-Roe, Ltd.; applicants should be capable of intelligent assembly and wiring of a wide variety of electronic apparatus from circuit diagrams.—Write, giving details of experience, age etc., to the Personnel Officer, Saunders-Roe, Ltd., East Cowes, Isle of Wight. [8928

DEVELOPMENT engineers required for development laboratory of light engineering factory in Stockport, must have experience in circuit design for radio, test gear and electronic instruments; HNC, City and Guild's (Telecommunications) or degree essential; staff appointments, 5-day (5½ hour) week; canteen facilities. WRITE stating age and full details of experience and qualifications. Box 1191. [8796

ELECTRONIC and mechanical engineer with experience 16mm sound on film projectors, tape recorders, etc., required by progressive West of England photographic and cine dealers; successful applicant will be required for varied servicing duties and film production (maybe until); clean driving licence essential.—Applications, with brief summary of experience and indicating salary required, to Box 2402. [9059

DECCA RADAR intend during the next few months to fill a few senior posts with research and development engineers of sound training and extensive experience; this is an opportunity for men with more than average ability and initiative to secure appointments which offer excellent remuneration, advanced work of vital importance and the very definite opportunity to obtain a key position in this young but soundly established company.—Those who wish to discuss the matter further should write in confidence to the Research Director, Decca Radar, Ltd., 2, Tolworth Rise, Surbiton, Surrey. [8977

ODDIE FASTENERS

PAT. 507249



THE FASTENER WITH ENDLESS APPLICATIONS—SIMPLE—POSITIVE SELF-LOCKING. MADE IN A VARIETY OF TYPES AND SIZES.

SPECIAL FASTENERS TO SUIT CUSTOMERS REQUIREMENTS.

WIDELY USED IN THE RADIO INDUSTRY.

Illustrated brochures and other information will be gladly sent on request.

DEPT. "W.W."

Oddie, Bradbury & Cull Ltd., Southampton

Tel.: 55883 Cables: Fasteners, Southampton

TRANSFORMERS

FOR ALL PURPOSES

SINGLY OR IN QUANTITIES FROM OUR STANDARD RANGE OR TO YOUR SPECIFICATIONS

GOOD DELIVERIES REASONABLE PRICES

We have also a department for rewinds giving you a 24-hour service and a better job. Please label all burnt-outs with your name and address when despatching.

P. HOWORTH

51 POLLARD LANE · BRADFORD

Tel.: 37030

THE NEW PARALEX

Adjustable Hole (Fly) Cutter

British Made

- Perfect Rigidity
- Case Hardened & black finished
- Selected by Council of the Industrial Design.

Hexagon safety setscrews
Vernier adjustment; one full turn of the knurled knob moves the cutter 1 16"rad.
½" High Speed Tungsten toolbit with shaped cutting edge ready for use
LOCKING SCREWS (hexagon safety setscrews)

No.	Capacity	Shank Diameter	Price each
PLX	¼—6½"	¼" parallel	21/-
PLM	¼—6½"	MORSE TAPER No. 2	27/-
PL	¼—4"	⅜" or ½" parallel	16/-

LUDFRY LTD. **189 Wardour St., London, W.1** **Tele: GERrard 2291, 7085**

NUSOUND PRODUCTS

136 WARDOUR STREET
LONDON, W.1
(Oxford Street End)
Tel.: GERrard 8845

NUSOUND FIDELITY-TEN. The latest super quality Amplifier. All Triode line up. P-Pull PX4 output. Frequency response 20-25 kcs ± .6 d.b. and continuing up to 50 kcs. ± .9 d.b. Sensitivity 120 mv for max. 10 w. output. Total harmonic distortion .1 per cent. at 1,000 c.p.s. at 6 watts. 20 d.b. neg. feedback. Independent Treble and Bass controls. Chassis size : 14 x 9 x 7½in. high. A.C. model only. **£26.**

A NEW FEEDER UNIT. This is our latest addition to our range, and employs a s hot c.c.t. with two L.F. stages and variable selectivity controls giving bandwidths of 7-10 and 14 kcs. The unit covers the medium-long and short wavebands and has a large illuminated dial. Price 17 gns. inc.

RETAIL TRADE ENQ. ON ABOVE ITEMS.

NUSOUND QUALITY AMPLIFIERS.
8½-WATT OUTPUT—PP 6V6—independent bass and treble boost and cut—switch for L.P. records—neg. feedback—provision for radio feeder unit—freq. response 25 to 20,000 c.p.s. ± ½ d.b.—hum 80 d.b. down at 6.5 watts—feedback 14 d.b.—sensitivity .05 volt. Price only **£15.17.6.** Also available with remote control unit. Price **£17.10.-.**

NUSOUND REFLEX CABINETS.—For Wharfedale speakers—10in., **£9.9.-**; 12in. **£10.10.-**. Veneered polish finish mahogany, oak or walnut. Sandfilled Corner Baffle suitable for Wharfedale 8in. and 10in. Loudspeaker Units. Price **£9.19.6.**

L.P. Records by return of post service.

Our other products inc. 4½ watt Amp.—A.C. Model **£11.10.-**; A.C./D.C. **£12**; T.R.F. Preset Feeder, 3 station, **£7.12.6**; 3 station Preset S.Het. **£8.10.-**; two-band variably tuned S.Het. **£11.5.-**.

Remote control pre-amp. Unit, inc. tone controls, **£5.7.6.**

New Feeder for Wrotham, **£7.19.6.**

2-Watt quality Amplifier, **£6.19.6.**

GRAMOPHONE EQUIPMENT.
Decca 33 or 78 r.p.m. motor, **£3.14.4**, inc. Connoisseur Pups. Stnd. L.weight, **£4.11.8.** Trans. 13/-. Super L.weight, one head, **£6.9.-**. LP Head **71/8.** Trans. **15/-**. Fibre Pup **£4.3.2.** Trans. **25/-**. Two-speed Stroboscope, **1/-**. Garrard Heads : Standard **25.3.** Miniature **50.11.** HiFi **56/-**. Type A Adaptor **8.1.** Decca Mag. Heads **$9.2.** Decca XMS P.up **£7.** complete. Chancery Attachment, **72.6.** Decca 3-speed motor **£6.8.6.** Connoisseur 2-speed motor **£22.18.8.** Chancery Xtal P.up (LP20 insert) **53/-**. Spare insert, LP **31/6.** Garrard AC6 motor, speed controlled, 12in. table **£6.15.10.** Colaro A.C. 514MB motor and P.up **£6.10.5.** BSR Deck, 3-speed motor, auto-stop, Decca XMS P.up **£13.18.8.** BSR Monarch Auto-Changer **£17.17/-.**

E.H.T. GENERATOR. 6-9 kv. **£6.6/-.** E.H.T. Coil **39/-.**

Descriptive leaflets 6d. plus postage.

We operate the personal export scheme.

GRAMOPHONE Amplifiers



£4.3.6
post and packing 2/6

Specially made for fitting into all gramophones and record players. Dimensions 10" x 3" x 2½". 4 watts quality output. Suitable with all pick-up and speakers. Valves 6J7 and 6V6 extra if required

Send for details *Trade Supplied*

ELECTRO-ACOUSTIC LABS.
TAIN · ROSS-SHIRE · SCOTLAND

THE General Post Office has vacancies for radio operators at its coast radio stations and applications are invited from men between 21 and 55 years of age who hold the Postmaster General's First-Class Certificate of Proficiency in Radiotelegraphy; selected candidates will be considered later for permanent, pensionable posts.—Application should be made to any local office of the Ministry of Labour and National Service, quoting Order No. City 4728. [9056

DEVELOPMENT engineers, International Aeradio, Ltd., specialists in equipment design for aviation service, due to expansion of development section at Bovingdon Airport near Watford, require junior and senior radio and telegraph engineers. Salary according to experience, single quarters provided, pension scheme, 5-day week, canteen facilities.—Please apply through Local Labour Exchange to Personnel Officer, 40, Park St., London, W.1.

GRADUATE physicists and engineers are required at the G.E.C. Stanmore Laboratories for work concerned with (a) electronic circuitry, (b) electronic simulators, and (c) magnetic amplifiers or small power electric motors; experience in one of these fields will be an advantage.—Apply to the Staff Manager (Ref. GBLC/S 582), Research Laboratories of The General Electric Co., Ltd., Wembley, Middlesex, stating age, qualifications and experience.

VACANCIES exist for senior and junior electronic engineers on work in connection with the electronic measurement of physical variables and associated problems; this consolidation and expansion of a young department offers scope for men with enterprise and ability.—Applications, stating age, full details of qualifications, experience and salary required, should be addressed to the Personnel Officer, Saunders-Roe, Ltd., East Cowes, I.o.W. [9057

COMPETENT television and radio service engineers required by service organisation of leading manufacturer particularly in South Wales, North Birmingham, Nottingham, Leeds, Glasgow and Dundee; payment by salary, bonus, allowances, commission and expenses; light van provided and maintained; test apparatus and tools provided.—Apply in writing, General Manager, Home Maintenance Dept., Ltd., Langley Park, Slough, Bucks. Interviews locally for selected applicants. [9004

WAYNE KERR require several engineers for design and development work on electronic equipment; the development programme is varied and ranges from S band oscillators and Q meters to H.F. signal generators; salaries for these posts are up to £1,000-£650 depending on qualifications and experience; there are also some vacancies for technical assistants to work on the same programme.—Write to The Wayne Kerr Laboratories, Ltd., Sycamore Grove, New Malden, Surrey. [8989

AN experienced graduate is required by the General Electric Co., Ltd., for work at their Stanmore Laboratories in the responsible work concerned with the development of specialised test equipment for airborne radar; an original approach to the problem is necessary and a knowledge of microwave techniques or circuit design is essential.—Apply to the Staff Manager (Ref. GBLC/S/5104), G.E.C. Research Laboratories, Wembley, Middlesex, stating age, qualifications and experience. [8966

JUNIOR electrical engineer, well versed in fundamental theory, required by the English Electric Company, Ltd., Luton, to work in a new department on specialised equipment employing new techniques; previous experience unnecessary, but initiative, ability to improvise and adaptability most important; salary according to qualifications.—Please write, giving full details and quoting reference "English Electric 615," to Westminster Employment Exchange, 8, Chadwick St., London, S.W.1. [9012

EXPERIMENTAL Electrical Engineer, B.Sc., preferably physicist with electronic experience, capable of carrying out on his own initative and to a satisfactory conclusion, development work in connection with electrical discharge phenomena applicable to manufacturing processes, well-paid permanent position with first-class company, Northwest London area, offered to suitable applicant; write giving personal details, qualifications, age, experience and salary required to—Box 2295. [9031

ENGLISH ELECTRIC Co. Ltd., Luton, have a vacancy for an electronics engineer with drawing office experience for liaison between laboratory and drawing office; Higher National Certificate or equivalent an advantage, but not essential; salary according to experience and qualifications in the range of £500 to £650 with good prospects.—Please write, giving full details and quoting reference 906A, to Central Personnel Services, The English Electric Co., Ltd., 24-30, Gillingham St., London, S.W.1. [9055

MINISTRY OF SUPPLY have vacancies at Research Establishment near Sevenoaks, Kent, in following fields : (1) electronic circuit design; (2) trials of experimental equipment; (3) development of electro-mechanical devices; (4) measurement of transient phenomena on electrical and explosive equipments; (5) development work on electrical components; (6) maintenance of laboratory electronic instruments; candidates must possess Higher School Certificate (Science), or equivalent Higher qualifications in physics or electrical engineering may be an advantage; salary within inclusive ranges £597-£754 for experimental officer (minimum age 26) and £264 (age 18)—£595 for assistant E.O.; rates for women somewhat lower; posts unestablished.—Application forms from Ministry of Labour and National Service, Technical and Scientific Register (K), Almack House, 26, King St., London, S.W.1, quoting D.365/52/A. Closing date 11 November, 1952. [9093

GEE RADIO

METAL RECTIFIERS

Volts	Amps		Price
110	½	F.Wave	27/6
50	½	,,	19/6
24	10	,,	£4 0 0
24	6	,,	35/-
24	2½	,,	25/-
24	1	,,	13/6
12	2	,,	13/6
12	6	,,	25/-
12	4	,,	18/6
12	2½	,,	16/6
12	1	,,	7/6
6	1	,,	7/6
RM1-125 v.	60 m.a.	H/Wave	4/6
RM2-125 v.	80 m.a.	,,	5/-
RM3-125 v.	100 m.a.	,,	6/-
RM4-250 v	250 m.a.	,,	18/6
Meter Rec	5 m/a.	F.Wave	7/6
K3/100 —	35 EHT 100		14/0
K3/50 -4 kv	1 m/a.		8/6
K3/45 -3.6 kv.	1 m/a.		8/2
K3/40 -3.2 kv.	1 m/a.		7/6
K3/25 -2000 v	1 m/a.		5/6
K3/160-5.6 kv.	1 m/a		21/6

R1155 RECEIVER. Brand new, in perfect condition in original transit case. Each instrument tested under correct working condition before despatch, **£9/19/6.** Suitable power unit with built-in output stage, **£3/10/0.** Carriage : R1155, 10/-; Power unit, 7/6.

BELL & HOWELL 16 mm. MASTER MODEL SOUND PROJECTOR. Complete, in perfect order, ready to use. One only **£90.**

LANE TAPE TABLE MK2. The latest type with 3 motors, 200/250 v. A.C., 50 cycles. Price **£16/10/0** carriage paid. Leaflets on application.

MAGNETIC RECORDING TAPES. Emitape, type H60 and 65A, 1,200ft. at **35/-**; Scotch Boy, type MCI-111, 1,200ft. at **35/-**; G.E.C., type "A," 1,200ft., at **30/-**; spare spools, **4/-**; E.M.I. coating compound, **4/6** per bottle.

ALUMINIUM SHEET. Undrilled 16 S.W.G. Sizes available : 12in. x 12in., 24in. x 17in., 24in. x 24in., 24in. x 36in. **5/-** sq. foot.

VARIABLE VOLTAGE REGULATOR TRANSFORMER. Input 230 A.C. at 21 amps. Output 57.5 in 16 equal steps to 230 v. at 21 amps. Ex-Govt. In perfect order. **£15.**

ROTARY CONVERTER. 12 v. D.C. input to 230 v. A.C. 50 cycles output. Approx. 150 watts. Complete in wooden carrying case, containing voltage control, sliding resistor, mains switch, input and output sockets. Ex-Govt. In perfect order **£9**, carriage paid.

SPEAKERS AT PRE-PURCHASE TAX PRICES :

10in. P.M. 3 ohms, Plessey		20/-
8in. ,, ,,		14/6
6½in. ,, ,,		14/6
5in. ,, Goodmans		12/6

METERS :

2½in. round flush mounting,	0-500 m/a.
,, ,, ,, ,,	0-300 m/a.
,, ,, ,, ,,	0-200 m/a.
,, ,, ,, ,,	0-100 m/a.
,, ,, ,, ,,	0-30 m/a.
,, ,, ,, ,,	0-10 m/a.

All brand new, perfect condition, **12/6** each 4in. Round Surface mounting, 0-500 m/a. D.C., **45/-**.

5in. Round Surface mounting, 0-300 v. A.C., 50 cycles, **50/-**.

VARIAC TRANSFORMER. 180-0-180 v. 7+7 amps. 500 cycles. Perfect order. **£5.**

VALVES :

SPECIAL PURPOSE RECEIVING AND TRANSMITTING. 813, 829B, 807, 6L6 metal, 35T, 1625, CV173, VR91, VU39. These are only a few of the hundreds of different types available from stock. Full list of types and prices available on application.

Terms : C.W.O., C.O.D. or pro-forma. Orders under 20/- plus 1/6 for p.p.; unless otherwise stated. Special quotation for overseas buyers.

15 LITTLE NEWPORT ST., LONDON, W.C.2
GERrard 6794/1453

"Always a good deal" at
WEST END RADIO LTD.

MINIATURE RELAYS. Dims. 1½ x ¾ x 1in. 4 pole CH. over. Resistance 250 ohms. 9/6 each. Ideal for models. Weight 1 oz.

BATTERY CHARGER KITS. 12 volts 4 amps., or 6 volts 4 amps. Consisting of trans. selenium metal rec. pilot lamp, switch. In handsome metal cabinet finished black crackle. 8in. x 6in. x 6in. complete 59/6.

DESK TYPE RECORD PLAYER CABINETS. In solid oak. Dims.: 16in. x 15½in. x 8½in. Lift-off front. 39/6 each, carr. 5/-.

TV CABINETS. New design console in walnut. 33in. x 16in. x 20in. Will take up to 12in. tube. £7.15.0, carr. 12/6.

COMMUNICATION RECEIVERS. THE FAMOUS CR100/2 EX-NAVY COMMUNICATION RECEIVER. 11 valves, crystal control, built in power pack. 200-250 volts A.C., 6 bands, etc., etc. £29.10.0. As new.

RADIO CORPORATION OF AMERICA. Model AR 77E. Immaculate condition with full guarantee. £45. Send 6d. for illustrations. ALSO IN STOCK: R1155, AEWI, Hallicrafters, etc. R1155P pack and O.P. stage with tone control. £4.15.0.

WEST END RADIO LTD.
14, LISLE ST., LEICESTER SQUARE, LONDON, W.C.2. Phone: GER. 7341
Open all day Saturday. No lists at present.

Quixo RADIO Cell Tester

Accurate tests
High, Low and Grid
Bias Batteries.
Write for leaflet 30M

RUNBAKEN MANCHESTER 1

LABORATORY TEST EQUIPMENT

We undertake the repair and recalibration of all types of high-grade Laboratory Equipment and are contractors to both British and Foreign Govt. Departments. In certain cases we are able to undertake the design and development of specialised equipment, or will build to specification.

DUN ELECTRONICS
17 Victoria Gdns. London, W.11 Phone Park 6636

VOLUME CONTROLS—Midget type. All values, long spindles, guaranteed 1 year. Less sw., 3/-; S.P.sw., 4/-; D.P. sw., 4/9.
80 OHM COAXIAL CABLE. Standard ¼in. diam. Polythene insulated. Not exploded. 10d. per yard.
RESISTORS. All Values. ½ w., 4d.; 1 w., 6d.; 1 w., 8d.; 2 w., 1/-.
WIRE-WOUND RESISTORS.—Best maker. Miniature Ceramic Type.—3 w., 15 ohm to 8 K., 1/9; 10 w., 20 ohm to 6 K., 2/3; 15 w., 20 ohm to 10 K., 2/9; 25 w. Vitreous, 10 K. to 25 K., 3/-.
All items P. and P. 6d. extra. £1 orders post free.
T. R. S. **307 WHITEHORSE ROAD, WEST CROYDON.** THO 1665

THE REPAIRERS of ELECTRICAL INSTRUMENTS

All kinds of Meters, Volt, Amp., Galvo., Recording, Electric Clocks, Aircraft Instruments repaired. We are also skilled Horologists.
Government Ministry enquiries invited.

Ask for Estimate. Send your enquiries to
Mr. J. R. W. Ridgway, F.B.H.I.
J. R. RIDGWAY & CO.
341 City Rd., E.C.1, Phone: TERminus 0041

APPLICATIONS are invited for a post with a company engaged in airborne geophysical surveying; applicants should have a good knowledge of radio and electronics equipment, and be prepared to go abroad on flying operations; previous flying experience an asset.—Apply Box 5826. [9056

TECHNICAL assistant required for cathode ray tube production; applicants must have had previous experience in a technical capacity on valve development or production; vacancy offers excellent prospects—Apply in first instance by letter only, to Personnel Department, LJB/8.5, E.M.I. Factories, Ltd., Hayes, Middlesex. [9026

WAYNE KERR require several draughtsmen for design and development work on high priority electronic test equipment. The work is interesting and offers considerable scope for men with initiative and design ability. Attractive salaries in excess of the revised A.E.S.D. rates will be offered to suitable applicants.—Write, giving details of past experience, to The Wayne Kerr Laboratories, Ltd., Sycamore Grove, New Malden, Surrey. [9096

AN excellent opportunity exists in a new section for a first-rate engineer, thoroughly experienced in the development and design of high power radar modulators; this is a permanent position, carrying a substantial salary and superannuation facilities; the post calls particularly for a man with initiative and energy; applications quoting reference 921 D from suitably qualified men will be welcomed by—Central Personnel Services, English Electric Co., Ltd., 24-30, Gillingham St., London, S.W.1.

TEST equipment, electronic.—Required by progressive company in S.W. London area, a keen engineer for design and maintenance of test equipment. Must have at least 5 years' experience in this class of work, be able to work on own initiative, and control staff. Type of apparatus will be confined to the testing of electronic components such as R.F. coils, capacitors, resistors, valves, A.F. and power transformers, also electronic sub-assemblies.—Please apply in writing to Personnel Officer, Decca Radar, Ltd., Shannon Corner, Kingston-by-Pass, New Malden, Surrey, giving full particulars of experience and state salary required. [9095

ENGLISH ELECTRIC COMPANY, Ltd., Luton, invite applications for permanent posts in a department developing and engineering in a wide variety of specialised electronic circuits; previous experience in such work would be an asset and, for one vacancy, experience in optics or oscillography would be a recommendation. Salaries will be in accordance with qualifications and experience, up to £625 per annum; the laboratories are new and pleasantly situated.—Please write, giving full details and quoting reference 1002, to Central Personnel Services, English Electric Co., Ltd., 24-30, Gillingham St., London, S.W.1. [8834

AMBASSADOR Radio & Television require an electronic engineer for laboratory research and development work; applicants must have had reasonable experience in electronic research and development, they should be graduates in physics, telecommunications or electrical engineering, or hold the Higher National Certificate of City and Guilds final in radio subjects; progressive positions are offered to men who can prove their ability; commencing salary in accordance with qualifications and experience; applications must be made in writing in the first instance, intimating availability for interview at—Princess Works, Brighouse, Yorkshire. [8845

EXPERIENCED electronic engineer required by the English Electric Company, Limited, Luton, for investigation into the nature of mechanical vibrations in connection with guided missiles project; post of responsibility in a new department is available for a well qualified man; adaptability and ability to develop electronic measuring techniques required, H.N.C. or equivalent and some experience of vibration work essential; salary according to qualifications.—Please write, giving full details of qualifications and experience and quoting reference 850 C/P, to Central Personnel Services, English Electric Company, Ltd., 24-30, Gillingham St., London, S.W.1. [8828

THE General Electric Co., Ltd. Brown's Lane, Coventry, require for work on guided weapons and like projects development engineers, senior development engineers, mechanical and electronic, for their development laboratories; fields include microwave and pulse applications; salary range £400-£1,250 per annum; vacancies also exist for specialist engineers in component design, valve applications, electro-mechanical devices and small mechanisms; the company's laboratories provide excellent working conditions with social and welfare facilities, superannuation scheme, assistance with housing in special cases; apply by letter stating age and experience to—The Personnel Manager (Ref. CRC). [9019

DEPARTMENT OF SCIENTIFIC AND INDUSTRIAL RESEARCH. Applications are invited for an unestablished experimental officer post in the Radio Research Organisation at Teddington, Middlesex for abstracting scientific and technical articles on radio research and development; candidates should possess a Higher National Certificate or equivalent qualifications and have a considerable knowledge and experience of some branch of radio research or development; the ability to read technical French and German would be useful but not essential; the salary range for men is at present £625-£750; candidates should be at least 26 and preferably under 31 but older candidates are not excluded.—Further information from Ministry of Labour and National Service Technical and Scientific Register (K), Almack House, 26, King St., London, S.W.1. Quoting ref. D 268/52A. [8998

By Request
A
THREE WAVEBAND COIL PACK
S. M. L.
WITH
H. F. STAGE

- Size 5¼" × 3¼" × 1¾"
- All metal chassis. Fully screened stages.
- Four position Switch. Separate gram wafer.
- Aligned and tested.
- Boxed with circuit.
- Colour coded connections

Price 60/-

OLYMPIC RADIO COMPONENTS
224 Hornsey Road, Holloway, N.7
Phone: NORth 2914

DEALERS!
Have you seen our adverts. of bargains in "The TRADER" and "RADIO ELECTRICAL TRADING"
J. TOUBKIN
FARADAY HOUSE, TODD ST. MANCHESTER
Est. nearly 50 years BLA. 9348/9 *Authorised* B.V.A. Distributors

LOCKWOOD
makers of
Fine Cabinets
and woodwork of every description for the Radio and allied trades
LOCKWOOD & COMPANY
Lowlands Rd., Harrow, Middlesex. Byron 3704

RELAYS try KAYES.
We Build them at competitive prices.
UNIVERSAL ENGINEERING CO.
(Subsidiary)
11, ST. ANNS ROAD, HARROW, Middlesex.
Telephone: HARrow 1432.

CRYSTALS
Type "G"

Frequency ranges: 100kc/s to 500 kc/s; 3 mc/s to 20 mc/s. Evacuated glass envelope having B7G valve base, with crystal connected across pins Nos. 3 and 7.

of world repute
BROOKES CRYSTALS LTD.
10, Blackwall St., Greenwich, London, S.E.10.
Phone: GREenwich 1828. Cables: Xtals London. Grams: Xtals Green London.

SOLONS FOR ESSENTIAL JOBS!

Use SOLONS for the jobs that matter—this modern precision tool makes soldering speedier, simpler and more reliable. 5 models: 65 watt with oval tapered and round pencil bit; 125 watt with oval tapered and round pencil bit; 240 watt with oval tapered bit; each with 6 feet 3-core Henley flexible. Voltage ranges from 100 to 250.

W. T. HENLEY'S TELEGRAPH WORKS CO. LTD., 51-53 Hatton Garden, London, E.C.1

HENLEY SOLON REGD. TRADE MARK SOLDERING IRONS

FOR INDUSTRIAL USE

Write for Folder Y.10.

A REMARKABLE ACHIEVEMENT IN FILTER DESIGN

Pat. Applied For

E.M.G. STEEP-CUTTING INFINITELY VARIABLE FILTER

- Cuts at any selected frequency between 4,000 and 8,000 c.p.s.
- Average steepness of cut 30 db. per octave.
- Connects between secondary of output transformer and speaker (15 ohms, rated impedance).
- Specially valuable for use with new microgroove records.
- Greatly reduces needle-hiss on ordinary records with minimum high note loss, and suppresses high pitched interference on radio.
- No distortion, and no appreciable loss of volume.
- Leaflet available from the manufacturers.

Novel circuit, patents pending.

£4 - 10 - 0

Trade Enquiries Invited

E.M.G. HANDMADE GRAMOPHONES LTD

Newman St., Oxford St., W.1

Telephone: Museum 9971-2-3

B.B.C. requires a limited number of technical assistants aged 21 or over in operations and maintenance department for service at transmitter, studio, recording and television centres throughout the United Kingdom; knowledge of mathematics, electricity and magnetism to School Certificate standard; experience in electrical or radio engineering an advantage. Salary £360 p.a. with annual increments to £470 p.a. maximum; promotion prospects.—Application forms from Engineering Establishment Officer, Broadcasting House, London, W.1 (enclosing addressed foolscap envelope). After completion forms to be sent to B.B.C., c/o Ministry of Labour, 211, Marylebone Rd., London, N.W.1, marking envelope "T.A.11."

JUNIOR development engineers are required to assist in development of precision electronic laboratory instruments; successful applicants will be engaged on interesting long-term projects concerned with the development of a wide range of equipment; the appointments are of a permanent nature. They carry considerable technical responsibility and offer scope for the exercise of individual initiative. Applicants should have had previous practical experience of development, preferably in the instrument field; theoretical qualifications ranging from O.N.C. (or an equivalent standard) to a University degree in communications engineering or physics are acceptable; salaries are in the range of £350-£650 p.a. and are dependent upon age, qualifications and experience.—Applications should be made to Personnel Manager, Furzehill Laboratories, Ltd., Boreham Wood, Herts.

HIVAC, Ltd., the rapidly expanding Electronics Division of Automatic Telephone & Electric Co., Ltd. will shortly open new premises at Ruislip, Middlesex, with excellent modern facilities for the development and manufacture of miniature and sub-miniature valves, cold cathode tubes and other electronic devices. APPLICATIONS are invited from Engineers, Physicists and Chemists with previous experience in the valve industry or in precision engineering for posts in the Development and Production Departments which occur as a result of this expansion. The appointments, a number of which will be for senior positions, will all be pensionable, offer splendid opportunities for advancement, and good salaries. Preference will be given to applicants with a University Degree in Physics, Engineering or Chemistry, or who are members of an appropriate professional body.

APPLICATIONS, stating age, full details of qualifications and experience, together with an indication of salary expected, should be addressed to The Managing Director, Hivac, Ltd., Greenhill Crescent, Harrow-on-the-Hill, Middx.

B.B.C. requires Engineer in studio equipment section of planning and installation department in London. Appointment will be in salary grade £795-£1,065. Duties include specification, ordering and testing of equipment used for transmission of films for television and for making films from television; planning complete installations including such equipment; liaison with manufacturers and supervision of contracts. Requirements include considerable practical experience in use of high-grade cinematographic equipment and thorough knowledge of principles of its design and of associated techniques relating to lenses, film stock, film processing, etc.; good knowledge of principles of television, and preferably some experience of application of films for television purposes. A degree in electrical engineering, physics, or equivalent qualification desirable.—Applications to Engineering Establishment Officer, B.B.C., London, W.1, giving details of qualifications and experience, within 7 days. [6045

IMPERIAL Smelting Corporation, Ltd., has a vacancy for a research assistant in the instrument section of its research department to assist with the plant work carried out in this section; duties are mainly connected with measurement surveys, conducted on any plant in the group, construction of experimental models or equipment in the laboratory, the compilation of data and the assessments of results and the maintenance and routine inspection of laboratory equipment; minimum requirements for the post are 21 years of age and a National Certificate in Electrical or Mechanical Engineering, together with three years' experience of general instrument practice; candidates slightly older possessing Higher National Certificate with plant experience would be preferred; in all cases the commencing salary will depend on individual qualifications and experience.—Applications in the first place to Ministry of Labour & National Service, Avonmouth, addressed to the Personnel Manager, Imperial Smelting Corpn., Ltd., quoting reference INS/WW. [6978

MINISTRY OF SUPPLY requires experimental officer in Radio Department, Royal Aircraft Establishment, Farnborough, Hants, for experimental design of aircraft aerials for modern high speed aircraft; thorough knowledge of properties of aerials, transmission line filters and matching units, with practical experience of measuring techniques and aerial development in V.H.F. wave band essential; knowledge of aircraft constructional materials and techniques, as far as these affect aerial design, is also required; candidates should have Higher School Cert. (science) or equivalent, but possession of higher qualifications in physics or engineering may be an advantage; salary according to qualifications and experience within inclusive range £597-£754 p.a. (min. age 26); rates for women somewhat lower; post unestablished.—Application forms from Ministry of Labour and National Service, Technical and Scientific Register (K), Almack House, 26, King St., London, S.W.1, quoting D.552/52A. Closing date 10th October, 1952. [6056

A WINDOW WORTH LOOKING INTO

Television Coil Formers. With iron dust cores. Polystrene, 1in × 4in, with single hole fixing, 6 BA, 6d. each, 5/6 per dozen.

Special Offer. Callers only. 50 only, Ex-W.D. 230 volt Input A.C. Mains transformers. Output 500 × C × 500 volt @ 170 mA, 4 volt 3 amp filament, don't miss this wonderful offer, 22/6 each.

Aerial Coupling Units range 4.2—7.5 Megs, complete with 0-350 thermo amp meter, 7/6 each.

Television. Diode Holders, 3d. each; Cradle type, 6d. each; Ditto, Polystrene, 8d. each.

Television. Wire-Wound Pots 10k, 20k, 25k, 50k, all at 2/- each.

Television Dural Aerial Masts. Telescopic from 15in—7ft 6in. long, ideal for making your own Television Aerial, 4/6 each.

Micro-Amp Meters, Brand New and Boxed 0-100 2½in. scale, 39/6 each.

Special Offer. Condensers 16 × 16 × 16 Mfd 450 working, brand new, 2/6 each.

Micro Switches. Several types available. Large stocks, please let us have your enquiries.

1000 P.F. Midget Moulded Mica Condensers, wire ends, 6d. each.

Bendix Command. 12/14-volt input plug-in type Rotary Transformers, output 250 volts 60 mA. Very limited number only, 29/6 each.

19in. Canadian Racks, totally enclosed, Top, Bottom, Sides and Back, all of which are removable, limited number only available 39/6 each, plus carriage 10/-.

Rotary Convertors, 24 volt D.C. input, output 230 volt A.C. mains @ 100 watts 92/6 each. Ditto 12 volt 102/6 each.

Welding Transformers. Input 230 volt A.C. Output 13/16 volt 65/75 amps, 82/6 each. Carriage 7/6.

Midget Wire-Wound Volume Controls. 20ohm centre tapped, ½in. diameter, ¼in. spindle, large number available, 2/- each.

Smoothing Chokes Heavy Duty, Ex-W.D. 15 Henrys, 275 mA resistance, 125 ohms 5in. × 5in. × 6in., 19/6 each.

4 Mfd. Mansbridge condensers 2,000 volt brand new ex W.D. 10/6 each. Many other types available, let us have your enquiries.

Soil Heating Transformers. Input 230 volt A.C., output 4 volt 20 amps, Ex-W.D., 45/- each.

E.H.T. Transformers Ex-W.D. Input volt 230 volt 50 cycle, output 2,400 volt 5 mA, 4 volt 2 amp, limited number only 29/6 each.

R.1355's. Brand new, sealed boxes, complete with all valves, 39/6, carriage 7/6.

Ex-W.D. Chargers. 200/250 volts A.C. input, output 22 volts 10 amps, £12/10/- each.

Microamp Meters, 0-50, 2in round limited number, only 42/6 each.

Special Offer. 32 mfd 450 volt Condensers, tubular, metal cased, special price 1/- each, to callers only or by post 6 for 7/6, post paid.

Stenelco Wire and Cable Jointers. 200/250 volt A.C. Ideal for Wiremen and Servicemen, offered at a fraction of their cost. Limited number only, 22/6 each.

Don't forget your postage

Open all day Saturday

G. W. SMITH & CO.

(RADIO) LTD.

3 LISLE STREET, LONDON, W.C.2

Telephone: GERrard 8204/9155

—TUNERS—

One Type 84 is the ideal Quality Tuner for your high-quality amplifier. This four-stage Super-Het Unit has a lively performance with very low distortion. Fitted variable selectivity (6 kc. and 10 kc.). Wave band coverage 16-50m., 190-550m., 800-2,000m. Using latest Mullard valves EC91 (2), EF41, EBF89, 6J7 & 6 v. tax paid.



Type 84 with R.F. stage also available.

Manufacturers of Ventex Products

C. T. CHAPMAN (Reproducers) LTD.
RILEY WKS., RILEY ST., CHELSEA, S.W.10
FLAxman 4577/8

Demonstration at **Webb's Radio**, London.

Distributors for S. Wales :—
Snell & Haines, Ltd., 132, Western St., Swansea.

RESISTORS

(mail order only)

Wide range of all types available
Send S.A.E. for detailed list.

D. ROGERS
30 Lewisham Road, London, S.E.13

DID YOU COUNT THE CORNER SPEAKERS AT THE SHOW THIS YEAR?

VOIGT

In 1934, ours was perhaps the only one, certainly the ONLY FULL SIZE ONE.

Voigt Designs Lead The Way

Enquiries and orders to head-quarters please.

VOIGT PATENTS LTD.
Sydenham, S.E.26. SYD 6666

INSTRUMENT TEST METERS. Suitable radio test, three ranges : 0-3 volt, 0-60 milliamps, 0-3,000 ohms new 20/-, post 1/-. Meters, R.F., 0-1 amp., 3/6, post 9d. R.F. 0-5 amp. 7/6, post 1/-. Attenuators, 7/6, post 1/3. Oxygen Flow Meters, 2/-, post 7d. Relays, Telephones, Siemens H.S. Relays, twin 37 ohm coils, new 10/6 each. Mains Suppressors R.A.F. 5/-, post 1/3. L.R. Phones 7/6, post 9d. Send S.A.E. for list.

L. C. NORTHALL
16 Holly Road, Quinton, Birmingham, 32
Phone: WOO 5146

SPECIALISED REPAIR SERVICE

WEBB'S Radio

specialise in the repair and alignment of complex communication receivers

All makes of English and American communication receivers completely overhauled to satisfy makers' original test specification. Calibration over entire coverage of tuning range. We issue a test report giving sensitivity—selectivity—signal/noise ratio on I.F.s., and sensitivity—image ratio—signal/noise—A.V.C. characteristics overall.

Recognised Service Agents for EDDYSTONE, R.C.A., HALLICRAFTER, etc

WEBB'S RADIO
14 Soho Street, London, W.1. Gerrard 2089

MINISTRY OF SUPPLY require experimental officers in research and development establishments; most posts concern guided weapons and require knowledge and experience of electronics; minimum qualification H.N.C. (science) or equivalent but higher qualifications in physics or electrical engineering an advantage; salaries according to age, experience, etc., within inclusive ranges: experimental officer (min. age 26), £597–£754; assistant experimental officer, £264 (age 18)–£555; somewhat lower for women; posts unestablished.—Application forms from M.L. & N.S. Technical and Scientific Register (K), Almack House, 26, King St., London, S.W.1, quoting A253/52/A. Return within 14 days. [9061

ELECTRICAL engineers are required for interesting and varied work in the Nelson Research Laboratories, English Electrical Co., Ltd., Stafford; applicants should have sound workshop and some drawing office experience and will be required to control the engineering of electronic, H.F., heating or vacuum equipment beyond the laboratory stage and therefore should have had experience in one or more of these fields; these posts offer ample scope for advancement to men with initiative and ability; salary according to qualifications and experience comparable with present-day levels.—Please write, quoting reference 1016 and giving full details, to Central Personnel Services, English Electric Co., Ltd., 24-30, Gillingham St., London, S.W.1.

SITUATIONS WANTED

WIDE experience in marine radio, radar and cinema, position required manufacturer shipping, or vice versa; excellent technical qualifications; references.—Box 2498.

INTELL, young man, 23, O.V.C. City & Guilds Radio Telec., 2 & 5, 4 years experience in radio and television and development work; regs. per. progressive position.—Box 2564.

P.O. radio/radar mech. desires progressive post from May, preferably in or around North London area; experienced servicing, aligning, testing usual equipment, including V. H/F gear, Marconi type S.W.B. transmitters, little experience S.S.B., freq. shift gear, teleprinters, etc.—Box 2262. [9021

BUSINESSES FOR SALE AND WANTED

RADIO Repair and Hire Business for sale; profits £750; stock, goodwill, and 100 hire sets out to good clients, £1,500; modern furnished 8-roomed house, garage, workshop, large garden, £3,500 freehold; offers invited.—Trotter, 186, Stoke Rd., Slough, Bucks. [8996

PAINTS, CELLULOSE, ETC.

PAINT spraying handbook 5/6, post free; cellulose and synthetic paints and all spraying requisites supplied; catalogue free.—Leonard Brooks, 55, Harold Wood, Romford. [0207

PATENTS

PATENT No. 622922 for "Improvements in Electrical Connecting Means of the Plug and Socket Type." Owners desire to meet all demands for the utilization of this Patent and invite enquiries from manufacturers and others in Great Britain prepared to assist in its commercial exploitation. Address in first instance Messrs. Pollak, Mercer & Tench, Chartered Patent Agents 154, Cheapside, London, E.C.2.

TECHNICAL TRAINING

CITY & Guilds (Electrical, etc.) on "no pass no fee" terms; over 95% successes; for full details of modern courses in all branches of electrical technology send for our 144-page handbook—free and post free.—B.I.E.T. Dept. 388A), 17, Stratford Place, London, W.1. [0117

INDUSTRY needs trained men; send for free brochure giving details of our Home Study Courses in radio, television and all branches of electronics we prepare students for the A.M.Brit.I.R.E., City and Guilds Telecommunications, R.T.E.B. and other professional examinations. Train with the college backed by Britain's largest electronic industry.—Write to E.M.I. Institutes, Postal Division, Dept. W.W.5, 43, Grove Park Rd., London, W.4, Chiswick 4417 (Associated with H.M.V.). [0179

TUITION

WIRELESS Telegraphy — Merchant Navy offers to youths 15½ upwards when qualified lucrative positions as radio officers.—Apply British School of Telegraphy, Ltd., 179, Clapham Rd., London, S.W.9. Also postal courses in theory of wireless for P.M.G. Certificates and Amateur Transmitting Licence. [0124

RADIO training.—P.M.G. exams and I.E.E. (A) Diploma; prospectus free.—Technical College, Hull. [0111

WIRELESS operating; attendance and postal courses.—Stamp for reply to Manager, The Wireless School, Manor Gdns., London, N.7.

A.M.I.Mech.E., A.M.Brit.I.R.E., City and Guilds, etc., on "no pass—no fee" terms; over 95% success in these exams. and courses in all branches of engineering, building, etc., write for 144-page handbook—free.—B.I.E.T. (Dept. 387B), 17, Stratford Place, W.1.

SEE the world; radio officers urgently required; we train most in shortest period; training fees payable after appointments secured; scholarships available; boarders accepted; 2d stamp for prospectus from Britain's leading college.—Wireless College, Colwyn Bay. [0018

THE Institute of Practical Radio Engineers have available home study courses in every phase of radio and television engineering, specialising in the practical training of apprentices in the retail trade; enrolments limited, fees moderate.—The Syllabus of Instructional Text may be obtained post free from the Secretary, I.P.R.E., Fairfield House, 20, Fairfield Rd., Crouch End, London, N.8. [0088

G.E.C. GERMANIUM CRYSTAL DIODES

Midget Size, 5/16in. x 3/16in.
Wire Ends for Easy Fixing.
4/6 each, postage 2½d.
Technical Details and Selected Types available.

B.T.H. GERMANIUM CRYSTAL DIODES

Moulded in thermo-setting plastic.
4/6 each, postage 2½d.

SILICON DIODES, 3/6. Postage 2½d.
Fixing Brackets, 3d. pair.

COPPER INSTRUMENT WIRE
ENAMELLED, TINNED, LITZ
COTTON and SILK COVERED
Most gauges available.

B.A. SCREWS, NUTS, WASHERS
soldering tags, eyelets and rivets.
EBONITE AND BAKELITE PANELS.
TUFNOL ROD, PAXOLIN TYPE COIL FORMERS AND TUBES, ALL DIAMETERS.
ERIE AND DUBILIER RESISTORS.
Latest Radio Publications.

SEND STAMP FOR LIST. TRADE SUPPLIED

POST RADIO SUPPLIES
33 Bourne Gardens, London, E.4

Repaired *Standardised*

TEST METERS

THE ELECTRICAL INSTRUMENT REPAIR SERVICE
329 Kilburn Lane, LONDON, W.9. *Tel. LAD 4168*

TRANSFORMERS & COILS TO SPECIFICATION

MANUFACTURED OR REWOUND
Filter Coils ± 1% a Speciality.

JOHN FACTOR LTD.
9-11 EAST STREET, TORQUAY, DEVON
'Phone : Torquay 2162

TELEFUNKEN VALVES

Further supplies have just arrived
S.A.E. for list

JACKSON ELECTRICAL CO.
3 Terminus Place, Eastbourne

U.S. WAR SURPLUS WANTED

AFR-4, AFR-5, APR-1, ARC-3, etc.; TS-12, 13, 34, 35, 36, 45, 120, 146, 155, 173, 174, 175, 323 and other "TS-" units, etc., particularly for the MICROWAVE REGION; also U.S. commercial laboratory equipment (General Radio, Ferris, etc.); special tubes, such as 723A/B, 3C22, etc.; spare parts, technical manuals; single units or large quantities.

Sell direct to us, receive the full top price. Describe and price to :

ENGINEERING ASSOCIATES
434 Patterson Road
Dayton 9, Ohio, U.S.A.

THE AMOS & JOHNSTONE

FM FEEDER UNIT

Description commenced in last month's "W.W." pages 334-338. A simple unit for receiving the BBC experimental FM transmissions from Wrotham. Send stamp for complete priced list of coils, valves and other components as used by designers.

Pre-Tax L.S. Prices!

66⅔ Purchase Tax will increase prices of future supplies of loud speakers. Present TAX FREE stocks will not last long. Order NOW!

WHARFEDALE 10in. —Golden 3 ohm, 115/-; Bronze 8 and 15 ohm, 89/6; 8in. Bronze 3 and 15 ohm, 48/-. GOODMANS Axiom 60 10in. 15 ohm, 172/6. BAKER 10in. 15 ohm, 12 gns. TRUVOX RX11, 10in. 3 ohm, 70/-. DURACRAFT 10in. 3 ohm, 32/6. W.B. STENTORIAN 3 ohm, 9in. 15/6, 3in. 19/6, 6in. 30/9, 10in. (also 15 ohm) 44/6. VITAVOX 10in. 15 ohm £12/10, 170/-.

The Gramophone Amplifier

Designed by THE GRAMOPHONE Magazine. 8 watts output.

Only 0.15% harmonic at 8W, 0.1% at 6W. 30-20,000 c.p.s. A performance that would be outstanding at any price but only costs 17 gns. for the main amplifier, pre-amplifier 6 gns. Constructional details, 1/6 post free, show how you can make both units for about £19. Full specification on request.

BOOKS. "The Williamson Amplifier," 3/9; BBC Manuals "Sound Recording and Reproduction" 30/6, "Microphones" 15/6, "TV Receiver Practice," Holland, 5/4, "W.W." Radio Valve Data 2/10. Amplifiers, Briggs, 16/-. Loud Speakers, Briggs, 7/9.

Gramophone Equipment

We specialise in pick-ups, motors, single and auto changer players for standard and microgroove records by Acos, BSR, Chancery, Connoisseur, Decca, EMI, Goldring, etc. Factory fresh copies of Microgroove Records sent POST FREE to U.K. TAX FREE Overseas. Full list Decca, Capitol, Brunswick, London, Telefunken LP's, 1/04, post free. We also supply Allegro, Argo, Columbia, MGM, Wipa, Oriole and Parlophone LP 33⅓ and 45 r.p.m. microgroove records.

SEND STAMP FOR NEW LIST.

QUALITY MART

8a Dartmouth Park Ave., London, N.W.5

Mail Orders Only. GULliver 1131



Coil Winding Machines

of outstanding design and dependable performance

Please send your enquiries to:—

KOLECTRIC LTD

72, UXBRIDGE ROAD

EALING, LONDON W.5

NOTHING succeeds like success! What we have done a thousand times we can do again for you—see the B.N.R.S. advt., page 133.

FREE! Brochure giving details of home study training in radio, television, and all branches of Electronics; courses for the hobby enthusiast or for those aiming at the A.M.Brit.I.R.E., City and Guilds Telecommunications, R.T.E.B., and other professional examinations; train with the college operated by Britain's largest electronic organisation; moderate fees.—Write to E.M.I. Institutes, Postal Division Dept. W.W.28, 43, Grove Park Rd., London, W.4. (Associated with H.M.V.) [0001

BOOKS, INSTRUCTIONS, ETC.

BACK numbers of W.W. for sale, 1/- each.—Shackle, Garth House, Brickfield Lane, Hayes, Middx. [9040

I.P.R.E. technical publications. S.500 Alignment Peaks for Superheterodynes 5/9, post free; data for constructing TV serial strength meter, 7/6; sample copy "The Practical Radio Engineer," quarterly publication of the Institute 2/-; membership and examination data, 1/-.—Sec., I.P.R.E., 20, Fairfield Rd., London, N.8.

Surplus BARGAINS

MANUFACTURER'S & BANKRUPT STOCKS

LIMITED SUPPLIES ONLY

We can offer for immediate delivery

LARGE STOCKS of RESISTORS

ALL VALUES: ¼, ½, 1, 2, and 3 WATT.

Electrolytic Condensers—All Types

EX W.D. AERIALS—BRAND NEW—CAN ALSO BE USED AS FISHING RODS.

12ft. Light Steel Aerials in 3—4ft. sections, screw-in or plug-in type

BUY NOW!

Low and High Resistance Headphones

Belling Fuseholders, Plugs and Sockets; Tannoy Handmikes; Dinghy Transmitter Sets; Output and Mains Transformers; Valve Holders; Yaxley Type Switches; Burgoyne Solder Guns; Meters; Chokes; Coaxial Cable; Magnifying Lens; Rubber Masks, etc. etc.

Your enquiries are invited.

WHOLESALE AND EXPORT ONLY

For further bargains call at our Counter or write for NEW bulletin.

RADIO MERCHANDISE COMPANY LIMITED

65, Farringdon Road, London, E.C.1

Telephone: HOLborn 4317. Quote Dept. W.W.

RADIO G200 OFFERS

50 Ampere Rectifier Units Type 11A. Ref. SA/2247, S.T. & C. Rated as follows:—36V, 50A., at 50°C., input 380-440 Volts 50 c/ps. 3ph. Price £25 each.

EXPORT—IMPORT

ARTHUR HOILE 55 UNION STREET MAIDSTONE, KENT Telephone 2912

neo-MAINTEST

THE PERFECT FAULT FINDER

NEO ELECTRICAL INDUSTRIES LTD

MANCHESTER 4

H. FRANKS,

58, NEW OXFORD STREET, LONDON, W.C.1

PHONE: MUSEUM 9594.

One Minute from Tottenham Court Road Stn.

INDICATOR UNITS TYPE 184A. Fitted 3in. x 6in. Cathode Ray Tubes Type ACR.10 and V.C.R. 517B and 17 Valves, viz 6 R.92 5 V.R.91, 3 V.R.54, 3 V.R.65. Metal Rectifiers Chokes, Transformers, Potentiometers, Resistances, Condensers, etc. £5/10/- each Carr. paid.

STEP-DOWN, input 200/250 volts, 50 cycles, Output-tapped, 8, 16, 24, 32 volts, 15 amps. Price £3/7/6 each. Carr. paid.

STEP-DOWN TRANSFORMERS, input 230 volts A.C., 50 cys. Output 12 volts, 8 amps. Price 28/- each. Post paid.

OIL FILLED CONDENSERS. 50 + 50 mfd., 400 volts A.C. working, size, 8in. x 10in. x 6¼in. £1/10/- each. Carr. 5/-.

WESTINGHOUSE RECTIFIER SETS. Style 288 G.P.O. Input 200/250 volts A.C., 50 cycles, output 50 volts D.C. 1½ amps. £3/10/- each. Carriage 10/-.

LONDEX RELAYS, type 220 Ref. No 10F/494, two heavy break contacts, 24 volts, fitted in metal cases 4 x 4 x 2¼in., 8/6 each.

ADMIRALTY PATTERN. Heavy duty L.T. Transformers. Primary 230 volts A.C., 50 cycles 9 amps. Secondary 18 volts centre tapped 108 amps. Price £15 each. Carr. 20/-

SANGAMO MOTOR UNITS, Model 7, final speed one rev. 24 hours. 200/250V. A.C., 50 cycles. Price 27/6 each.

SANGAMO MOTOR UNITS, Model 7 final speed one revolution per seven days 200/250V. A.C. 50 cycles. Price 30/- each.

FERRANTI SYNCHRONOUS MOTORS, consumption 3 watts, fina speed 200 R.P.M. Price 16/6 each. Post paid

2 ENGLISH ELECTRIC IGNITION TESTERS, ex Air Min. Ref. No. 5G/417 Model U.E.D. Takes supply of vehicle under test of 6/12/24 V. D.C. or 230V. A.C. mains supply. Price each, less Harness £23/10/-. Carr. paid.

SYNCHRONOUS MOTORS. 200/250 V. A.C. 50 cycles. With Gear-trians. Final speed 1 rev. per hour.

EX TIME OPERATED UNITS by well-known makers. Size 3½ x 3½ x 3in. PRICE 21/6. Post paid.

DITTO, 2 revs. per hr. Size 3½ x 3 x 3½ins Price 16/6. Post paid. 1,000 of these unit available from stock.

MINIATURE IMPULSE MOTORS made by "Gents," size 3 x 2 x 1¼in. Suitable for operating models, switches etc. Operates on 4/6 volts A.C. D.C. and is very powerful for its size. Price 8/6 each. Post paid.

SANTON SWITCH-BOXES type E. Ref 5c/2468. Fitted three Santon switches and fuse box. All housed in one unit, size approx 14 x 10 x 3in. Price 22/6 each.

TURNBULL ELEC. CO., U.S.A., MULTI-BREAKER SWITCHES, 115/230 V. A.C. 70/100 amp. Max. fitted in metal cases 13 x 9½ x 3¾in. Packed in original cartons. Price 27/6 each. Carr. paid.

SEIZIUM SELENIUM RECTIFIERS, 250 V. 120 ma. Price 9/- each.

Apply for Full Mailing Lists. Price 6d. each.

We have a large selection of SELSYN Controls, MAGSLIPS, HUNTER magslips, SELSYN transmitters of various types. We invite enquiries for any of the above types.

10,000 G.P.O. type 3,000 and 600 relays, assorted contacts and coils. Siemens High Speed Relays, Uniselectors, Telephone Keys, Handsets etc.

Special Quotations for Quantities.

An assortment of various Ex-W.D. Radar and Radio Equipment, Relays, Power Packs, Oscillograph Units, Gears, Photographic Apparatus, available to callers only.

"TYANA"
SOLDERING IRON 16/9

The Perfect Small Soldering Instrument.

- Adjustable Bit.
- Easy to handle.
- Weight approx. 4 ozs
- Heating Time 3 min
- 40 Watt economy Consumption
- Standard Voltage Ranges (other Ratings Available on Request)
- Long Life and Efficiency.
- Replacement Elements and Bits always available.

Just the Convenient iron Required for Intricate and Fine Soldering.

Maintenance Service for Industrial users.

British made by:—

KENROY LIMITED
152-297 UPPER ST., ISLINGTON
LONDON, N.1.
Telephone: Canonbury 4905-4663

TELECRAFT
AERIALS ENSURE THE
BEST TELEVISION
TRY ONE AND SEE FOR YOURSELF

Easco RECTOSTAT
HOME BATTERY CHARGERS
2 Amp., 2-6-12 Volt. A.C. Mains
Prices £6. 6. 0

EASCO ELECTRICAL LTD.
6/8 BRIGHTON TERRACE,
LONDON, S.W.9
Telephone: BRixton 4961-2-3

TOROIDAL INDUCTORS
We have Winding Capacity available and from stock for immediate delivery.
BEL SOUND PRODUCTS CO.
Marlborough Yard, London, N.19
Tel.: ARChway 5078

ENGINEERS!
Whatever your age or experience, you must read "ENGINEERING OPPORTUNITIES." Full details of the easiest way to pass A.M.I.Mech.E., A.M.I.C.E., C. & G. (Electrical etc.), General Cert., etc., on "NO PASS—NO FEE" terms and details of Courses in all branches of Engineering:—Mechanical, Electrical, Civil, Auto., Aero, Radio, etc., Building, etc. If you're earning worthwhile £'s in work, tell us what interests you and write for your copy of "ENGINEERING OPPORTUNITIES" today—FREE!

144 PAGES *Free!*

B.I.E.T.
387 Shakespeare Hse.
17-19 Stratford Place
London, W.1.
BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY

VIEWMASTER

T.C.C. Condenser Kits	London	£7 7 0
	All others	£7 0 0
Resistor Packs.	All channels	£1 16 3
Instruction Envelopes		7 6

ALL VIEWMASTER PARTS IN STOCK
s.a.e. for list
R. E. HOPE, 13 Waddon Rd., Croydon, Surrey

MAGNETIC TAPE RECORDERS and COMPONENTS
from
WILL DAY, LIMITED
19 Lisle Street, London, W.C.2.
GERrard 7105 and 4476
SEND 1½d. STAMP FOR LIST—SENT BY RETURN

TESTOSCOPE *Mains Tester*
For high and low voltage testing:—
1/30 and 100/850 volts A.C. or D.C. Write for interesting leaflet 30F.

RUNBAKEN · MANCHESTER 1

RADIO COMPONENT SERVICE
TRF Chassis Punched 4/3 each.
TRF Coils MW dust cored 5/9 per pair.
TRF Coils L.M.W. Air spaced 7/6 per pair.
Superhet Coils dust cored 2/9 each.
I.F.T. dust cored 11/- per pair.
Send stamp now for New Catalogue.
All goods Guaranteed. Write to
Radio Component Service
68 Chesterfield Road, Leyton, E.10 LEY 4380

TRANSFORMERS
Specialists in the repair and manufacture of the Highest Quality Transformers, Chokes, etc., for over 30 years. Rewinds to all makes of Radio and Television transformers. Prompt delivery.
FORREST, SHIRLEY, BIRMINGHAM
Tel: SHI 2483.

THE AMOS & JOHNSTONE
F.M. FEEDER UNIT
for 87·5—100 mc/s
(SEPTEMBER ISSUE)
is Simple & Inexpensive

SMITHS of EDGWARE ROAD
can supply the complete set of parts as used by the designers, with chassis ready drilled, for **70/-** (less valves).
Priced component list on receipt of S.A.E.
H. L. SMITH & CO., LTD.
287/289 Edgware Road, London, W.2
Telephone: Paddington 5891
Hours 9 till 6 (Thursday, 1 o'clock)
Near Edgware Road Stations, Metropolitan & Bakerloo

COVENTRY RADIO
Component specialists since 1925
10,000
Radio Valves in stock, all types. Immediate delivery at current list prices. Full range of 1st Grade makes of components—Note we do NOT stock surplus, only new goods.
New list available shortly.
COVENTRY RADIO
189, Dunstable Road, Luton.

THE *HAYES* COMPANY
RADIOGRAM CHASSIS

- **9 VALVE CHASSIS MODEL RG 150**
  High-quality 8-watt push-pull output. Separate LF and HF units. Bass and treble boost controls. 3 wavebands.
- **7 VALVE CHASSIS MODEL RG 135**
  Push-pull output 6 watts. Negative feedback. Special tone control circuit. 3 wavebands. **£19 10/-.** (Also available for universal mains.)
- **5 VALVE CHASSIS MODEL RG 120**
  4-watt output. 3 wavebands. New type dial. Negative feedback. **£15 10/-.**

Fully illustrated details of all chassis gladly sent by return post. Demonstrations by appointment only please.

1 Alcester Road, Birmingham 13

LYONS RADIO Ltd.
RECEIVERS TYPE R.1155. One of the best known and most popular of ex Government communications receivers. Frequency range includes 20, 40 and 80 metre Ham bands and Long and Medium Wave transmissions. In brand new and unused condition and aerial tested before despatch. **PRICE £12 10/-,** carriage 7/6. We also have some of these receivers less transit cases in "used condition." They are in working order though this might not be perfect. **PRICE £6/17/6,** carriage as above but add **£1** for transit case which we refund when you return case.
A.C. MAINS R.1155. The working receiver as above in brand new condition complete with its 7 valves together with a POWER PACK/OUTPUT-STAGE UNIT which enables the receiver to be operated immediately from A.C. mains without any modifications. **PRICE £16 16/-,** carriage 10/-. The Power Pack/Output-Stage Unit separately or with a "Used" receiver **PRICE £5,** carr. 3/6.
MINE DETECTORS. This detector gives warning of the presence of metal objects in timber, underground or water, etc., and there are probably many applications for which this equipment can be used in addition to its original ons. We supply them complete in strong wood transit case the principal items being an A.F. amplifier employing 3-ARP12's (VP23) valves mounted in metal case with battery space 11 × 11 × 4½ins., search coils, control box pole front and rear sections, various canvas satchels, headphones, etc. Power requirements are 60 or 90 v. H.T. battery and 6 "U" type 1.5 v. cells (Not supplied). Condition is new and unused. **PRICE £3.19.6,** carriage 12/6.
CATHODE RAY TUBES TYPE VCR 97. Brand new and unused and TV picture tested to ensure freedom from cut-off. Supplied in makers shock-proof transit cases **PRICE 30/-,** carriage 5/-.
3, GOLDHAWK ROAD, (Dept. M.W.), SHEPHERDS BUSH, LONDON, W.12
Telephone: Shepherds Bush 1729

YOUR METER DAMAGED?

Leading Electrical Instrument Repairers to the Industry

Contractors to The Ministry of Supply.
Repairs by skilled craftsmen of all makes and types of Voltmeters, Ammeters, Microammeters, Multirange Test meters, Electrical Thermometers, Recording Instruments, Synchronous Clocks, etc. Quick deliveries—for speedy estimate send defective instrument by registered post to:—

L. GLASER & CO.
Electrical Instrument Repairers
96-100 ALDERSGATE STREET, E.C.1
(Tel.: MONarch 6822)

'Radiospares' Quality Parts

THE SERVICE ENGINEER'S FIRST CHOICE

NUTS, BOLTS, SCREWS AND WASHERS
ALL CADMIUM PLATED

SET 385 (Size 3BA). Assorted screws and bolts from 5/16in. to 1¼in. long, with plain hex. nuts, Pinnacle nuts, double anchor nuts, lock washers and plain washers. All rust proof. Average Contents, 650 Pieces 7/6, plus 6d. post.

SET 386 (Size 4BA). Assorted screws and bolts from ⅜in. to 1¼in. long, with plain hex. nuts, Nimmonds nuts, and plain washers. All rust proof. Average Contents, 600 Pieces 7/6, plus 6d. post.

SET 387 (Size 6BA). Assorted screws from ⅜in. to 1¼in. long, with plain hex. nuts, Nimmonds nuts, shake proof washers, and plain washers. All rust proof. Average Contents, 750 Pieces, 7/6, plus 6d. post.

By post, air-freight or ship, anywhere in the world. All sets well packed in compartmented boxes.

BERNARD F. WADE LTD.
2, WELLINGTON RD., ILKLEY YORKS.
Tel.: Ilkley 1707

MAGNETIC TAPE RECORDING

RECORDERS COMPLETE WITH HEADS AND TAPE .. .. 55 GNS.
RECORD/PLAYBACK HEADS 45/-
ERASE HEADS 45/-
IN POLISHED SCREENING CANS
OSCILLATOR UNITS 45/- COILS 8/-
RECORDING AMPLIFIERS, 5 WATTS, EQUALISATION AND BIAS £18

REPAIRS TO ALL MAKES OF RECORDERS
TRADE ENQUIRIES INVITED

KENTON LABORATORIES LTD.
271/3 BRIXTON RD., S.W.9 BRI 2147

Television • Radio • Record CABINETS MADE TO ORDER

ANY SIZE OR FINISH

CALL OR SEND DRAWINGS FOR QUOTATIONS

B. KOSKIE
72-76 Leather Lane, Holborn, E.C.1
Phone: HOLborn 4777

NEW LISTS
(ISSUED TO THE TRADE ONLY)

C&R3/52. "All about A.W.F. L/S Cone Assemblies" for repairs to speakers in your own workshops, and an up-to-date Repairs price list.

T4/52. "Full details of all components, etc., for the View Master" etc., giving the new nett and retail prices.

CL4/52. "Comprehensive Valve and Component List"

PRICE 3d. each (or 6d. the three). Post Paid in the U.K.
OVERSEAS AIR MAIL 2/- POST PAID.

A.W.F. RADIO PRODUCTS
TATLER CHAMBERS THORNTON ROAD
BRADFORD YORKS
Tel. 24008 *Cables and Grams. "Testube" Bradford*

VIEWMASTER • COMPONENTS
Send for special price list of items always in stock.

Radio and Television Components—large stocks held. Please send for our monthly bulletin, which always contains many exclusive bargain lines.

Loudspeakers 2½" to 12" Resistors •
Autochangers • Record Players •
Valves: Receiving & Transmitting •
Transformers: Power, Filament & I.F. •
Volume Controls • Condensers •
Electrolytic Paper S.M. • Radiogram
Walnut Cabinets • Plastic Radio Cabinets, etc.

Trade only supplied.

V.E.S. WHOLESALE SERVICES LTD.
11 GUNNERSBURY LANE, W. ACTON, W.3
Telephone: ACOrn 5027

WILKINSON'S of CROYDON
RELAYS. P.O. TYPE 3,000.
Built to your requirements. Large stocks held.

VOLTAGE REGULATORS. Input 230 volt A.C. 21 amps., output 57.5 to 228 volts in 14 Steps. With current limiting Reactor. £15.
VARIAC TRANSFORMERS. Type 80 CO. Input 200/240 v. Output 220 v. 7.5 amps. £7/10/- each.
SIGNAL AND NOISE GENERATOR. For Television frequencies 20-88 Mcs in 5 Bands. Crystal controlled. Leaflet available on request. Price £14/10/-.
AUTO TRANSFORMER. 230/115 volts 500 watts 50 cycles, fully shrouded, new. Made by Met. Vic. £4/10/- each.
PORTABLE ELECTRIC BLOWERS. 220/230 volts 220 watts. With 8ft. flexible hose and nozzle. 7 yds. C.T.S. flex. £7/10/-.
WHEATSTONE BRIDGE. Accuracy 0.01%. Five decades of "Thousands," "Hundreds," "Tens," "Units," "Tenths," with rotary switch ratio arm adjustments. Made by H. W. Sullivan Ltd.
P.O. STANDARD RACKS. 6ft. x 19in., heavy channel type, £7/10/-.
Operators desks for above, 15/- each.

19 LANSDOWNE ROAD, CROYDON CRO. 6839

AMAZING VALVE OFFER

6 BRAND NEW U.S.A. VALVES (in original boxes)
comprising:
2 off **VU111** High Voltage Rectifiers.
2 off **RK.34** V.H.F. Low Power Transmitters.
2 off **954** V.H.F. acorn Pentodes.

12/6 the **6**, post paid, Great Britain

WALTON'S WIRELESS STORES
48, STAFFORD STREET, WOLVERHAMPTON

INDEX TO ADVERTISERS

A.B. Metal Products, Ltd. 21
Acoustic Products, Ltd. 25
Acoustical Mfg. Co., Ltd. 17
Acru Electric Tool Mfg. Co., Ltd., The 70
Adcola Products, Ltd. 26
Advance Components, Ltd. 6
Aircraft Radio Industries, Inc. 78
Airmec Laboratories, Ltd. 15
Alexander Equipment, Ltd. 74
Allen, Richard, Radio, Ltd. 4
Allen Components, Ltd. 125
All-Power Transformers, Ltd. 57
Aloha Radio Supply Co., The 125
Altham Radio Co. 58
Amplex Appliances (Kent), Ltd. 72
Amplivox, Ltd. 62
Andern Radio, Ltd. 62
Anticference, Ltd. 10
Arcolectric Switches, Ltd. 129
Armstrong Wireless & Television Co., Ltd. 67
Arrow Sales, Inc. 77
Ashdown, H. 66
Ashworth, H. 19
Associated Cine Equipments, Ltd. 28
Automatic Coil Winder & Electrical Equipment Co., Ltd., The 48
Automatic Telephone & Electric Co., Ltd. 1, 16b
Autoset (Production), Ltd. 49
A.W.F. Radio Products 156
B. & H. Radio 116
Bakers "Selhurst" Radio 125
Barker Natural Reproducers 11
Bel Sound Products, Ltd. 127
Belling & Lee, Ltd. 154
Bennett College, Ltd., The 40
Berry's (Short Wave), Ltd. 72
Bird, S. S., & Sons, Ltd. 28
Birmingham Sound Reproducers, Ltd. 44a, 89
B. K. Partners, Ltd. 9
Bradmatic, Ltd. 26
Brisain, Chas. (Radio), Ltd. 115
British Communications Corpn., Ltd. 79
British Institute of Engineering Technology 127, 154
British Insulated Callender's Cables, Ltd. Cover ii
British National Radio School 135
British Physical Laboratories 16, 48
British Zarzoal, Ltd. 116
Brookes Crystals, Ltd. 150
Brown, S. G., Ltd. 90
Buchan, A. E. 124
Bulgin, A. F., & Co., Ltd. 76, Edit. 457
Bull, J., & Sons 61
Bullers, Ltd. 16
Candler System Co. 128
Caxton Publishing Co., Ltd. 94
Chaffey Cabinet Co., The 154
Champion Products 126
Chapelle, Ltd. 66
Chapman, C. T. (Reproducers), Ltd. 152
Cinema Television, Ltd. 19
City & Rural Radio 56
City Sale & Exchange, Ltd. 54
C.J.R. Electrical & Electronic Development, Ltd. 22
Classic Electrical Co., Ltd. 59
Clydesdale Supply Co. 108, 109
Cohen, L. 110
Colaro, Ltd. 40
Commocord, Ltd. 84
Consor, A. C., Ltd. 88
Coventry Radio 134
Davis Aec Supplies, Ltd. 60, 125
Davis, Jack (Relays), Ltd. 70
Day, Will, Ltd. 134
Direct T.V. Replacements 8
Dubilier (Condenser Co. (1925), Ltd. 128
Dublier Condenser Co. (1925), Ltd. 44d
Duke & Co. 88
Dun Electronics 135
Easco Electrical, Ltd. 150
Edison Swan Electric Co., Ltd. 134
Egen Electric, Ltd. 51, 95
Electradix Radios 6
Electrical Instrument Repair Service, The 120
Electro-Acoustic Developments 152
Electro Acoustic Industries, Ltd. 120
Electro-Acoustic Laboratories 8
Electronic Precision Equipment 135
Electronic Service (Hallamshire), Ltd. 96, 97, 98, 99
E.M.G. Handmade Gramophones, Ltd. 76
E.M.I. Institutes 151
Engineering Associates 90, 94
English Electric Co., Ltd., The 152
Enthoven, H. J., & Sons, Ltd. 15, 116
Erg Industrial Corpn., Ltd. 5
Erie Resistor, Ltd. 58
Excel Sound Services, Ltd. 47
Factice & Chemical Supplies, Ltd. 44
Factor, J., Ltd. 70
Ferranti, Ltd. 152
Field, Norman, H. 41
Fleetech (Electronics), Ltd. 76
Fluxite, Ltd. 71
Forrest, H. W. 127
Foyle, W., & G., Ltd. 124
Frith Radiocraft, Ltd. 72
Furzehill Laboratories, Ltd. 58
Galpins 119
Garland Bros. 104, 105
Garrard Engineering & Mfg. Co., Ltd., The 62
Gee Bros. Radio, Ltd. 129
General Electric Co., Ltd. 16d, 51
General Motors, Ltd. (Frigidaire Division) 58
Glaser, L., & Co. 135
Goodmans Industries, Ltd. 45
Goodsell, Ltd. 2
Gramophone Co., Ltd., The 52b
Grampian Reproducers, Ltd. 56
Gray, Arthur, Ltd. 76
Hall Electric, Ltd. 69
Hallam, Sleigh & Cheston, Ltd. 24
Hanney, L. F. 54
Hatfield Instruments 22
Hayes Co., The 122
Haynes Radio, Ltd. 54
Henley's, W. T., Telegraph Works Co., Ltd. 111
Henry's 115
Hivac, Ltd. 16a
Hivoli, Ltd. 44
Holle, Arthur 122
Holley's Radio Stores 111
Homerad Instruments, Ltd. 52
Hope, R. E. 154
Howorth, P. 128
H.P. Radio Services, Ltd. 112
Hunt, A. H., Ltd. 55
Hyde, J. B., & Co., Ltd. 50
Iliffe & Sons Ltd. 42
Imhof, Alfred, Ltd. 20
Industria Electronics 144
International Correspondence Schools 28
Jackson Electrical Co. 132
Jay Developments 62
Joyce, Loebl & Co., Ltd. 54
Kaye Electrical Distributing Co. 130
Kenroy, Ltd. 124
Kenton Laboratories, Ltd. 66
Kolectric, Ltd. 129
Koukie, B. 66
Lasky's Radio 100, 101, 102, 103
Leak, H. J. & Co., Ltd. 95
Lewis Radio Co. 128
Lockwood & Co. 150
London Central Radio Stores 70
Lowther Mfg. Co. 50
L. R. Supply Co., Ltd. 153
Ludfry, Ltd. 128
Lustraphone, Ltd. 121
Lyons Radio 124
Magneta Time Co., Ltd., The 12
Mail Order Supply Co. 63, 64, 65
Marcon Instruments, Ltd. 29
Marconi's Wireless Telegraph Co., Ltd. 16c, 52, 86, 91
Marks, C., & Co. 116
McElroy-Adams Mfg. Group, Ltd. 74
McMurdo Instruments Co., Ltd. 60
Measuring Instruments (Pullin), Ltd. 75
Miers, N., & Co., Ltd. 24
Minnesota Mining & Mfg. Co., Ltd. 14
Modern Book Co. 118
Modern Electrics, Ltd. 74
M.R. Supplies, Ltd. 46
M.S.B. Recording Co., Ltd. 115
Mullard, Ltd. 3, 67, 82
Multicore Solders, Ltd. Cover iv
Murex, Ltd. 44
Neo Electrical Industries, Ltd. 122
Newman, J. & S., Ltd. 46
Nikad Supplies 114
Northall, L. C. 132
Northern Radio Services 4
Nusound Products 135
Oddie, Bradbury & Cull, Ltd. 128
Olympic Radio Components 130
Osmor Radio Products, Ltd. 75
Palmer, C. A. S. 18
Panrek Magnetic Recording, Ltd. 46
Parsonage, W. F., & Co., Ltd. 122
Partridge Transformers, Ltd. 117
P.C.A. Radio 58
Pearce, T. W. 126
Pearson, M. & J. 116
Philips Electrical, Ltd. 68
Post Radio Supplies 10, 152
Pratts Radio 76
Premier Radio Co. 55, 56, 57
Price, Norman (Publishers), Ltd. 30
Pye Telecommunications, Ltd. 52a
Quality Mart 129
Quartz Crystal Co., Ltd. 126
Radio & Electrical Mart, The 78
Radio Component Service 120
Radio Exchange Co. 58
Radio Mail 42
Radiomenders, Ltd. 68
Radio Merchandise Co., Ltd. 135
Radio Resistor Co., Ltd., The 39
Radiospares, Ltd. 134
Radio Supply Co. 111
Radio Traders, Ltd. 22
Rainbow Radio Mfg. Co., Ltd. 20
Redifan, Ltd. 42
Reproducers & Amplifiers, Ltd. 77
Ridgway, J. R. & Co. 139
Rodine Laboratories 30
Rogers, D. 132
Rogers Development Co. 20
Ro.a-Ce.astion, Ltd. 94
Rollet, H., & Co., Ltd. 126
Rudman Darlington (Electronics), Ltd. 50
Runbaken Electrical Products 130, 154
Ryall, G. A. 122
Salford Electrical Instruments, Ltd. 24
Salis, A. T. 118
Sampsons Surplus Stores 126
Sangamo Weston, Ltd. 92
Savage Transformers, Ltd. 71
Scophony-Baird, Ltd. 12
Sifam Electrical Instruments Co., Ltd. 14
Simmonds Aerocessories, Ltd. 27
Simon Sound Service 69
Sky-Masts 120
Smith, G. W. (Radio), Ltd. 131
Smith, H. L., & Co., Ltd. 122
Smith, W. H. & Son, Ltd. 8
Solartron Laboratory Instruments, Ltd. 7
Sound Discs (Supplies), Ltd. 42
Sound Sales, Ltd. 92
Southern Radio Supply, Ltd. 120
Spencer-West 74
Standard Telephones & Cables, Ltd. 43, 85, 87
Steatite & Porcelain Products, Ltd. 25
Stern Radio, Ltd. 106, 107
Stratton & Co., Ltd. 75
Sugden, A. R., & Co. (Engineers), Ltd. 32
Supacoils 125
Szymanski, S. 78
Tannoy Products, Ltd. 28
Taylor Electrical Instruments, Ltd. 37
Telecraft, Ltd. 14, 134
Telegraph Condenser Co., Ltd. Cover iii
Telegraph Construction & Maintenance Co., Ltd., The 35
Telemechanics, Ltd. 32
Tele-Radio (1943), Ltd. 121
Thermionic Products, Ltd. 52
Thomas, Richard & Baldwins, Ltd. 52a
Toubkin, J. 130
Trix Electrical Co., Ltd. Edit. 435
T.R.S. Radio 150
United Electric 68
Universal Electronics 68
University Electrical Instruments Corpn. 112
University Radio, Ltd. 114
Vairadio, Ltd. 60
Verdik Sales, Ltd. 18
V.E.S. Wholesale Services, Ltd. 116
Vokat Patents, Ltd. 132
Vortexion, Ltd. 89
Wade, B. F., Ltd. 135
Walton's Wireless Stores 135
Wayne Kerr Laboratories, Ltd., The 54
Webb's Radio 132
West End Radio, Ltd. 130
Westinghouse Brake & Signal Co., Ltd. 36
Wharfedale Wireless Works 32, 73
Wilco Electronics 124
Wilkinson, L. 135
Woden Transformer Co., Ltd. 79
Wolf Electric Tools, Ltd. 34
Wright & Weaire, Ltd. 90
Young, C. H. 77

ALWAYS "FIT"

AUTOSET

SUSPENSION DRAWER SLIDES, SUN and PLANET FRICTION ELIMINATORS and SHEAVES

Ask for Brochure and pages 47, 49 and 53



Engineers, Patentees and Sole Manufacturers,

AUTOSET (PRODUCTION) LTD., DEPT. "H", STOUR STREET, BIRMINGHAM 18

Tel.: EDG. 1143/44 *Please mention Wireless World* ESTD. over 30 years

Printed in Great Britain for the Publishers, ILIFFE & SONS LTD., Dorset House, Stamford St., London, S.E.1., by CORNWALL PRESS LTD., Paris Garden, London, S.E.1. *Wireless World* can be obtained abroad from the following: AUSTRALIA AND NEW ZEALAND: Gordon & Gotch, Ltd. INDIA: A. H. Wheeler & Co. CANADA: The Wm. Dawson Subscription Service, Ltd.; Gordon & Gotch, Ltd. SOUTH AFRICA: Central News Agency, Ltd., William Dawson & Sons (S.A.), Ltd. UNITED STATES: The International News Co.

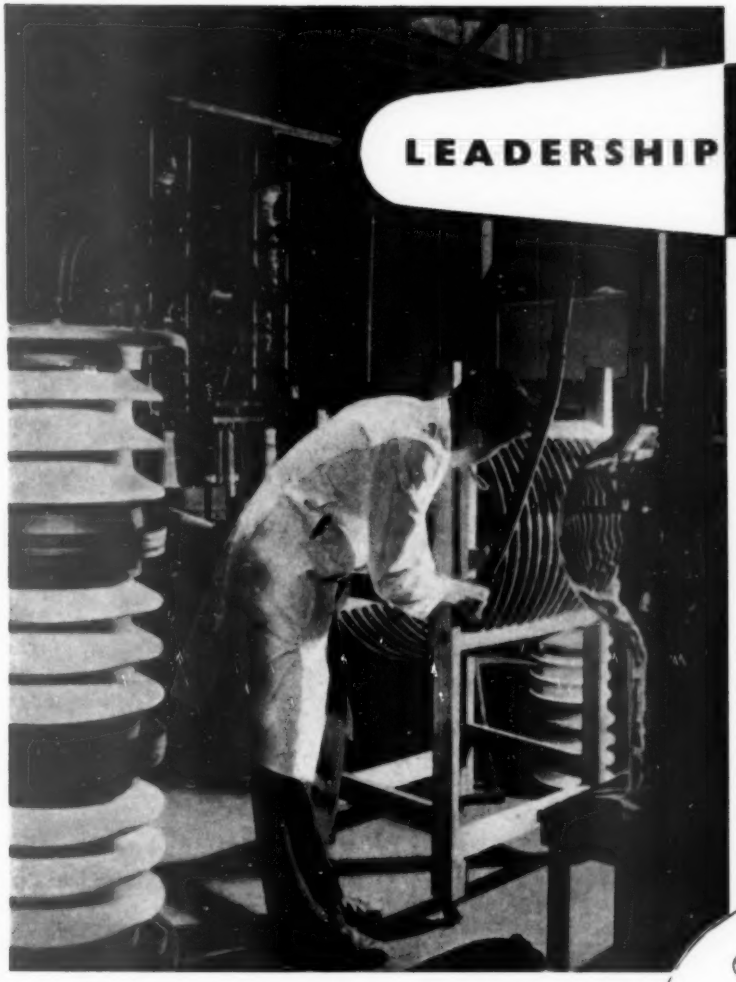

LEADERSHIP

Quest and Test—symbols of Condenser Perfection

Many know us as manufacturers of vast quantities of small condensers — those ranges in constant demand for electronic needs and electrical appliances. There are also important sections at T.C.C. where giant High Voltage types, as used, for example, in radio transmitters and for industrial power factor correction, are designed and built. This is indeed condenser making on the grand scale, involving specialised knowledge and experience, and demanding skill and precision.

The illustration shows final checking in high-voltage test bay.

TCC

SPECIALISTS IN CONDENSERS SINCE 1906

THE TELEGRAPH CONDENSER CO. LTD · *RADIO DIVISION* · LONDON · W.3 · Tel: ACORN 0061 (9 lines)

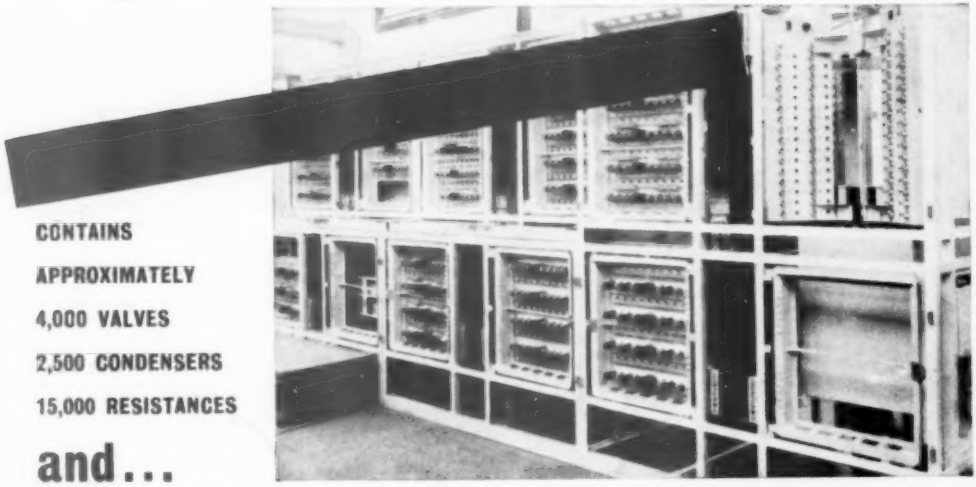

CONTAINS
APPROXIMATELY
4,000 VALVES
2,500 CONDENSERS
15,000 RESISTANCES
and...

100,000 joints, all soldered with

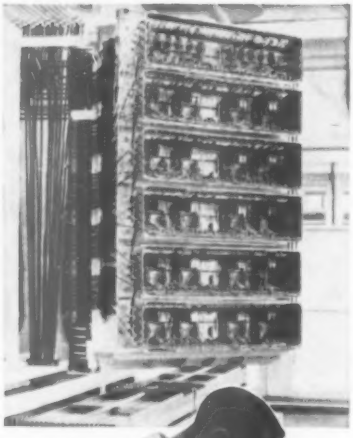

ERSIN MULTICORE

This Ferranti machine can perform far more arithmetical calculations in a day than the average man can do in a life-time. But here's *one* question that the machine couldn't answer a micro-second quicker than an electronic engineer who uses Ersin Multicore Solder: *How many doubtful joints are there in the Digital Computer?* The answer is a very round O. Why? Because Ersin Multicore Solder contains three cores of exclusive extra-active, non-corrosive Ersin Flux, which ensures instantaneous melting, unbroken flux continuity and complete freedom from "dry" or H.R. joints. That is why it was chosen for this vitally important job.

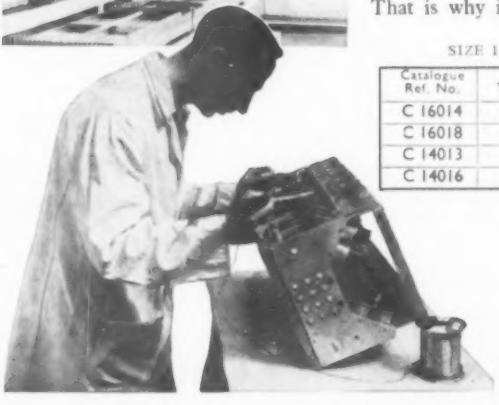

SIZE 1 CARTONS 5/- RETAIL

Catalogue Ref. No.	Alloy Tin/Lead	S.W.G.	Approximate length per carton
C 16014	60 40	14	13 feet
C 16018	60 40	18	37 feet
C 14013	40 60	13	13 feet
C 14016	40 60	16	26 feet

7 lb. reel for factory use. Size 1 carton for service engineers.

MULTICORE SOLDERS LTD., MULTICORE WORKS, MAYLANDS AVENUE, HEMEL HEMPSTEAD, HERTS. BOXmoor 3636 (3 lines)